

# PRODUCT GUIDE 2016

**AV products  
for professionals**



*Flightcases and transportcases*  
*AV furniture*  
*Interpreter booths*  
*AV Wall, ceiling and truss mounts*  
*AV Presentation systems, displays and kiosks*  
*AV Lift systems*  
*Audio solutions*  
*Video conferencing products*

# What's **NEW**...

Listen to the market and walk a few steps ahead. That is what we do at Audipack. Thanks to our in-house manufacturing, we can quickly respond to the needs of our customers and develop new and better products. Below an example of our novelties.

## **What if your specific wishes/demands are not available in a standard Audipack product?**

No worries, Audipack adapts, redesigns or develops a solution for your needs, at surprisingly affordable costs.

Inventing special solutions is in our blood. Simply contact us and challenge us with your request.



**NEW LSS-BOOMERANG**, a perfect audio solution for columns, **Page 6**



**NEW LSS-1000AR**, compact line array speaker, **Page 6**



**NEW LSS-UFO**, design audio solution for public areas, boardrooms and shops, **Page 7**



**NEW FS-V600**, a large screen floor stand for screens up to 100", **Page 25**



**NEW EC-1 and EC-1AC**, equipment holders for Mac Mini, Barco clickshare mini etc., **Page 26**



**NEW 390968**, a manual height adjustable stack-lift for screens up to 90", **Page 33**



**NEW FSW-ATLAS**, an All-in-One trolley with integrated audio and connections, **Page 35**



**NEW FWA-500, FWA-700 wall arms**, All-in-One project solutions, **Page 63**



**NEW CTF-ATLAS**, unique ceiling to floor with integrated soundbar, **Page 75**



**NEW FSMI series**, housings with open front, ideal screens for shops, **Page 109**



**NEW FPD series**, indoor presentation displays, with safety glass front, **Page 121**



**NEW Tablet housings**, updated range, **Page 171**

## Audio Solutions

Soundbar audio solutions for flat panels .....	3
Audio solutions for boardrooms and public areas .....	6

### Flat Panel Solutions



<b>Floorstands &amp; supports</b>	
700 series floor stands .....	9
800 series floor stands .....	17
900 series floor stands .....	21
1000 series floor stands.....	29
Height adjustable floor stands .....	31
All-in-one trolley .....	35
Presentation trolleys.....	37
Table stands and mounts .....	41

<b>Mounting solutions</b>	
Flat panel mounting brackets .....	43
Video wall mounting solutions .....	45
Wall mounts .....	53
Flat panel presentation board .....	57
Wall arms .....	61
Ceiling mounts.....	65
Ceiling to floor solutions.....	71
Column mounts .....	77
Truss mounts.....	79

<b>Lift systems</b>	
Wall mounted lift systems .....	81
Table lift systems .....	85
Garden-view.....	87
Floor lift systems.....	89
Vertical ceiling lift systems .....	91
Fold down ceiling lift systems .....	93
Pop up lift systems.....	97
Artwork and panel lift systems .....	101
Liftomatic® rental systems .....	103

<b>Housings &amp; kiosks</b>	
Indoor housings.....	107
Outdoor housings.....	117
Presentation kiosks and displays.....	119

### Projector-solutions



Projector mounts .....	123
Ceiling mounts.....	125
Truss mounts.....	131
Short throw wall mounts.....	135

<b>Stacking solutions</b>	
Stack- and rigging frames .....	137

<b>Housings</b>	
Indoor open air housings .....	139
Outdoor housings.....	143
Silencer housings .....	145
Smoke, dust and pool protective housings .....	147

<b>Lift systems</b>	
Ceiling lift systems .....	149
Pulley service lift systems .....	156
Mirror-Kit projection systems .....	161
Pop up lift systems.....	165
Liftomatic® rental systems .....	167

<b>Rotation systems</b>	
Rota-Kit®, rotate your projector .....	169

### Tablet solutions

Tablet housings .....	171
-----------------------	-----

### Video conference solutions

Video conference .....	175
------------------------	-----

### Flightcases and transport cases

Flightcases and transport cases .....	181
---------------------------------------	-----

### AV furniture

AV furniture .....	185
--------------------	-----

### Silent series interpreter booth

Silent series interpreter booth .....	187
---------------------------------------	-----

### Specials & projects

Specials & projects .....	193
---------------------------	-----

# Audipack – your partner whatever the application

## Digital signage



Page 45



Page 107



Page 122

## Education



Page 35



Page 37



Page 81

## Home cinema



Page 61



Page 98



Page 150

## Marine



Page 61



Page 93



Page 97

## Professional AV



Page 28



Page 150



Page 161

## Video conference



Page 57



Page 175



Page 179

## Rental



Page 32



Page 103



Page 167

## Racing



Page 181



Page 181



Page 181

## Staging



Page 21



Page 137



Page 131

## Conference



Page 145



Page 185



Page 187

## Did you know that...

All Audipack products, whether standard or custom built, are designed and manufactured in-house in the Netherlands. Our products are developed in conjunction with our clients to meet the needs of AV professionals and end users. They are designed for ease of use and durability for many years. Audipack manufacture high quantity standard products or unique made-to-measure pieces for individual projects. Many products are CE, EMC tested and TUV approved to meet safety regulations. Audipack also offers a 3 to 5 year factory warranty on all products.\*



\*Warranty conditions are available on requested and are stated in our general conditions of sale.

All dimensions and weights are approximate, and should not be used for specifications.

The general terms and conditions of sale and delivery are as registered in the trade register at the Chamber of Commerce of Gouda under no. 29031068 and the District Court of Rotterdam under no. 369/92 are applicable to all our deliveries.



# ***Audio solutions***

## ***Sound and Design***

### **Audio solutions**

*Perfect audio add-on solution for flat panels and video walls. Design audio solutions to integrate speakers visually less obtrusive in public areas.*



**Audipack®**

*It's great to have solutions...*

# Professional audio solutions



Wall mounted soundbar with 84" screen

## ***The perfect audio add-on for any screen of any size videowall***

Finding a fitting solution like this is normally quite a quest to find, but Audipack manufactures custom built soundbars and audio solutions to fit any screen, presentation assembly or videowall.

The main advantage is that these speaker solutions are custom built for any application and provides mounting features to any Audipack related product. No need to install more components than needed and save time by simply combining products that match each other.

## ***Soundbar solutions for any screen***

For the soundbar products, a special production method is designed. It's possible to create a soundbar that, no matter the length, the sound quality remains the same. It is even possible to incorporate 3 audio channels in one soundbar (LCR).

The internal segmentation of the components makes it possible to integrate a small amplifier or 100 volt transformer and enable it to work as a stand-alone item. This can be done even when the speaker is already installed.

With it's modern aluminium anodized housing and black front it's simply a modern and welcome addition to the screen and audiovisual application. For installing the speaker systems Audipack has created all possible mounting solutions to trolley's, wall- and lift systems and rental floor stands.


Based on the same technology Audipack has developed special ceiling suspended and column mounted speaker systems.

The line array speakers are perfect for public applications and provides a professional sound that doesn't need to be supported by subwoofers.




## ***Optional***

- ▲ **Wall mounts**
- ▲ **Ceiling mount**
- ▲ **Mounts to Audipack presentation systems**
- ▲ **Stereo mini amplifier**

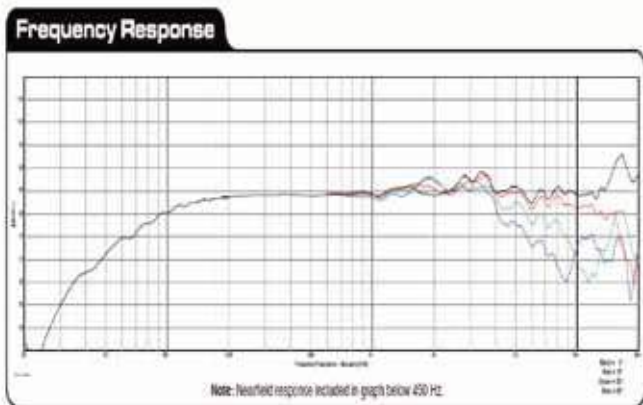

(component only)

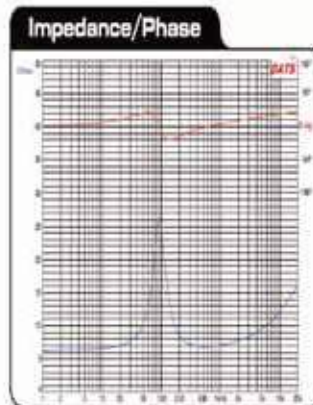

## SOUNDBAR FOR FLAT PANELS



## SOUNDBAR STEREO



Ref	LSS-XXXXSB
Dimensions in mm	W (screen) x D 143 x H 147
Max. power	2 x 30 Watt RMS at 8 Ohm
Frequency	70 Hz - 20 KHz
Connection	wire connect with internal connector

The LSS soundbar is made to match the screen, XXXX refers to the screen width in mm.

The LSS soundbars are manufactured for every brand, please refer to the Audipack website & price list for an updated product list.

## SOUNDBAR 3-CHANNEL (LCR)



Ref	LSS-XXXXSB-LCR
Dimensions in mm	W (screen) x D 143 x H 147
Standard power	3 x 30 Watt RMS at 8 Ohm
Optional	2 x 60, 1 x 30 Watt RMS at 8 Ohm
Frequency	70 Hz - 20 KHz
Connection	wire connect with internal connector



LCR 3-channel soundbar speaker system is suitable for surround sound or video conferencing.

The LSS soundbar is made to match the screen, XXXX refers to the screen width in mm.

The LSS soundbars are manufactured for every brand, please refer to the Audipack website & price list for an updated product list.

## MINI SOUNDBAR FOR VIDEO CONFERENCE



Ref	LSS-SB20	LSS-SB40
Dimensions in mm	W 422 x D 143 x H 147	W 422 x D 143 x H 147
Description	mono internal soundbar	stereo internal soundbar
Max. power	1 x 30 Watt RMS	2 x 20 Watt RMS
Frequency	70 Hz - 20 KHz	70 Hz - 20 KHz

This model fits the VCF-SL videoconference furniture line (page 175)

## AUDIO SOLUTIONS

**TWIN SPEAKER SET****Ref.****LSS-30**

Dimensions in mm

W 147 x D 143 x H 420

Max power

2 x 30 Watt RMS at 8 Ohm (set of two piece)

Nett weight per piece

3,2 Kg

Connections

wire connect &amp; banana plug

Colour

Aluminium anodized with black or white speaker front



Compact 'profile' stereo speaker set suitable for music, surround and voice enhancement. Very neat and well finished speaker set. In combination with the LSS-80SW subwoofer an impressive audio set.

**LINE ARRAY SPEAKER SYSTEM (STACKABLE)****Ref.****LSS-1000AR**

Dimensions in mm

W 147 x D 143 x H 1000

Max power

240 Watt per unit at 8 Ohm

Connections

Speakcon

Wall mounts

Included

Colour

Aluminium anodized with black or white speaker front



Compact line array speaker with full range elements per speaker housing. Suitable for wall mounting. Ideal for public places, large meeting rooms, churches etc. A perfect speaker for speech and multimedia support.

**PROFILE SPEAKER SET (CUSTOM-BUILT)****Ref.****LSS-(XXXX)-PR**

Dimensions in mm

W 147 x D 143 x H XXXX (height screen)

Max power

30 Watt RMS at 8 Ohm

Connections

wire connect &amp; banana plug

Colour

Aluminium anodized with black or white speaker front



The Profile speaker set is a vertical orientated speaker set made to match the height of larger screens and videowalls. The Profile speaker is installed on each side of the screen and is available in 2 x 30 Watt and 2 x 60 Watt. Custom powered versions on request.

**Check the Audipack website & price list for an updated product list.**



## SOUNDBAR RING SOLUTIONS

NEW



## Unique audio solutions for public areas and boardrooms

With the LSS-UFO, Audipack presents a new way to look at audio. The modern design of the UFO offers lots of possibilities for applications in public areas and boardrooms. The UFO is a ceiling suspended speaker with 4 internal audio elements. These elements radiate the sound in the direction of their own, so that a broad beam width is created in the area. The UFO is suspended from the ceiling by 4 stainless steel wires which are adjustable in length up to 4 meters.

The combination of the aluminium anodized construction with the black or white front, not only make it a delight to look at, but also to listen to.

In combination with modern lighting technique, the UFO is a perfect solution above a conference table, in a restaurant or luxury shop.

By using multiple UFO's, you have stereo sound where ever you walk in de room.

With the optional 100 Volt transformer, the UFO's are also usefull in 100 Volt installations.

**Ref.****LSS-UFO**

Dimensions in mm

W 706 x D 706 x H 146

Max. power

4 x 30 Watt RMS at 8 Ohm

Frequency

70 Hz - 20 KHz

Connection

wire connect with internal connector

Colour

Aluminium anodized with black or white speaker front



## AUDIO SOLUTIONS FOR COLUMNS &amp; CORNER INSTALLATIONS

NEW

## Design sound solutions for public places

The LLS-Boomerang offers an elegant solution for placing speakers on columns and corners in public areas. With the Boomerang, the speakers are visually less obtrusive. This unique angled speaker can be mounted around the corner of a wall or to a square or round column. The Boomerang is a speaker unit with multiple driver system and has therefore a wide beam width.

With two Boomerang speakers, the entire column is surrounded and there is sound on all four sides, with the advantage that there are not four but only two systems are required. In addition, the Boomerang is custom available to the width of the column or diameter. With the optional 100 Volt transformer, the Boomerang's are also usefull in 100 Volt installations.

**Ref.****LSS-BOOMERANG**

Dimensions in mm

W 566 x H 566 x D 146

Max. power

2 x 30 Watt RMS at 8 Ohm

Frequency

70 Hz - 20 KHz

Connection

wire connect with internal connector

Colour

Aluminium anodized with black or white speaker front

Wall mounts

Included



## AUDIO SOLUTIONS

## ACCESSORIES

## STEREO MINI AMPLIFIER

For:  
LSS-UFO  
LSS Soundbar  
LSS Profile



**Ref. 491004**  
Max. power 2 x 15 Watt bij 4 Ohm / 2 x 8 Watt bij 8 Ohm

## ACTIVE SUB WOOFER



**Ref. LSS-80SW**  
Max. power 80 Watt  
Connection 2 x cinch, wire connect & banana plug  
Power supply 100-230 VAC

## 100 VOLT TRAVO



**Ref. 491019**  
100 Volt transformator

## MOUNTING SOLUTIONS



**Ref.**  
Mounting interface



For:  
LSS Soundbar  
LSS Profile

**Wall mount set**  
**LSS-SBWM (set of 2)**  
M6



**Table stand medium**  
**LSS-TSSBV4**  
400 mm, M6



For:  
LSS Soundbar

**Table stand large**  
**LSS-TSSBV6**  
600 mm, M6

## MOUNTING SOLUTIONS



**Ref.**  
Mounting interface  
Suitable for

**LSS-30CM**  
28 x 28 mm  
LSS-30 + UTS ceiling mount



**LSS-DWS-T**  
400-600 mm  
DWS-T100 & DWS-T150



**LSS-DWS-E**  
600 mm  
DWS-120E & DWS-160E

## SOUNDBARS TO FLOOR STANDS



**Ref.**  
Interface for LSS soundbar

**LSS-FS700**  
400 & 600 mm



**LSS-FS700D**  
400 & 600 mm



**LSS-FS800**  
400 & 600 mm

**LSS-FS900**  
400 & 600 mm

# 700 series

## Flat panel floor stands

### **The 700 series Flat panel floor stands**

The well-known Audipack 700 series is a range of double column supports and stands for flat panels offering stability combined with flexibility.

It's a concept that meets the functional, technical and aesthetic demands of today's professional presentations.



**Audipack®**

It's great to have solutions...



# Audipack 700 series, designed to be **displayed!**



- ▲ **Landscape or portrait screen positioning**
- ▲ **Integrated cable channels**
- ▲ **Continuously adjustable flat panel height**
- ▲ **Standard or custom built models available**

## **The Audipack 700 series flat panel floor stands – presentation solutions offering many advantages.**

The Audipack 700 series is a range of supports and stands for flat panels that offers precision combined with flexibility.

Meeting the functional, technical and aesthetic demands of today's professional presentations, they create a base for numerous applications where design, safety, user-friendliness and flexibility are key requirements.

### **Choose your interface.**

The FS series is available with 2 different screen interfaces. The L&S 5 is the Audipack's AV cross rental solution with a wide variety of installation options on the job. The Mult-Vesa solution is a very cost effective mounting interface based on the Vesa mounting pattern on the screen.

With mounting cams the screen can easily be locked in the mounting head.



L&amp;S 3



Mult-Vesa

### **The perfect rental combination.**

The 700 series quick release floor stands can be separated by hand and fitted into an Audipack flight case along with the flat panel. Available for any screen size.

Flight cases are available in different colours with optional logo prints. Please refer to our separate flight case section on page 193 for more flight case solutions.



Detachable (cable) covers

Available with  
scratch resistant coating

Neatly concealed cables

Quick release,  
perfect rental solution



## 700 SERIES FLOOR STANDS

## 700 SERIES FLOOR STANDS DOUBLE COLUMN



L&amp;S 3




Multi-Vesa

Ref.	390700	FS-700V6	Max. "	Max. Kg
Dimensions in mm	W 900 x D 450 x H 1821	W 900 x D 450 x H 1821	55	60
Mounting interface	L&S 3	VESA 200, 400, 600		
Nett weight	39 Kg	39 Kg		
Ref.	390701 (BK*)	FS-701V6	Max. "	Max. Kg
Dimensions in mm	W 900 x D 450 x H 1829	W 900 x D 450 x H 1829	55	60
Mounting interface	L&S 3	VESA 200, 400, 600		
Nett weight	45 Kg	45 Kg		
Ref.	390702 (BK*)		Max. "	Max. Kg
Dimensions in mm	W 900 x D 530 x H 2029		65	60
Mounting interface	L&S 3			
Nett weight	46 Kg			
Ref.	390707 (BK*)		Max. "	Max. Kg
Dimensions in mm	W 900 x D 530 x H 1829		65	85
Mounting interface	L&S 3			
Nett weight	49 Kg			
Ref.	390708		Max. "	Max. Kg
Dimensions in mm	W 900 x D 530 x H 1821		65	85
Mounting interface	L&S 3			
Nett weight	42 Kg			

\* Available with scratch resistant floorplate, for example: Ref.: **390701BK**

## 700 SERIES FLOOR STANDS ON WHEELS

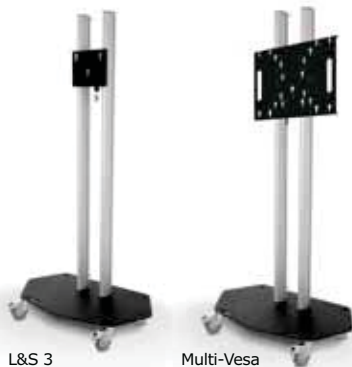

L&amp;S 3



Multi-Vesa

Ref.	390704	FS-704V6	Max. "	Max. Kg
Dimensions in mm	W 900 x D 530 x H 1804	W 900 x D 530 x H 1804	65	60
Mounting interface	L&S 3	VESA 200, 400, 600		
Nett weight	40 Kg	40 Kg		
Ref.	390705		Max. "	Max. Kg
Dimensions in mm	W 900 x D 530 x H 1812		65	60
Mounting interface	L&S 3			
Nett weight	51 Kg			

## 700 SERIES FLOOR STANDS BACK TO BACK



L&amp;S 3

Ref.	390706	Max. "	Max. Kg
Dimensions in mm	W 900 x D 600 x H 1821	65 + 65	80
Mounting interface	L&S 3		
Nett weight	42 Kg		
Load	80 kg symmetrical		

## 700 SERIES FLOOR STANDS

## 700 SERIES FLOOR STANDS EXTRA STABILITY



L&amp;S 5

**Ref.****390780**

Dimensions in mm

W 1255 x D 733 x H 1856

Mounting interface

L&amp;S 5

Nett weight

32 Kg



See page 25 for a floor stand up to 150 Kg.

See page 13 for the optional coverplate (390781) for finishing the wheel frame.



## 700 SERIES (TEMPORARILY) VIDEO WALL FLOOR STAND



L&amp;S 3

**Ref.****390725**

Dimensions in mm

W 900 x D 530 x H 2729

Mounting interface

L&amp;S 3

Nett weight

60 Kg

3 x



Connect multiple floor stands with the accessoire **390728** (set of 2) and create the perfect dividable video wall.



## 700 SERIES FLOOR MONITOR STANDS



L&amp;S 3

**Ref.****390722**

Dimensions in mm

W 900 x H 530 x D 486

Mounting interface

L&amp;S 3

Angle adjustment

30° up to 60°

Nett weight

27 Kg

**Ref.****390720**

Dimensions in mm

W 900 x D 530 x H 494

Mounting interface

L&amp;S 3

Angle adjustment

30° up to 60°

Nett weight

27 Kg



## 700 SERIES FLOOR MONITOR STANDS ON WHEELS



L&amp;S 3

**Ref.****390723**

Dimensions in mm

W 900 x D 530 x H 613

Mounting interface

L&amp;S 3

Angle adjustment

30° up to 60°

Nett weight

30 Kg

**Ref.****390721**

Dimensions in mm

W 900 x D 530 x H 621

Mounting interface

L&amp;S 3

Angle adjustment

30° up to 60°

Nett weight

30 Kg




700 SERIES FLOOR STANDS


700 SERIES FLOOR STANDS SINGLE COLUMN



Ref.	390770	FS-770V6
Dimensions in mm	W 900 x D 450 x H 1821	W 900 x D 450 x H 1821
Mounting interface	L&S 3	VESA 200, 400, 600
Nett weight	26 Kg	26 Kg



Ref.	390771	FS-771V6
Dimensions in mm	W 900 x D 450 x H 1829	W 900 x D 450 x H 1829
Mounting interface	L&S 3	VESA 200, 400, 600
Nett weight	32 Kg	32 Kg




700 SERIES FLOOR STANDS SINGLE COLUMN ON WHEELS



Ref.	390774	FS-774V6
Dimensions in mm	W 900 x D 530 x H 1804	W 900 x D 530 x H 1804
Mounting interface	L&S 3	VESA 200, 400, 600
Nett weight	29 Kg	29 Kg



Ref.	390775	FS-775V6
Dimensions in mm	W 900 x D 530 x H 1812	W 900 x D 530 x H 1812
Mounting interface	L&S 3	VESA 200, 400, 600
Nett weight	35 Kg	35 Kg



ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 43 FOR THE FULL PROGRAM)

See "Mounting brackets for flat panels" for the full program see page 43



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

AUDIO SOLUTIONS



For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" for more information page 3

## 700 SERIES FLOOR STANDS

## EQUIPMENT HOUSINGS FOR FLAT PANEL STANDS

**EC-1 + EC-1AC**

Housing for Mac Mini,  
universal media player,  
Barco clickshare mini

Mounting interface:  
L&S 5



**Ref.**  
Max. dimensions equipment in mm

**EC-1**  
W 200 x D 48 x H 200

**EC-1AC (incl. 3-way power strip F, CEE 7/4)**  
W 200 x D 48 x H 200

MOUNTING HEAD FOR **DOUBLE** COLUMN FLOOR STANDS

Excluding:  
numeric lock Ref. **230052**  
key lock Ref. **230045**



**Ref.**

**390711**

**390793**

EQUIPMENT CABINET FOR **DOUBLE** COLUMN STANDS

**Ref.**  
Max. dimensions equipment in mm

**EC-735**  
W 440 x D 380 x H 110

**EC-736**  
W 440 x D 380 x H 80

EQUIPMENT HOUSINGS FOR **DOUBLE** COLUMN STANDS

**390737**  
Compact and flat laptop /  
PC housing



**Ref.**  
Max. dimensions equipment in mm

**390737**  
W 400 x D 55 x H 350

LAPTOP/CAMERA SUPPORT FOR **DOUBLE** COLUMN STANDS

**Ref.**  
Max. dimensions equipment in mm

**390738**  
W 200 x D 250

**390715**  
W 300 x D 250

**390716**  
W 450 x D 350



## LAPTOP/CAMERA SUPPORT FOR **SINGLE** COLUMN STANDS



**Ref.**  
Max. dimensions equipment in mm




**390729**  
W 300 x D 250

**390731**  
W 450 x D 350



## EXTENSION COLUMN SET (ONLY SUITABLE FOR 390708) FOR **DOUBLE** COLUMN STANDS



**Ref.**  
Length in mm

Set of 2



**390732**  
900

## MANUAL PORTRAIT/LANDSCAPE ADAPTER FOR **DOUBLE** COLUMN STANDS



**Ref.**

Manual left and right rotation



"use in combination with UFPRO mounting brackets"

**P3496**



## VIDEO CONFERENCE MOUNTING HEAD FOR **DOUBLE** COLUMN STANDS



**Ref.**  
Maximum screen width in mm

**390768**  
720 - 1100



**390769**  
910 - 1510

More "Video conferencing solutions"  
check page 175

-2°/+2°



## VIDEO WALL CONNECTOR BAR, SET OF 2 FOR **DOUBLE** COLUMN STANDS



**Ref.**  
Length in mm



**390728**  
785-1330

More "Video wall solutions"  
check page 45



## 700 SERIES FLOOR STANDS

COVER PLATE (SUITABLE FOR 390780, PAGE 10) FOR **DOUBLE** COLUMN STANDS

"Soft edge finishing"  
ergonomic protection



Ref.

390781

## FLIGHTCASE FOR DIVIDABLE 700 SERIES FLOOR STANDS For more flightcase models visit our website



**Ref.**  
Suitable for  
**Ref.**  
Suitable for



**14842**  
1x 390701  
**16100**  
1x 390771

**16678**  
1x 390702  
**17125**  
1x 390725

**16705**  
1x 390707  
**17809**  
1x 390720

**15239**  
1x 390705  
**17086**  
1x 390721



**FCFS-4042W**  
390701  
and 40-42" screen

**FCFS-4650W**  
390701  
and 46-50" screen

**FCFS-5255W**  
390701  
and 52-55" screen

# 800 series

## Flat panel floor stands

### ***The 800 series Flat panel floor stands***


*The new 800 series floor stand redefines flexibility, quick installation and installer friendliness when it comes to floor stand solutions.*



**Audipack®**

*It's great to have solutions...*

# Audipack 800 series, designed to be **noticed**

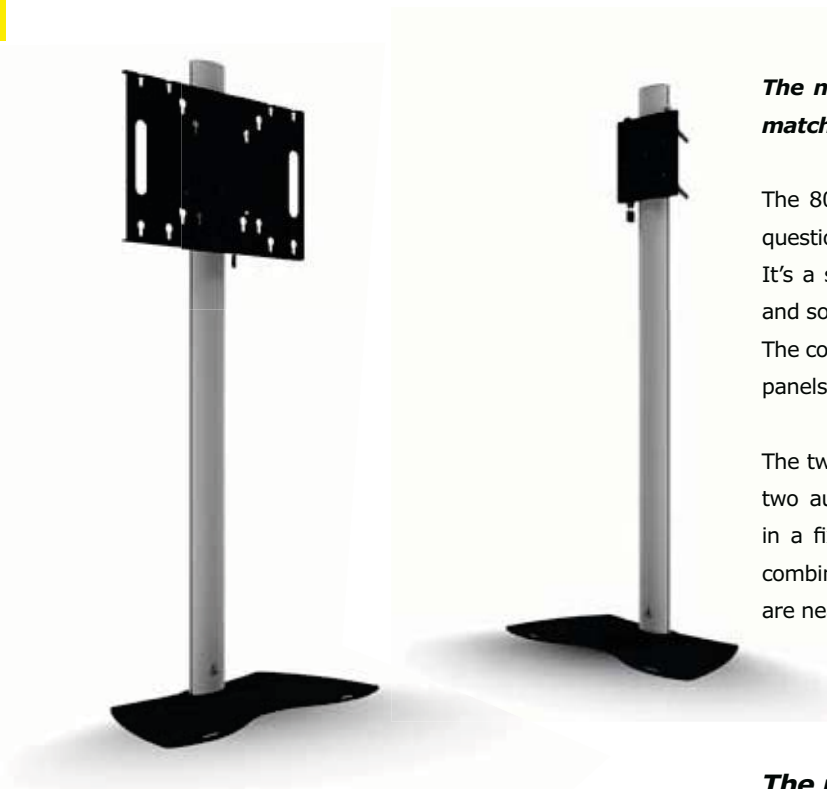

**The new 800 series floor stands are specially designed to match slim line flat panels.**

The 800 series free standing display is designed to cover today's questions.

It's a slim line well thought of floor stand offering lots of options and solutions.

The column shape is nicely balanced in size for current slim-line flat panels.

The two hidden cable channels in the column are reachable by the two automatic closing doors. The 800 series column is available in a fixed version and Quick-Release tool-less rental version. By combining the floor stand with an Audipack flightcase all components are neatly organized in the flightcase together with the screen.

## **The perfect rental combination.**

The 800 series quick release floor stands can be separated by hand and fitted into an Audipack flight case along with the flat panel. Available for any screen size.

Flightcases are available in different colours with optional logo prints. Please refer to our separate flightcase section on page 181 for more flightcase solutions.



- ▲ **Elegant column design**
- ▲ **Landscape or portrait positioning of the panel**
- ▲ **Two integrated cable channels**
- ▲ **Continuous height adjustment**
- ▲ **Integrated measuring ruler for precise positioning**
- ▲ **Standard models or custom built available**



Easy cable access



Available with  
scratch resistant coating



Flat panel position ruler



Quick release,  
perfect rental solution

800 SERIES FLOOR STANDS

800 SERIES FLOOR STANDS



Multi-Vesa



Multi-Vesa

Ref.	FS-800	FS-800V6	Max. °	Max. Kg
Dimensions in mm	W 900 x D 450 x H 1821	W 900 x D 450 x H 1821	55	60
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	19 Kg	19 Kg		

Ref.	FS-801 (BK*)	FS-801V6 (BK*)	Max. °	Max. Kg
Dimensions in mm	W 900 x D 450 x H 1829	W 900 x D 450 x H 1829	55	60
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	25 Kg	25 Kg		

Ref.	FS-804 (BK*)	FS-804V6 (BK*)	Max. °	Max. Kg
Dimensions in mm	W 900 x D 560 x H 2024	W 900 x D 560 x H 2024	65	60
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	32 Kg	32 Kg		

Ref.	FS-805 (BK*)	FS-805V6 (BK*)	Max. °	Max. Kg
Dimensions in mm	W 900 x D 560 x H 1829	W 900 x D 560 x H 1829	65	85
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	36 Kg	36 Kg		

\* Available with scratch resistant floorplate, for example: Ref.: **390801BK**

MOUNTING HEAD FOR 800 SERIES



Excluding:  
numeric lock Ref. **230052**  
key lock Ref. **230045**

Choose your interface.

The FS series is available with 2 different screen interfaces.

The L&S 5 is the Audipack's AV cross rental solution with a wide variety of installation options on the job. The Multi-Vesa solution is a very cost effective mounting interface based on the Vesa mounting pattern on the screen. With mounting cams the screen can easily be locked in the mounting head.



Mounting interface: L&S 5  
Bracket required see page 43



Mounting interface: Multi-Vesa



Ref.

390851

390855



## 800 SERIES FLOOR STANDS

## ACCESSORIES

## MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 43 FOR THE FULL PROGRAM)

See "Mounting brackets for flat panels" for the full program see page 43



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UPRO series



Brand related mounts



VESA mounts

## CAMERA SUPPORT FOR 800 SERIES



Ref.  
Max. dimensions equipment in mm



EC-831  
W 300 x D 250

More "Video conferencing solutions" check page 175



## LAPTOP SUPPORT FOR 800 SERIES



Ref.  
Max. dimensions equipment in mm



EC-815  
W 300 x D 250



EC-816  
W 450 x D 350



## EQUIPMENT HOLDERS

EC-835  
Laptop / DVD / PC cabinet

EC-1 + EC-1AC  
Housing for Mac Mini,  
universal media player,  
Barco clickshare mini

Mounting interface:  
L&S 5



EC-835  
W 440 x D 380 x H 110



EC-1  
W 200 x D 200 x H 48



EC-1AC (incl. 3-way power strip F, CEE 7/4)  
W 200 x D 200 x H 48



## AUDIO SOLUTIONS



For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" for more information page 3

# 900 series

## Flat panel floor stands

### ***The 900 series Flat panel floor stands***

*The Audipack 900 series is a range of supports and stands for flat panels offering stability combined with flexibility.*

*It's a concept that meets the functional, technical and aesthetic demands of today's professional presentations.*



**Audipack®**

*It's great to have solutions...*

# Audipack 900 series, designed to be **noticed**



**Combining style with strength, the Audipack 900 series flat panel floor stands are easy on the eye and easy to install.**

Calling on Audipack's many years of experience with display stands and accessories, the 900 series incorporates numerous clever features, such as an integrated height position ruler and access hatches for cabling.

As with many Audipack stands and brackets, the 900 series is equipped with the Lock&Secure quick mounting system. Once installed, the flat panel is locked firmly in place for safety and security.

Customised versions of the 900 series products are available on request.



## **The perfect rental combination.**

The 900 series quick release floor stands can be separated by hand and fitted into an Audipack flight case along with the flat panel. Available for any screen size.

Flight cases are available in different colours with optional logo prints. Please refer to our separate flight case section on page 181 for more flight case solutions.



- ▲ **Landscape or portrait positioning of the panel**
- ▲ **Integrated yet easily accessible cable channel**
- ▲ **Continuous height adjustment**
- ▲ **Integrated measuring ruler for precise positioning**
- ▲ **Quick locking system**




Easy cable access



Available with  
scratch resistant coating




Flat panel position ruler



Quick release,  
perfect rental solution

## 900 SERIES FLOOR STANDS



Mounting interface: L&amp;S 5



Mounting interface: Multi-Vesa

**Choose your interface.**

The FS series is available with 2 different screen interfaces.

The L&S 5 is the Audipack's AV cross rental solution with a wide variety of installation options on the job. The Multi-Vesa solution is a very cost effective mounting interface based on the Vesa mounting pattern on the screen. With mounting cams the screen can easily be locked in the mounting head.

**900 SERIES FLOOR STANDS**

L&amp;S 5



Multi-Vesa

<b>Ref.</b>	<b>390900</b>	<b>FS-900V6</b>		
Dimensions in mm	W 900 x D 450 x H 1821	W 900 x D 450 x H 1821	Max. °	Max. kg
Mounting interface	L&S 5	VESA 200, 400, 600	55	60
Nett weight	39 Kg	L&S 5 39 Kg		
<b>Ref.</b>	<b>390901 (BK*)</b>	<b>FS-901V6 (BK*)</b>		
Dimensions in mm	W 900 x D 450 x H 1829	W 900 x D 450 x H 1829	Max. °	Max. kg
Mounting interface	L&S 5	VESA 200, 400, 600	55	60
Nett weight	45 Kg	L&S 5 45 Kg		
<b>Ref.</b>	<b>390902 (BK*)</b>			
Dimensions in mm	W 900 x D 560 x H 2024		Max. °	Max. kg
Mounting interface	L&S 5		65	60
Nett weight	46 Kg			
<b>Ref.</b>	<b>390907 (BK*)</b>			
Dimensions in mm	W 900 x D 560 x H 1829		Max. °	Max. kg
Mounting interface	L&S 5		65	85
Nett weight	49 Kg			
<b>Ref.</b>	<b>390908</b>	<b>FS-908V6</b>		
Dimensions in mm	W 900 x D 560 x H 1821	W 900 x D 560 x H 1821	Max. °	Max. kg
Mounting interface	L&S 5	VESA 200, 400, 600	65	85
Nett weight	42 Kg	L&S 5 42 Kg		
<b>Ref.</b>	<b>390942 (BK*)</b>	<b>FS-942V6 (BK*)</b>		
Dimensions in mm	W 900 x D 700 x H 2024	W 900 x D 700 x H 2024	Max. °	Max. kg
Mounting interface	L&S 5	VESA 200, 400, 600	90	85
Nett weight	63 Kg	L&S 5 63 Kg		
'Wind load norm compliant'				
<b>Ref.</b>	<b>390943 (BK*)</b>			
Dimensions in mm	W 900 x D 700 x H 2025		Max. °	Max. kg
Mounting interface	L&S 5		90	85
Nett weight	55 Kg			
'Wind load norm compliant'				

\* Available with scratch resistant floorplate, for example: Ref.: **390901BK**




## 900 SERIES FLOOR STANDS

## 900 SERIES FLOOR STANDS ON WHEELS




L&amp;S 5

<b>Ref.</b>	<b>390904</b>
Dimensions in mm	W 900 x D 560 x H 1804
Mounting interface	L&S 5
Nett weight	40 Kg




<b>Ref.</b>	<b>390905</b>
Dimensions in mm	W 900 x D 560 x H 1812
Mounting interface	L&S 5
Nett weight	51 Kg




L&amp;S 5

Multi-Vesa

<b>Ref.</b>	<b>390974</b>	<b>FS-974V6</b>
Dimensions in mm	W 900 x D 560 x H 1804	W 900 x D 560 x H 1804
Mounting interface	L&S 5	VESA 200, 400, 600
Nett weight	45 Kg	45 Kg



<b>Ref.</b>	<b>390975</b>	<b>FS-975V6</b>
Dimensions in mm	W 900 x D 560 x H 1812	W 900 x D 560 x H 1812
Mounting interface	L&S 5	VESA 200, 400, 600
Nett weight	56 Kg	56 Kg



## 900 SERIES FLOOR MONITOR STANDS



L&amp;S 5

<b>Ref.</b>	<b>390922</b>
Dimensions in mm	W 900 x D 560 x H 466
Mounting interface	L&S 5
Angle adjustment	30° up to 60°
Nett weight	27 Kg



<b>Ref.</b>	<b>390920</b>
Dimensions in mm	W 900 x D 560 x H 466
Mounting interface	L&S 5
Angle adjustment	30° up to 60°
Nett weight	27 Kg



## 900 SERIES FLOOR MONITOR STANDS ON WHEELS



L&amp;S 5

<b>Ref.</b>	<b>390923</b>
Dimensions in mm	W 900 x D 560 x H 593
Mounting interface	L&S 5
Angle adjustment	30° up to 60°
Nett weight	30 Kg



<b>Ref.</b>	<b>390921</b>
Dimensions in mm	W 900 x D 560 x H 599
Mounting interface	L&S 5
Angle adjustment	30° up to 60°
Nett weight	30 Kg




900 SERIES FLOOR STANDS

## 900 SERIES (TEMPORARILY) VIDEO WALL FLOOR STAND



Ref.	390925
Dimensions in mm	W 900 x D 560 x H 2724
Mounting interface	L&S 5
Nett weight	60 Kg

3 x



Connect multiple floor stands with the accessoire **390928** (set of 2) and create the perfect dividable video wall.




## LARGE SCREEN FLOOR STAND

**NEW**



Ref.	FS-V600
Dimensions in mm	W x D x H
Max. presentation height in mm	1625 (centre screen)
Mounting interface	VESA 400 x 200, VESA 400 x 400, VESA 600 x 200 and VESA 600 x 400




▲ Continuous height adjustment

## LARGE SCREEN FLOOR STAND ON WHEELS



Ref.	FSW-V600
Dimensions in mm	W 1077 x D 733 x H 1995
Max. presentation height in mm	1625 (centre screen)
Mounting interface	VESA 400 x 200, VESA 400 x 400, VESA 600 x 200 and VESA 600 x 400



▲ Continuous height adjustment

## ACCESSORIES

### MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 43 FOR THE FULL PROGRAM)

See "Mounting brackets for flat panels" for the full program see page 43



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UPRO series



Brand related mounts



VESA mounts

## 900 SERIES FLOOR STANDS

## AUDIO SOLUTIONS



For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" page 3 for more information

## LAPTOP SUPPORT



**Ref.**  
Max. dimensions equipment in mm



**390915**  
W 300 x D 250

**390916**  
W 450 x D 350



## EQUIPMENT CABINET



**Ref.**  
Max. dimensions equipment in mm



**EC-935**  
W 440 x D 380 x H 110

**EC-936**  
W 440 x D 380 x H 80



## LAPTOP HOUSING



**Ref.**  
Max. dimensions equipment in mm



**390937**  
W 400 x D 350 x H 55



## EQUIPMENT HOUSINGS

**NEW**

Housing for Mac Mini,  
universal media player,  
Barco clickshare mini

Mounting interface:  
L&S 5



**Ref.**  
Max. dimensions equipment in mm

**EC-1**  
W 200 x D 48 x H 200

**EC-1AC** ((incl. 3-way power strip F, CEE 7/4)  
W 200 x D 48 x H 200

900 SERIES FLOOR STANDS

## CAMERA SUPPORT



**Ref.**  
Max. dimensions equipment in mm



**390931**  
W 200 x D 250

More "Video conferencing solutions"  
check page 175



## PORTRAIT/LANDSCAPE ADAPTER



**Ref.**

Manual left and right rotation



"use in combination with UFPRO mounting brackets"

**P3496**



## MOUNTING HEAD



**Ref.**

Excluding:  
numeric lock Ref.  
key lock Ref.

**230052**  
**230045**



**390951**



**390793**



## VIDEO CONFERENCE MOUNTING HEAD



**Ref.**  
Maximum screen width

More "Video conferencing solutions"  
check page 175



**390969**  
720 - 1100

**390970**  
910 - 1510

-2°/+2°



## VIDEO WALL CONNECTOR BAR, SET OF 2



**Ref.**  
Length in mm



**390928**  
785-1330

More "Video wall solutions"  
check page 45





## 900 SERIES FLOOR STANDS

## FLIGHTCASE FOR DIVIDABLE 900 SERIES FLOOR STANDS

							
<b>Ref.</b> Suitable for <b>Ref.</b> Suitable for	<b>14842</b> 1x 390901 <b>17511</b> 1x 390975	<b>17682</b> 1x 390902 <b>17905</b> 1x 390925	<b>18251</b> 1x 390907	<b>18294</b> 1x 390942	<b>FCFS-4042W</b> 390901 and 40-42" screen	<b>FCFS-4650W</b> 390901 and 46-50" screen	<b>FCFS-5255W</b> 390901 and 52-55" screen



Video wall 900 series, for more information see pag 25, ref. 390925

# ***1000 series***

## ***Flat panel floor stands***

### ***The 1000 series Flat panel floor stands***

*The most stylishly designed flat panel floor stand in the world.*



**Audipack®**

*It's great to have solutions...*

## 1000 SERIES FLOOR STANDS

# Just that extra little bit of class



***Ideal for your reception area or just for extra 'wow' during your presentation.***

The Audipack 1000 series flat panel floor stands for screens up to 90 inch.

The 1000 series stands out with its high finish level and class. The floor support comprises a high gloss black floor plate and a sturdy but stately rectangular column.

Combined with the Audipack flat panel monitor installation brackets, it offers a minimalistic look.

Available for 32-65" and 65-90" screen sizes.

*To install your flat panel to an Audipack product an additional flat panel bracket is needed.*

*See "Mounting brackets for flat panels" section on page 43 for an overview of the available brackets.*

- ▲ **High quality finishing**
- ▲ **Invisible cable management**
- ▲ **Portrait or landscape flat panel positioning**
- ▲ **Custom built models available**



Optional: EC-1 or EC-1AC (incl. 3-way power strip F, CEE 7/4) Equipment holder



Easy player access




Neatly finished back side

## 1000 SERIES FLOOR STANDS




L&S 5

Ref.	391000
Dimensions in mm	W 735 x D 470 x H 1840
Presentation height in mm (centre screen)	1550, 1600 or 1650
Mounting interface	L&S 5
Max. equipment in mm	W 145 x D 60 x H 250
Nett weight	39 Kg



Ref.	391001
Dimensions in mm	W 800 x D 560 x H 1840
Presentation height in mm (centre screen)	1550, 1600 or 1650
Mounting interface	L&S 5
Max. equipment in mm	W 145 x D 60 x H 250
Nett weight	45 Kg



# ***Height adjustable floor stands***

## **Height adjustable floor stands**

*The all-in-one solution for transporting and lifting your larger flat panels up to 120 Kg.*





# Automatically raise your large screen

## out of the flightcase

### The perfect rental solution for large and heavy screens

These dividable floor stands create a compact system that can be easily transported together with a flat panel, all in one flight case.

The simple to assemble parts create a rigid and pleasing floor stand that lifts the flat panel effortlessly out of the flight case and raises it up to the presentation position – all automatically. Ideal for large and heavy screens, including touch screens.



- ▲ Suitable for screens up to 120 Kg.
- ▲ Flexible height adjustment
- ▲ Rigid construction
- ▲ No tools needed



FS-QR120E



Mounting interface: VESA 400x200, 400x400, 600x200, 600x400 and L&S5 + Multi-VESA

FS-QR120E



Lockable VESA mounting patterns


390966




Manual version available

## HEIGHT ADJUSTABLE FLOOR STANDS

## ELECTRIC HEIGHT ADJUSTABLE FLOOR STAND

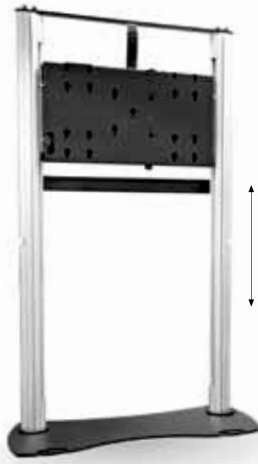

Ref.	FS-QR120E
Dimensions in mm	W 1130 x D 560 x H 2198
Presentation height in mm	700-1800 (centre screen)
Mounting interface	VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400 and L&S 5
Optional	Flightcase



Lift any screen up to 120 Kg out of the flightcase!



The **FS-QR120E** is used in combination with a separate available Audipack flightcase. For each available screen size Audipack has created a flightcase that contains the **FS-QR120E** and the flat panel.

Please contact Audipack for an updated flightcase product list.


Build-up the FS-QR120E (all parts are in the flightcase)

Turn the flightcase around and connect the screen to the FS-QR120E mounting head


Move the flightcase and electrically lift your screen to presentation height straight out the flightcase without personal lifting.



## MANUAL HEIGHT ADJUSTABLE FLOOR STAND - 900 SERIES STACK-LIFT

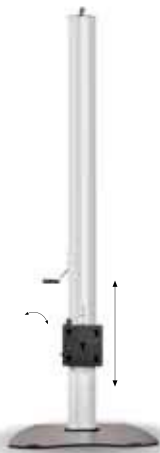


Ref.	390966
Dimensions in mm	W 900 x D 662 x H 2770
Presentation height in mm	2450 (centre screen)
Mounting interface	L&S 5
Optional	Flightcase



Lift any screen up to 60 Kg out of the flightcase!

Ref.	390968
Dimensions in mm	W 900 x D 700 x H 2000
Presentation height in mm	1700 (centre screen)
Mounting interface	L&S 5
Optional	Flightcase

**NEW**



Lift any screen up to 60 Kg out of the flightcase!



The **390966** and **390968** are used in combination with a separate available Audipack flightcase. For each available screen size Audipack has created a flightcase that contains the **stack-lift** and **flat panel**.

The flightcase is available in various colours.

Please contact Audipack for an updated flightcase product list.

Look for build-up instructions on the next page.

## HEIGHT ADJUSTABLE FLOOR STANDS

**ACCESSORIES****MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 43 FOR THE FULL PROGRAM)**

See "Mounting brackets for flat panels" for the full program see page 43



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

**MOUNTING CAMS FOR DIRECT VESA MOUNTING****RECESSED MOUNTING HOLES**

Ref.

392618  
M6 x 13392318  
M8 x 13390618  
M10 x 13392621  
M6 x 35392620  
M8 x 35**LAPTOP SUPPORTS**

Ref.  
Max. equipment dimensions in mm

Suitable for 390966

390915  
W 300 x D 250390916  
W 450 x D 350

Suitable for FS-QR120E

P5355  
W 450 x D 365**FLIGHTCASES****Build-up instructions Stack-Lift**

Build-up the Stack-Lift (all parts are in the flightcase)  
Turn the flightcase around and connect the screen to the Stack-Lift mounting head  
Move the flightcase and manually lift your screen to presentation height straight out the flightcase without personal lifting.



Size  
Available for floor stand:

55"  
390966 / FS-QR120E65"  
FS-QR120E85"  
FS-QR120E90"  
FS-QR120E

# ***All-in-one Trolley***

***for Flat panels***

***The FSW-Atlas presentation trolley***

*is an all-in-one presentation trolley equipped with integrated audio, data, video connections and power sockets.*



**Audipack®**

*It's great to have solutions...*

# Total solution in one

NEW

## Presentation trolley



- ▲ Lockable wheels
- ▲ Easy equipment installation
- ▲ Powercon power, HDMI and VGA in wheelframe
- ▲ Integrated 3-fold power strip F, CEE 7/4
- ▲ Portrait or landscape flat panel positioning
- ▲ Integrated Audio elements

**The easiest way to set up your mobile presentation.**

The Audipack FSW-Atlas trolley is an all-in-one trolley with invisible integrated audio in the column.

In addition, there's also a 3-fold power strip integrated for connecting the monitor and optional equipment.

In the wheel frame of the trolley you will find a PowerCON power connection, RJ45, HDMI and space for extra connections.

With a Lock & Secure 5 mounting bracket, the screen is easily installed. The screen height is adjustable in several different positions.

For installing additional equipment such as mini pc's and wireless presentation equipment, Audipack provides several brackets, even with integrated power distribution.

To install your flat panel to the Audipack FSW-Atlas an additional flat panel bracket is needed.

See "Mounting brackets for flat panels" section on page 43 for an overview of the available brackets.



Built-in speakers



Integrated 3-fold power strip to easily connect equipment



Source and various connections in wheel frame



Optional equipment holder EC-1 or EC-1AC (incl. 3-fold power strip F, CEE 7/4)



Optional 100 Volt Travo Ref. 491019

### ALL-IN-ONE TROLLEY




L&S 5

#### Ref.

#### FSW-ATLAS

Dimensions in mm	W 976 x D x 685 x H x 1960
Presentation height in mm (centre screen)	1480 - 1590 mm
Mounting interface	L&S 5
Nett weight	31 Kg
Max power	2 x 30 Watt at 8 Ohm
Frequency	70 Hz - 20 KHz





# ***Presentation Trolleys***

## ***for Flat panels***

***The height adjustable trolleys,***

*allow you to use touch screens in a more flexible way.*

*Just push a button to change the working height.*

*Ideal for schools or rooms with varying users.*



**Audipack®**

*It's great to have solutions...*

# Plug & Play height adjustable trolleys



- ▲ Lockable wheels
- ▲ Easy equipment installation
- ▲ Durable, well designed and slim constructions
- ▲ Safe and secure

**Height adjustable trolleys, designed for flat panels and touch screens.**

Flexible, durable and rigidly constructed these trolleys are an ideal solution for the education market.

Fit any (touch)screen to the trolley and with the optional Audipack audio solutions the total set-up is clean and well finished.

Audipack designs and manufactures in privately owned design studios and factories, so we can customise the system to suit individual customer's needs. We use our own durable materials that are easy to clean and highly scratch resistant.



## ELECTRIC HEIGHT ADJUSTABLE DOUBLE COLUMN TROLLEY



### Ref.

### DFS-120E

Dimensions in mm	W 1400 x D 797 x H 1950
Nett weight in Kg	53
Presentation height in mm	700-1580 (centre screen)
Mounting interface	VESA 400x200, 400x400, 600x200, 600x400 and L&S5
Power supply	230 VAC 50-60 Hz



Mounting interface: VESA 400x200, 400x400, 600x200, 600x400 and L&S5



Lockable VESA mounting patterns




Electric control panel

## PRESENTATION TROLLEYS FOR FLAT PANELS


## ELECTRIC HEIGHT ADJUSTABLE TROLLEY



Ref.	FSW-T100V6
Dimensions in mm	W 739 x D 650 x H 1175-1835
Presentation height in mm	940-1600 (centre screen)
Max. screen size in mm	height 1520
Mounting interface	VESA 200, 300, 400, 600 and L&S 5
Power supply	230 VAC 50-60 Hz




Ref.	FSW-T100V8
Dimensions in mm	W 939 x D 650 x H 1175-1835
Presentation height in mm	940-1600 (centre screen)
Max. screen size in mm	height 1520
Mounting interface	VESA 200, 300, 400, 600, 800 and L&S 5
Power supply	230 VAC 50-60 Hz




## ENTRY LEVEL TROLLEY



Ref.	FSW-T150V6
Dimensions in mm	W 739 x D 650 x H 1175-1835
Presentation height in mm	940-1600 (centre screen)
Max. screen size in mm	height 1520
Mounting interface	VESA 200, 300, 400, 600 and L&S 5
Power supply	230 VAC 50-60 Hz



Ref.	FSW-T150V8
Dimensions in mm	W 939 x D 650 x H 1175-1835
Presentation height in mm	940-1600 (centre screen)
Max. screen size in mm	height 1520
Mounting interface	VESA 200, 300, 400, 600, 800 and L&S 5
Power supply	230 VAC 50-60 Hz




## ELECTRIC HEIGHT ADJUSTABLE TOUCH TABLE



Ref.	FSW-Touch4055	FSW-Touch4055R	FSW-Touch6065
Dimensions in mm	W 949 x D 768 x H 760-1435	W 949 x D 768 x H 760-1435	W 1106 x D 768 x H 968-1643
Nett stroke in mm	675	675	675
Presentation height in mm	1418	1418	1418
Max. mounting range in mm	W 670 x H 446	W 670 x H 446	W 810 x H 671
Angle adjustment in degrees	-5 - 95	-5 - 95 <b>Electric</b>	-5 - 95

## VIDEO WALL FURNITURE TROLLEY

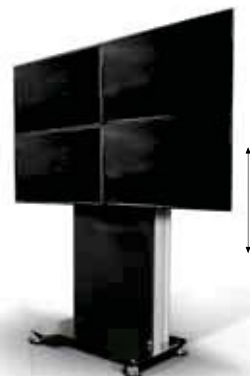

Ref.	FSW-VW2x2
Dimensions in mm	W 2012 x D 600
Presentation height (centre screens)	1290 - 1480 mm, manual
Mounting interface	VESA & universal

2x2



Ref.	FSW-VW2x2E (Electric)
Dimensions in mm	W 2012 x D 600
Presentation height (centre screens)	1300-1750 mm, electric
Mounting interface	VESA & universal
Connectivity	built-in switch

2x2



## PRESENTATION TROLLEYS FOR FLAT PANELS

## ACCESSORIES

## MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 43 FOR THE FULL PROGRAM)

See "Mounting brackets for flat panels" for the full program see page 43



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

## AUDIO SOLUTIONS



For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" page 3 or more information

## MOUNTING CAMS FOR DIRECT VESA MOUNTING

## FOR RECESSED MOUNTING HOLES



Ref.

392618  
M6x13392318  
M8x13390618  
M10x13392621  
M6x35392620  
M8x35

## LAPTOP SUPPORT (SUITABLE FOR DFS-120E)

Ref.  
Max. equipment dimensions in mmP5355  
W 450 x D 365

## COVER PLATE (SUITABLE FOR DFS-120E)



Ref.

"Soft edge finishing"  
ergonomic protection



DFS-CP

## PC CABINET (SUITABLE FOR FSW-T100 AND FSW-TOUCH)

Ref.  
Max. equipment dimensions in mmEC-7  
W 180 x D 514 x H 390

## PEN TRAY (SUITABLE FOR FSW-T100)



Ref.



FSW-PT1





# ***Table stands and mounts***

## ***for Flat panels***

***The Audipack flat panel table stands,***

*highly flexible solutions for screens up to 50"*



**Audipack®**

*It's great to have solutions...*



# Free standing and low profile solution



*The universal flat panel table stand is a solid, low profile, and freestanding presentation solution for flat panels up to 50 inch diagonal.*

The discreet design of the product compliments any flat panel perfectly. These stands come equipped with the Lock&Secure mounting system.


*To install your flat panel to an Audipack product, an additional flat panel bracket is needed.*

*See the 'Mounting brackets for flat panels' section on page 43 for an overview of the available brackets.*

- ▲ **Easy installation**
- ▲ **Discreet design**
- ▲ **2 height positions**
- ▲ **Rigid construction**
- ▲ **Vertical height adjustment**



The L&S 3 interface fits all Audipack mounting brackets



Easy mounting solution

## TABLE STANDS AND MOUNTS



### **Ref. 390660**

Dimensions in mm W 490 x D 265 x H 539  
Mounting interface L&S 3  
Max. screen height ca. 700 mm

Max. " 50



### **Ref. 392551**

Dimensions in mm W 490 x D 265 x H 590  
Mounting interface L&S 3  
Max. screen height ca. 800 mm

Max. " 50



### **Ref. FTS-V200**

Mounting interface VESA 100, 200  
Max. screen height 375 mm

Max. " 24



### **Ref. DMV-0500**

Length in mm 500  
Mounting interface VESA 75 x 100




Max. " 10



# Mount any **brand** and **type** of flat panel

**Mount any brand or type of flat panel to any Audipack system.**

*This universal mounting system allows you to fix any brand or type of flat panel to any Audipack system, with the Audipack L&S 3 and 5 feature. Both L&S 3 and 5 interfaces are fully compatible with each other, allowing panels to be interchanged for any application including rental or permanent installations.*



**Audipack®**

*It's great to have solutions...*

## MOUNTING BRACKETS FOR FLAT PANELS

## UNIPLATFIX PRO (UNIVERSAL FLAT PANEL BRACKETS)



Lock the bracket with the optional lock  
Ref.: **230052**(numeric), **230045**(key)

Ref.  
Dimensions in mm  
Max. mounting range in mm  
Min. mounting range in mm



**UFPRO-0500**  
W 516 x D 32 x H 382  
W 470 x H 360  
W 125

**UFPRO-0700**  
W 716 x D 32 x H 502  
W 670 x H 446  
W 125

**UFPRO-0800**  
W 860 x D 32 x H 502  
W 810 x H 446  
W 130



**UFPRO-0801**  
W 860 x D 39 x H 727  
W 810 x H 671  
W 120

**UFPRO-0900**  
W 960 x D 39 x H 727  
W 900 x H 671  
W 120



## MOUNTING CAMS FOR DIRECT VESA MOUNTING

## FOR RECESSED MOUNTING HOLES



Ref.

**392618**  
M6x13

**392318**  
M8x13

**390618**  
M10x13



**392621**  
M6x35

**392620**  
M8x35

## ULTRA SLIM LED MOUNT MULTI-VESA

An Ultra slim LED mount with a multi VESA mounting pattern.  
Special made for the ultra thin LED screens.



**UFPRO-V400**  
100, 200, 300 & 400  
100, 200, 300 & 400



**390814**  
75, 100 & 200  
75, 100 & 200



## DIRECT COLUMN MOUNTS MULTI-VESA



Ref.  
Type  
Vesa width  
Vesa height

**390793**  
700 serie  
200, 300, 400, 600  
200, 300, 400



**390855**  
800 serie  
200, 400, 400, 600  
200, 300, 400

**390955**  
900 serie  
200, 400, 400, 600  
200, 300, 400

## VESA FLAT PANEL BRACKETS

Available in different VESA sizes  
to match any flat panel with VESA  
mounting pattern.



Ref.  
VESA width  
VESA height  
Screw diameter

**390831**  
600  
200  
M6

**392565**  
300  
200  
M6

**392579**  
300  
300  
M6

**390845**  
400  
400  
M6, M8

**392541**  
600  
400  
M6

**390689**  
800  
400  
M6


**392561**  
800  
400  
M8

# ***Video wall and Multi screen solutions***

***Create a video wall in any configuration...***

*The Audipack video wall mounting system is the most solid and adjustable system on the market.*

*Save time and money on the installation.*

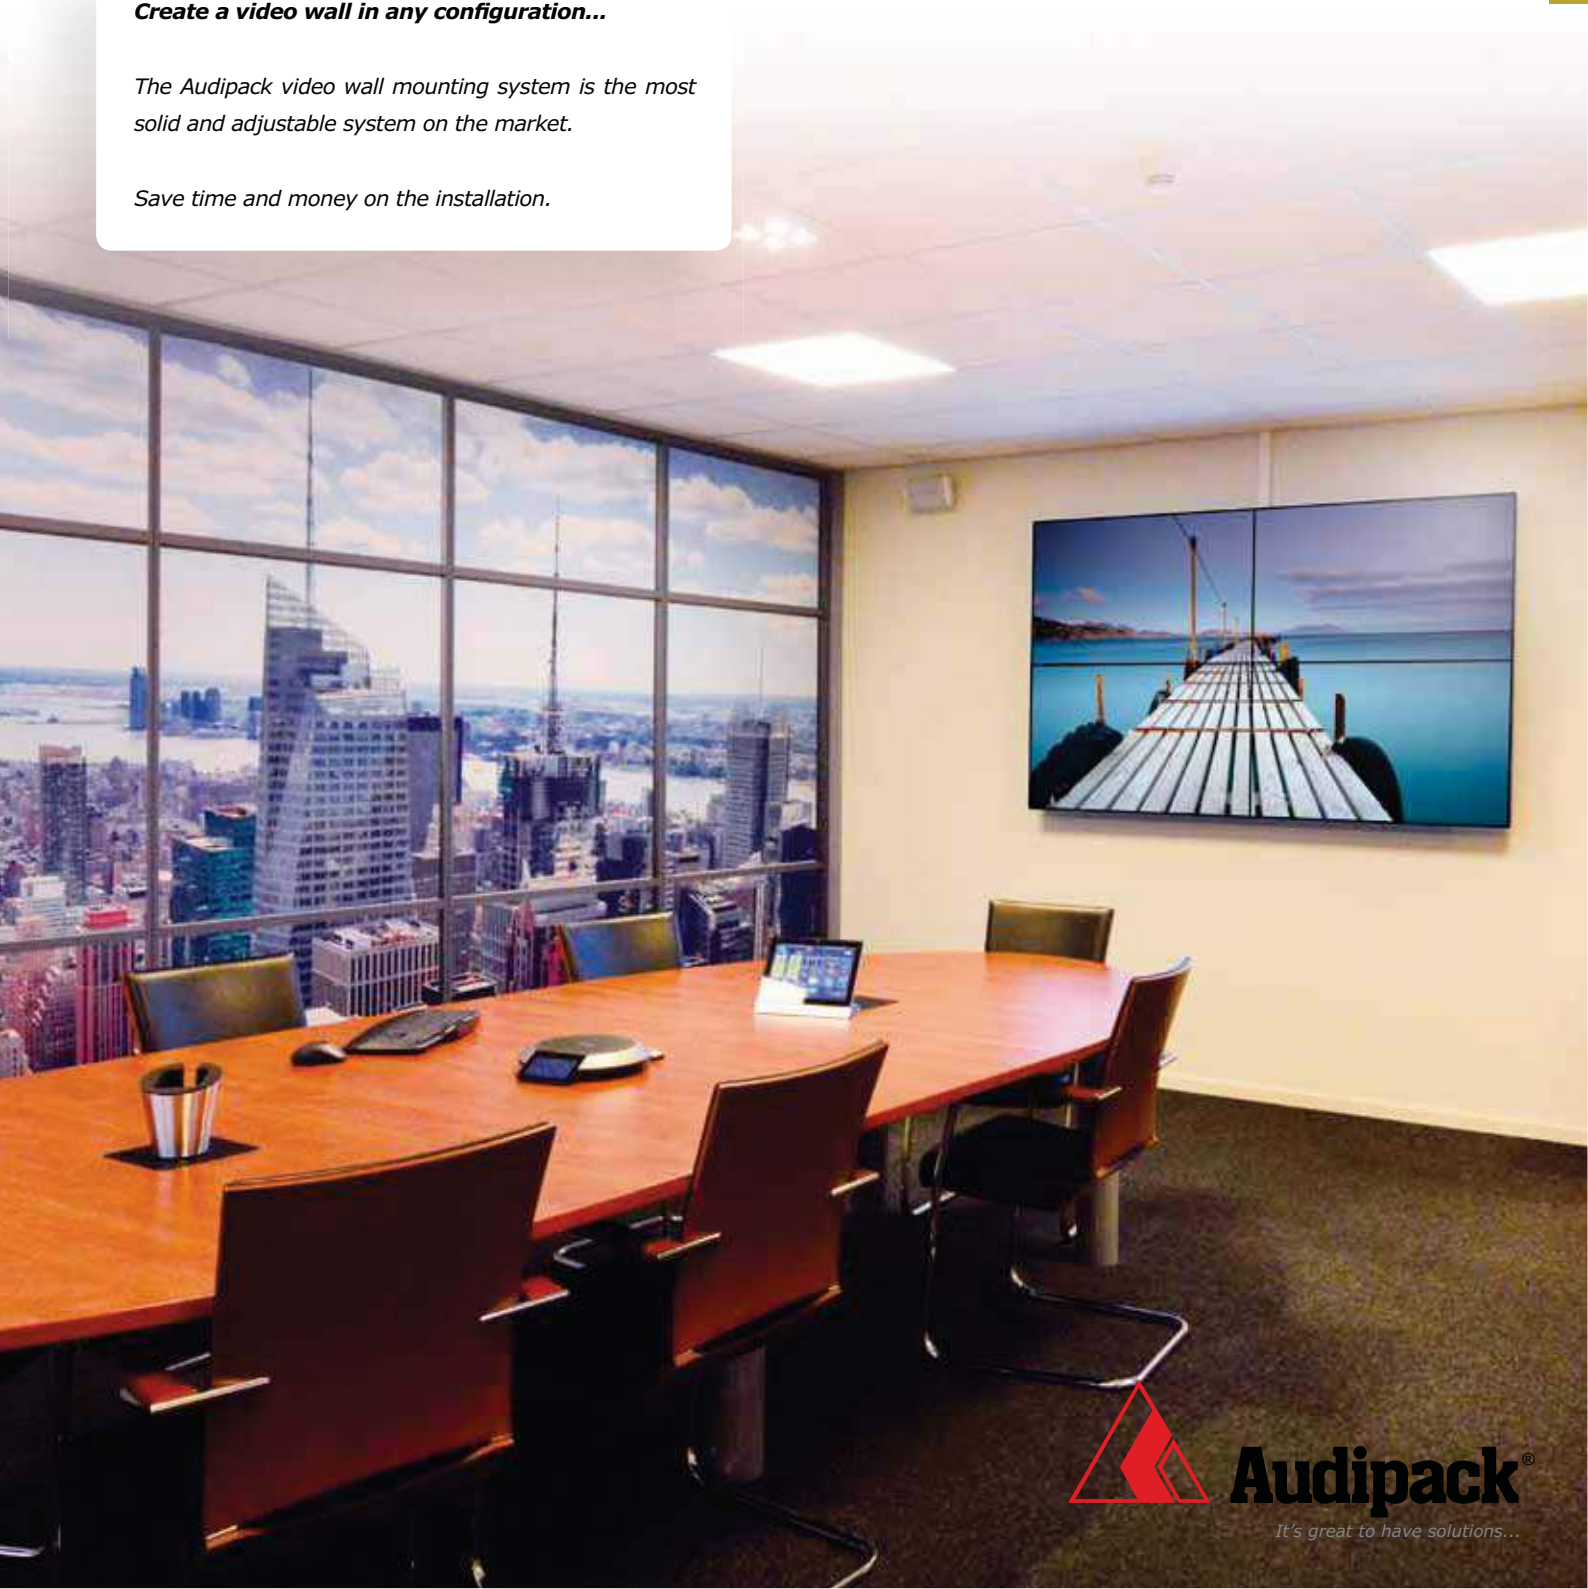

**Audipack®**

*It's great to have solutions...*



Create a **video wall** in any configuration

in next to **no time!**




**Installing video walls with Audipack's installation systems saves time and money.**

The universal **VWM basic system** is a low cost, high value installation system that gives fast and precise installation.

The construction looks simple, but meets more than the eye can see. Each screen is separately adjustable when it is installed to the wall or rental flying frame.

The system copes easily with 2x2, 4x4 or even 8x4 configurations. With a simple addition of our screen installation cams, the screens are installed in an instant.

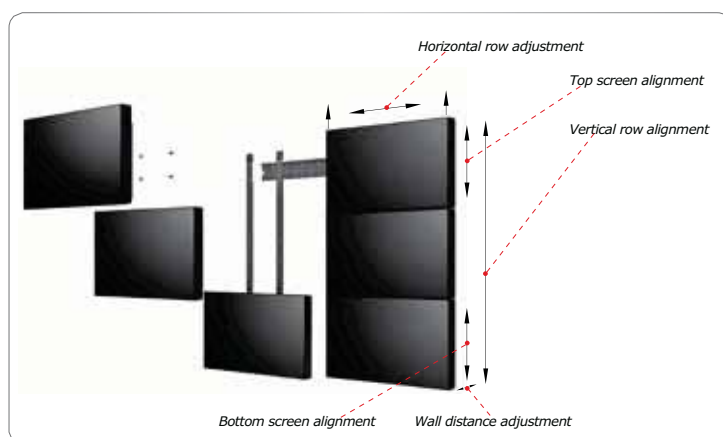

**Less effort for screen alignment perfection**



Upper screen position and complete row height adjustment




Lower screen position & offset adjustment



Perfect corner to corner screen adjustment



## COMPONENT SELECTION

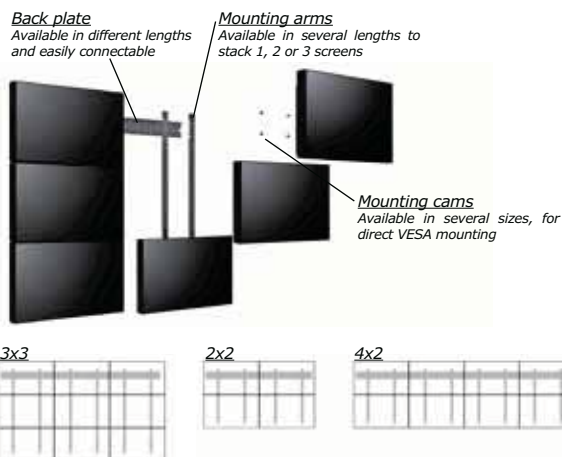

**For defining the needed components use the below listed product configuration:**


- 1 - Select screen diagonal, check screen height
- 2 - Choose max. width of total amount of screens and determine amount of back plates
- 3 - Select the MA arms by choosing vertical amount of screens
- 4 - Select mounting for screen installation

### Ordering example:


3x3 videowall configuration  
46" monitor, dimensions 1010 x 590 mm  
Mounting interface VESA 400, M8 (recessed mounting holes!)

### Product selections:

3 x VWM-BPH1000  
3 x MA-3-46  
36 x 392620



## BACK PLATES (BASIC SYSTEM)



<b>Ref.</b>	<b>VWM-BPH-0800</b>
Length in mm	800
<b>Ref.</b>	<b>VWM-BPH-1000</b>
Length in mm	1000

## MOUNTING ARMS

Single screens

Double vertical screen

Triple vertical screen

Single vertical row  
Video wallDouble vertical row  
Video wallTriple vertical row  
Video wall

**Screen size constantly change, visit our website for updated models and screen sizes.**

\* For screens with non centric placed VESA pattern (Samsung UE46A, Philips BDL 4675XU)

Max. " 46	<b>Ref.</b>	<b>MA-400</b>	<b>MA-2-46AS *</b>	<b>MA-3-46AS *</b>
	Max. screen size		H 576-593	H 576-593
	Vertical VESA	200, 400	400	400
Max. " 46	<b>Ref.</b>	<b>MA-300</b>	<b>MA-2-46-V3</b>	<b>MA-3-46-V3</b>
	Max. screen size		H 578-608	H 578-608
	Vertical VESA	300	300	300
Max. " 55	<b>Ref.</b>	<b>MA-400</b>	<b>MA-2-55</b>	<b>MA-3-55</b>
	Max. screen size		H 684-714	H 684-714
	Vertical VESA	200, 400	400	400
Max. " 60	<b>Ref.</b>	<b>MA-400</b>	<b>MA-2-60</b>	<b>MA-3-60</b>
	Max. screen size		H 754-784	H 754-784
	Vertical VESA	200, 400	400	400
Max. " 46	<b>Ref.</b>	<b>MA-600</b>	<b>MA-2-46P</b>	
	Max. screen size			H 1024-1084
	Vertical VESA		400, 600	200, 400, 600
Max. " 55	<b>Ref.</b>	<b>MA-600</b>	<b>MA-2-55P</b>	
	Max. screen size			H 1215-1275
	Vertical VESA		400, 600	200, 400, 600

Portrait

Portrait

## VIDEO WALL SYSTEMS AND MULTI SCREEN SOLUTIONS

## VIDEO WALL RENTAL SOLUTION



The rental video wall set is the ideal solution for the installation of video walls for temporary use. With this special rental set, it is possible to choose instantly between a free-standing or wall-mounted set-up, or a system that is suspended from trusses by cables.

The set is available in two versions: a set with a fixed-size video wall frame for just 1 type of screen configuration, or a flexible, adjustable set for various screen configurations. The last-mentioned version can be stored in Audipack rental flightcases.

With great speed, accuracy and safety, and with only a minimum of tools, the sets can be assembled on-site. By using the quick-installation basic VVM mounting solution the screens can be installed, aligned and adjusted quickly and accurately.


**Set configuration:**

- Rear subframe
- MA mounting arms
- Truss suspension arms
- Floor stands
- Flightcases for frames, floor stands and screens

*The possibilities are unlimited; please contact sales for more additional information.*




## GETINSPIRED

**Custom made Video wall solutions**

Wall mounted 2x2 video wall



Floor to ceiling mounted 3x3 Video wall

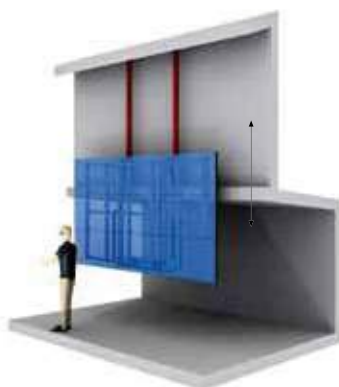

3x3 Video wall on lift system



3x3 / 2x3 Video wall trolley lift system

# Create a **video wall** in any configuration in next to **no time!**

**Installing video walls with Audipack's installation systems saves time and money.**

The **VWMS serviceable system** is an impressive product that supports the installation of multiple screens on a wall whilst allowing individual screen access for servicing needs.

Each screen in the videowall can be pulled out from the wall for service or repair. Simply push the screen back in when complete. The built-in adjustment feature means perfect alignment, even on a non-level wall.

The system copes easily with 2x2, 4x4 or even larger configurations. With a simple addition of our screen installation cams, the screens are installed in an instant.



- ▲ **Short installation time due to "row installing"**
- ▲ **Easy flat panel access**
- ▲ **Compact offset dimensions (only) 80 mm**
- ▲ **Integrated 3D flat panel adjustment**
- ▲ **Perfect screen alignment**
- ▲ **Standard L&S5 and VESA 200, 300 & 400 installation interface**



Single screen access



3D adjustment per installed screen



Rigid pantograph guidance & linear screen adjustment


## SERVICABLE VIDEO WALL SYSTEM

### Back plate

Available in different heights  
to stack 2 or 3 screens

### Mounting head

Available in an electric and a manual  
activated version

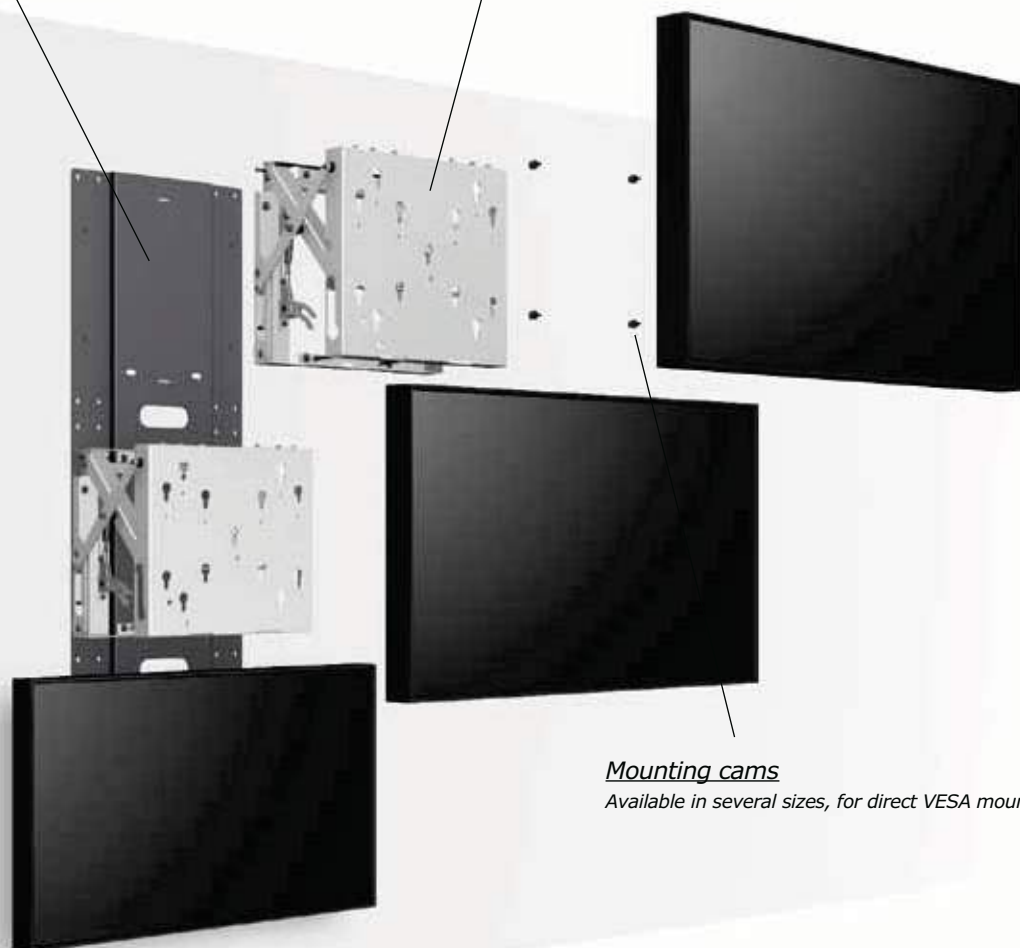

### Mounting cams

Available in several sizes, for direct VESA mounting

A perfect aligned videowall, installed in a perfect time and all screens are serviceable. Those are the key elements of the VWMS videowall system.

A system that installs with low effort featuring lots of alignment options, even when the wall is not finished well or is not perfectly level. The build-in 3D adjustment features deals with it all.

Simply install the vertical back plates to the wall and click the mounting heads to the plates; align and continue...

### **Ordering example:**

3x3 videowall configuration

46" monitor, dimensions 1010 x 590 mm


Mounting interface VESA 400 x 200, M8

### **Use:**

3 x VWM-BP3

9 x VWM


36 x 392318

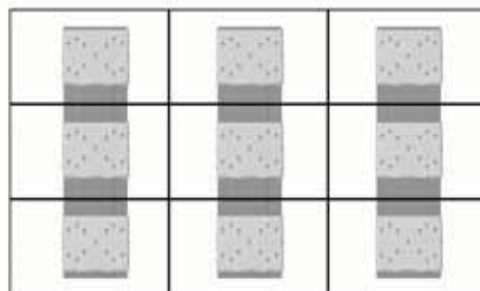

2x2



3x3



4x2




If your screen is not supplied with a VESA mounting pattern you need an Audipack mounting bracket to connect your screen onto the mounting heads.

**MOUNTING HEADS (EASY ACCESS MODEL)****Ref.****VWM-MH1**

Dimensions in mm	W 567 x D 80 - 300 x H 452
Min. wall offset in mm	80 (excl. UFPRO mount)
Max. wall offset in mm	260 (excl. UFPRO mount)
Nett weight in Kg	16
Linear activation	Manual, spring activated
Mounting interface	VESA 400 x 200, 200 x 200, 300 x 300, L&S 5

**Ref.****VWM-MH1E Electric activated**

Dimensions in mm	W 567 x D 80 - 300 x H 452
Min. wall offset in mm	80 (excl. UFPRO mount)
Max. wall offset in mm	260 (excl. UFPRO mount)
Nett weight in Kg	16
Linear activation	Full electric activated
Mounting interface	VESA 400 x 200, 200 x 200, 300 x 300, L&S 5
Connectivity	contact relay, optional wall switch <b>261318</b>

**BACK PLATES (EASY ACCESS MODEL)****Ref.****VWM-BP2**

Number of stacked screens	2
---------------------------	---

**Ref.****VWM-BP3**

Number of stacked screens	3
---------------------------	---





## ACCESSORIES

### MOUNTING CAMS FOR DIRECT VESA MOUNTING

### RECESSED MOUNTING HOLES



Ref.

**392618**  
M6 x 13

**392318**  
M8 x 13

**390618**  
M10 x 13

**392621**  
M6 x 35

**392620**  
M8 x 35

### UNIFLATFIX PRO (UNIVERSAL FLAT PANEL BRACKETS)



Lock the bracket with the optional lock  
Ref.: 230052



**Ref.**  
Dimensions in mm  
Max. mounting range in mm  
Min. mounting range in mm

**UFPRO-0500**  
W 516 x D 32 x H 382  
W 470 x H 360  
W 125

**UFPRO-0700**  
W 716 x D 32 x H 502  
W 670 x H 446  
W 125

**UFPRO-0800**  
W 860 x D 32 x H 502  
W 810 x H 446  
W 130

**UFPRO-0801**  
W 860 x D 39 x H 727  
W 810 x H 671  
W 120

### VWM-GRIP (ONLY SUITABLE FOR THE MANUAL VWM-MH1)



**Ref.**  
Suitable for



**VWM-grip**  
VWM-MH1

### AUDIO SOLUTIONS



For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" page 3 for more information

# ***Wall mount solutions***

## ***for flat panels***

***The Audipack wall mounts,***

*are a range of products that offer perfect solutions for Pro AV use or permanent installations.*



**Audipack®**

*It's great to have solutions...*

# Flexible, strong and Innovative!



The **Professional temporarily AV wall mounts** are specifically designed for professional installations. The special Lock&Secure mounting interfaces guarantees a quick installation and panel switch if required. Especially suitable for projects, public places, convention centres etc. To install your flat panel to an Audipack ProAV wall mount an additional flat panel bracket is needed.

- ▲ **Fast and easy installation**
- ▲ **Quick flat panel installation and removal**
- ▲ **Theft delay**
- ▲ **Very rigid design**



Thin wall mounts



Angle adjustment



Screw cup detail®



Flexible mounting range



(registered product)

A wide range of VESA and universal mounts is available. All our flat panels wall mounts are safe and easy to install and are available for flat panels up to 120 inch diagonal.

The professional wall mounts on the next pages are combined with L&S3 or L&S5 monitor brackets.

See the 'Mounting brackets for flat panels' section on page 43 for an overview of the available brackets.



**WALL MOUNTS PROFESSIONAL TEMPORARY INSTALLATION**

**THIN WALL MOUNTS WITH L&S 3**



**Ref.**

Dimensions in mm W 320 x D 18 x H 198  
Mounting pattern L&S 3



**THIN WALL MOUNTS L&S 5**



**Ref.**

Dimensions in mm W 340 x D 18 x H 286  
Mounting pattern L&S 5



**TILTABLE WALL MOUNTS WITH L&S 3 & 5**



**Ref.**

Dimensions in mm W 359 x D 41 x H 260  
Mounting pattern L&S 3  
Tilt adjustment in degrees -10 / 0 / +10  
Optional lock numeric:230052 / Key:230045

**390652**



**Ref.**

Dimensions in mm W 305 x D 75 x H 400  
Mounting pattern L&S 5  
Tilt adjustment in degrees -10 / 0 / +10  
Optional lock numeric:230052 / Key:230045

**392652**



**TILTABLE IN STEPS WALL MOUNTS WITH L&S 3**



**Ref.**

Dimensions in mm W 350 x D 50 x H 200  
Tilt adjustment in degrees -5 / +15 in 5° steps  
Mounting pattern L&S 3  
Optional lock numeric:230052 / Key:230045

**390585**



**Ref.**

Dimensions in mm W 362 x D 64 x H 208  
Tilt adjustment in degrees -5 / +15 in 5° steps  
Mounting pattern L&S 3  
Optional lock numeric:230052 / Key:230045

**390617**



**WALL MOUNTS PERMANENT INSTALLATION**

**VESA 75 & 100 WALL MOUNTS**



**Ref.**

Dimensions in mm W 120 x D 22 x H 122  
VESA 75 & 100

**390838**



**Ref.**

Dimensions in mm W 120 x D 22 x H 162  
VESA 75 & 100  
Tilt adjustment in degrees +5

**390839**



**Ref.**

Dimensions in mm W 269 x D 28 x H 250  
VESA 75, 100 & 200

**390840**



**2-POINT WALL MOUNT**



**Ref.**

Dimensions in mm W 400 x D 21 x H 530  
Max. mounting range in mm W 400

**FWM-V402**

**FWM-V600**



## WALL MOUNTS PERMANENT INSTALLATION

## THIN INSTALL WALL MOUNTS



For Ultra thin  
LED screens



<b>Ref.</b>	<b>FWM-V200</b>
Dimensions in mm	W 320 x D 12 x H 260
VESA width	75, 100 & 200
VESA height	75, 100 & 200

Including flat panel installation materials

## THIN INSTALL WALL MOUNTS



For Ultra thin  
LED screens



<b>Ref.</b>	<b>FWM-V400</b>
Dimensions in mm	W 460 x D 12 x H 520
VESA width	200, 300 & 400
VESA height	200, 300 & 400

Including flat panel installation materials

## UNIVERSAL WALL MOUNT



<b>Ref.</b>	<b>FWM-688</b>	<b>FWM-690</b>
Dimensions in mm	W 530 x D 28 x H 400	W 728 x D 28 x H 500
Max. mounting range in mm	W 470 x H 360	W 670 x H 446
Min. mounting range in mm	W 88	W 174



Lock the bracket with the optional lock  
**Ref.: 230052(numeric), 230045(key)**



## TILTABLE UNIVERSAL WALL MOUNT



Lock the bracket  
with the optional lock  
**Ref.: 230052(numeric), 230045(key)**

<b>Ref.</b>	<b>FWM-2688</b>
Dimensions in mm	W 540 x D 60 x H 380
Max. mounting range in mm	W 470 x H 360
Min. mounting range in mm	W 80
Tilt adjustment in degrees	0 / +10°



<b>Ref.</b>	<b>FWM-2690</b>
Dimensions in mm	W 740 x D 60 x H 500
Max. mounting range in mm	W 670 x H 446
Min. mounting range in mm	W 227,5
Tilt adjustment in degrees	0 / +10°



## PORTRAIT UNIVERSAL WALL MOUNT



Lock the bracket  
with the optional lock  
**Ref.: 230052(numeric), 230045(key)**

<b>Ref.</b>	<b>FWM-688P</b>
Dimensions in mm	W 530 x D 28 x H 650
Max. mounting range in mm	W 470 x H 600
Min. mounting range in mm	W 88



<b>Ref.</b>	<b>FWM-690P</b>
Dimensions in mm	W 730 x D 28 x H 650
Max. mounting range in mm	W 670 x H 600
Min. mounting range in mm	W 174



## LARGE SCREEN WALL MOUNTS

Please refer to [www.audipack.com](http://www.audipack.com) for brand related large screen wall mounts



<b>Ref.</b>	<b>FWM-V900</b>
Dimensions in mm	W 1004 x D 30 x H 966
Max. mounting range in mm	W 900 x H 600



<b>Ref.</b>	<b>392696</b>	<b>392698</b>
Dimensions in mm	W 1550 x D 50 x H 800	W 1550 x D 50 x H 1290
Max. mounting range in mm	W 2000 x H 740	W 3000 x H 1290





# ***Flatpanel presentation board***

***Soundbar solutions,***

*the perfect quick-install all-in-one presentation solution.*



**Audipack®**

*It's great to have solutions...*

# Flatpanel presentation board



The FBP series is a quick install wall mounted accessory to provide a compact and neatly organized presentation product for screens, audio and camera.

For small sized presentation solutions the FPB allows an easy installation. Just install the finishing board to the wall, the equipment in the monitor bracket and install the screen and camera.

Depending on the thickness of the extra equipment behind the screen, the screen distance to the panel can be adapted.

The FPB is standard equipped with space for an audio option and space for installing a VC camera.

The FPB boards are standard available in white and black, other colours or veneer on request available.



Fase 1

Wall mount plus decoration panel is installed. The soundbar can be added as an option. There's enough space behind the panel for installing it in front of an outlet socket.



Fase 2

Extra equipment can be installed to the universal mounting plate behind the monitor. The universal monitor mounting interface is frontwards adjustable depending on the thickness of the rear installed components.



Fase 3

The monitor can be installed and swivelled upwards for connecting and full access to the rear installed equipment.

## FLATPANEL PRESENTATION BOARD

## FLATPANEL PRESENTATION BOARD



<b>Ref.</b>	<b>FPB-4046</b>
FPB panel dimensions in mm	W 1300 x H 800-875* x D 30-150
Wall offset	33 mm
Max. Screen size in mm	W 1190 x H 670 (aprox)
Mounting interface in mm	Universal, max W 600 x H 400



<b>Ref.</b>	<b>FPB-5055</b>
Panel dimensions in mm	W 1350 x H 850-925* x D 30-150
Wall offset	33 mm
Max. Screen size in mm	W 1250 x H 750 (aprox)
Mounting interface in mm	Universal, max W 600 x H 400




<b>Ref.</b>	<b>FPB-6065</b>
Panel dimensions in mm	W 1500 x H 900-975* x D 30-150
Wall offset	33 mm
Max. Screen size in mm	W 1400 x H 800 (aprox)
Mounting interface in mm	Universal, max W 600 x H 400



\* Soundbar height add-on

## FLATPANEL PRESENTATION BOARD WITH SOUNDBAR

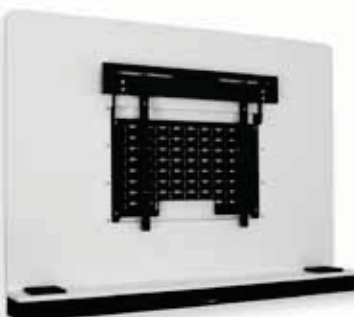

<b>Ref.</b>	<b>FPB-4046SB</b>
FPB panel dimensions in mm	W 1300 x H 800-875* x D 30-150
Wall offset	33 mm
Max. Screen size in mm	W 1190 x H 670 (aprox)
Mounting interface in mm	Universal, max W 600 x H 400
Max Power	2 x 15 Watt



<b>Ref.</b>	<b>FPB-5055SB</b>
Panel dimensions in mm	W 1350 x H 850-925* x D 30-150
Wall offset	33 mm
Max. Screen size in mm	W 1250 x H 750 (aprox)
Mounting interface in mm	Universal, max W 600 x H 400
Max power	2 x 15 Watt



<b>Ref.</b>	<b>FPB-6065SB</b>
Panel dimensions in mm	W 1500 x H 900-975* x D 30-150
Wall offset	33 mm
Max. Screen size in mm	W 1400 x H 800 (aprox)
Mounting interface in mm	Universal, max W 600 x H 400
* Soundbar height add-on	
Max Power	2 x 15 Watt



## ACCESSORIES

### STEREO MINI AMPLIFIER



**Ref.**  
Max. power

**491004**  
2 x 15 Watt bij 4 Ohm / 2 x 8 Watt bij 8 Ohm

### ACTIVE SUB WOOFER



**Ref.**

**LSS-80SW**

Max

80 Watt

Connection

2 x cinch, wire connect & banana plug

Power supply

100-230 VAC

# Wall arms

## for flat panels

**Audipack flat panel swivelling wall arms;**

*a world standard in stability and ease of use.*



**Audipack®**

*It's great to have solutions...*



# ***Relax and enjoy the flexibility***

***Enjoy your flat panel from anywhere in the room.***

Face the screen towards your kitchen, child's play area or your guests. The clean lines of the design negate the need for complex supports.

These extremely stable wall arms allow the flat panel to be set in any position. Their minimalistic looks and neat dimensions ensure the attention is focused on the screen rather than the wall arm. All cables are hidden in the arm itself, so unsightly wiring is out of sight.




- ▲ ***Rigid and safe construction***
- ▲ ***Lockable in every position***
- ▲ ***Very flexible in use***
- ▲ ***Integrated cable duct in swing arms and wall plate***



All cables out of sight through the arm



Lockable in position



L&S 3 mounting interface

## WALL ARMS WITH L&S 3 + VESA



<b>Ref.</b>	<b>390644</b>
Dimensions in mm	W 524 x D 88 x H 310
Max. wall offset in mm	<b>425</b>
Nett weight	12 Kg
Mounting interface	VESA 75, 100 & 200 x 100



<b>Ref.</b>	<b>390588</b>
Dimensions in mm	W 654 x D 88 x H 310
Max. wall offset in mm	<b>555</b>
Nett weight	13 Kg
Mounting interface	VESA 75, 100 & 200 x 100



<b>Ref.</b>	<b>390613</b>
Dimensions in mm	W 731 x D 88 x H 310
Max. wall offset in mm	<b>630</b>
Nett weight	13 Kg
Mounting interface	VESA 75, 100 & 200 x 100



<b>Ref.</b>	<b>390614</b>
Dimensions in mm	W 801 x D 88 x H 310
Max. wall offset in mm	<b>700</b>
Nett weight	14 Kg
Mounting interface	VESA 75, 100 & 200 x 100



## WALL ARMS ALL-IN-ONE PROJECT SOLUTION

**NEW**

*A good tool helps you do a great job, the right product helps you do it faster!*

These wall arms have an integrated space for media player/pc and 3-way power strip (type F, CEE 7/4).

A perfect solution that results in a clean installation and saves you a lot of installation time.



Front view



Rear view

<b>Ref.</b>	<b>FWA-500</b>	<b>FWA-700</b>
Max. wall offset in mm	<b>500</b>	<b>700</b>
Mounting range	W 690 x H 446	W 690 x H 446



<b>Ref.</b>	<b>FWA-500i</b>	<b>FWA-700i</b>
Max. wall offset in mm	<b>500</b>	<b>700</b>
Mounting range	W 670 x H 446	W 670 x H 446
Inclination angle	-10 / 0 / +10°	-10 / 0 / +10°



## TILTABLE AND EXTENDABLE WALL ARMS WITH L&S 3 + VESA



<b>Ref.</b>	<b>390661</b>
Dimensions in mm	W 490-640 x D 72 x H 310
Max. wall offset in mm	<b>540</b>
Nett weight	14 Kg
Mounting interface	VESA 75, 100 & 200 x 100
Tilt adjustment in degrees	0 / +10°
Optional lock	Numeric:230052 / Key:230045




## DOUBLE SWIVELLING WALL ARM WITH L&S 3 + VESA



<b>Ref.</b>	<b>390695</b>
Dimensions in mm	W 650 x D 115 x H 483
Max. wall offset in mm	<b>1087</b>
Nett weight	23 Kg
Mounting interface	VESA 75, 100 & 200 x 100



## WALL ARMS

**ELECTRIC WALL ARM, SINGLE ARM**

**Models for larger screens available on request**

**Ref.**

Dimensions in mm  
Swivel angle  
Mounting interface  
Connectivity

Power supply

**FWA-70E**

W 1478 x D 150 x H 576  
0-90° **4 programmable presets**  
VESA 400 x 400, 400 x 200 and 300 x 300  
Contact relay, RS-232  
Optional wall switch or IR/RF remote  
100-230 VAC 50/60 Hz/24 VDC

Max. °  
70



RS-232

Max.  
80

**ELECTRIC WALL ARM, DOUBLE DIRECTION****Ref.**

Dimensions in mm  
Viewing angle  
Mounting interface

Connectivity

Power supply

**FWA-6065E**

approx W 450 x D 120 x H 450  
**4 programmable presets**  
VESA 200 x 100, 200 x 200, 300x300  
400 x 200, 400 x 400  
Contact relay, RS-232  
Optional wall switch or IR/RF remote  
100-230 VAC 50/60 Hz/24 VDC

Max. °  
65



RS-232

Max.  
40

**ACCESSORIES****MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 43 FOR THE FULL PROGRAM)**

See "Mounting brackets for flat panels" for the full program see page 43



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

**MOUNTING CAMS FOR DIRECT VESA MOUNTING****RECESSED MOUNTING HOLES**

Ref.

**392618**  
M6 x 13



**392318**  
M8 x 13

**390618**  
M10 x 13



**392621**  
M6 x 35

**392620**  
M8 x 35

**REMOTE CONTROL**

**260214**  
IR remote control (internal)

**260215**  
RF remote control (internal)

**WALL SWITCH**

**Ref.**  
Suitable for

**261318**  
FWA-70E, FWA-6065E

# Ceiling mounts

## for flat panels

***With flat panels becoming an increasingly important element of any professional install,***

*the installation speed, adjustability and stability of the accessories are important features.*

*Audipack introduces the new generation of ceiling mounts for flat panels.*



**Audipack®**

*It's great to have solutions...*



## CEILING MOUNTS

# Stylish and Professional!

**Audipack's flat panel ceiling mounts are durable mounting solutions that allow height and angle adjustment of the flat panel.**

**The flat panel ceiling mounts** are slim, discreet and suitable for any brand and type of panel. This product line enables quick installation and complements any installation. Flexible screen adjustment and neatly hidden cables within the tubes are standard features. Fixed lengths and telescopic versions are available to position the screen perfectly for every height and location.

- **The CMV1 and CMV2 series** feature a new special ball-joint to easily direct and adjust the screen towards the viewer. This product line offers standard VESA 75, 100 and 200 mounting patterns.
- **The FCM and FCMD series** are durable and rigid product lines that offer flexibility for installing larger single or back-to-back screens. Perfect for pro AV installation projects.

With the standard available options it is very easy to adapt the ceiling mounts to meet your installation specifications.

**The 700 series flat panel ceiling mounts** are designed for installations with large screens installed onto high ceilings. The product stability allows a slim but long ceiling mount, hiding all cables and offering a continuous height adjustable mounting head with forward inclination.

With the Audipack Lock&Secure system the flat panel is easily mounted and quickly secured. Custom-made models are available in lengths up to 4 metres.

- ▲ **Telescopic models available**
- ▲ **Perfectly angle adjustment**
- ▲ **VESA and L&S 5 suited**
- ▲ **All cables hide through the tube**
- ▲ **VESA and L&S 5 in black**



Angle adjustment



Neatly installed cables




20° adjustment and standard lockable



Standard ceiling finishing on all models



## CMV1 SERIES: CEILING MOUNTS WITH VESA 75 & 100



### Ref. CMV1-0300

Length in mm	300
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°



### Ref. CMV1-0500

Length in mm	500
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°



### Ref. CMV1-0800

Length in mm	800
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°




### Ref. CMV1-1000T

Length in mm	604-1000 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-27°



## CMV2 SERIES: CEILING MOUNTS WITH VESA 100 & 200



### Ref. CMV2-0500

Length in mm	500
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°



### Ref. CMV2-0800

Length in mm	800
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°




### Ref. CMV2-1500T

Length in mm	907-1500 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-27°



## CMV4 SERIES: CEILING MOUNTS WITH VESA 200, 300 & 400



### Ref. CMV4-0500

Length in mm	500
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°



### Ref. CMV4-0800

Length in mm	800
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°



### Ref. CMV4-1500T

Length in mm	907-1500 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-27°



## CEILING MOUNTS

## FCM SERIES: CEILING MOUNTS WITH L&amp;S 5



5 point mounting system  
Bracket is required for screen mounting (page 43)

**Ref. FCM-1000**

Length in mm	1000
Tube diameter in mm	54
Tilt adjustment in degrees	0-20°

**Ref. FCM-1500**

Length in mm	1500
Tube diameter in mm	54
Tilt adjustment in degrees	0-20°

**Ref. FCM-1500T**

Length in mm	909-1500 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-20°



## FCMD SERIES: BACK TO BACK SOLUTIONS



5 point mounting system  
Bracket is required for screen mounting (page 43)

**Ref. FCMD-1000**


Length in mm	1000
Tube diameter in mm	54
Tilt adjustment in degrees	0-20°

**Ref. FCMD-1500**

Length in mm	1500
Tube diameter in mm	54
Tilt adjustment in degrees	0-20°

**Ref. FCMD-1500T**

Length in mm	909-1500 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-20°



## 700 SERIES HEAVY DUTY CEILING MOUNTS

**Ref. 390755**

Length in mm	1000 (available up to 4000)
Tilt adjustment in degrees	0-20° in 5° steps
Optional lock	Numeric:230052 / Key:230045
Optional ceiling finishing ring	CFR-700
Also available	<b>390756</b> (back to back version)



5 point mounting system  
Bracket is required for screen mounting (page 43)

**Ref. 390758**

Length in mm	1000 (available up to 4000)
Optional lock	Numeric:230052 / Key:230045
Optional ceiling finishing ring	CFR-700 (2 pieces required)



5 point mounting system  
Bracket is required for screen mounting (page 43)

## XL CEILING MOUNT



### Ref.

### FCM-V600

Length in mm

1500 (other lengths available on request)

Tilt adjustment in degrees

15

Dimensions in mm

W 1300 x D 400 x H 1825

Mounting interface

VESA 400x200, 400x400,  
600x200 and 600x400



## ACCESSORIES

### MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 43 FOR THE FULL PROGRAM)

See "Mounting brackets for flat panels" for the full program see page 43



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

### EQUIPMENT CABINET



**Ref.**  
Max. equipment dimensions in mm

For above ceiling installation



**EC-5**  
W 350 x D 350 x H 100

Suitable for the CMV-1 series  
Suitable for power adapters etc.



**ECV-1**  
W 218 x D 64 x H 78



**EC-6**  
W 19" x 1HE/U



### CAMERA SUPPORT




**Ref.**

**CS-1**




## CEILING MOUNTS

## EXTENSION TUBES



Diameter 54 mm.

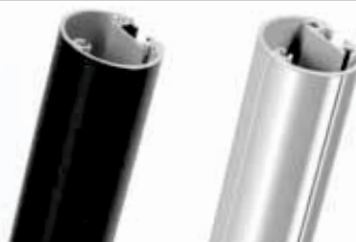**Ref.**

Length in mm

Length gain in mm

**ET-1000**

1000

940

**ET-1500**

1500

1440

**ET-2000**

2000

1940

**ET-2500**

2500

2440

## MOUNTING HEAD (ONLY SUITABLE ON FCM AND FCMD)

Max.  
60**Ref.****FPH****FPHD**

## TRUSS MOUNTS (Ø 50 mm TRUSS)

**Ref.**

Suitable for

**TM-54**

54 mm tubes

**TM-60 (Telescopic tube sets only)**

60 mm tubes

## CEILING MOUNT PLATES WITH TILT ADJUSTMENT



Adjustment: -5° to +90°



Standard on:

CMV1-1000T

CMV2-1500T

CMV4-1500T

FCM-1000

FCM-1500

FCM-1500T

FCMD-1000

FCMD-1500

FCMD-1500T

**Ref.**

Suitable for

**CMP-4**

60 mm tubes

**CMP-5**

54 mm tubes

# ***Ceiling to floor solutions***

## ***for flat panels***

### ***The Audipack ceiling to floor solutions***

*A free standing and solid solution in any environment*





# Create a free standing

## solution...

The ceiling to floor (CTF) and floor to wall (FTW) products are the ideal solutions for installing flat panels in a free standing position in a room or when a wall is too weak constructed to hold a rather large (touch) screen. The CTF and FTW products are manufactured from modern designed aluminium profiles with an integrated cable duct. For each application a choice, that why Audipack offers 3 different contour shaped profiles.

Your choices:

The 700 series is the slimmest model which can be used in a single and double version. With its detachable cable duct covers it offers a slim but strong presentation solution.



700 series

The 800 series is a mid-size profile with 2 cable ducts and suitable for mid to large sized LED screens. The screens can be installed along the length of the column.



800 series

The 900 series is the most rigid and strong column. It's strong enough to hold the heaviest screens and rigid enough to handle the longest lengths. With its large internal cable duct the best solution for multiple screen installations like videowalls.



900 series

**The ceiling to floor solutions can be made in any length.  
A perfect solution for any situation...**

Order explanation:

### CTF-700D-3000

Length from constructional ceiling to floor  
(any length available)

Double 700 series column

Ceiling to floor solution

- ▲ **A free standing solution**
- ▲ **Rigid and flexible construction**
- ▲ **Single or multi screen mounting**
- ▲ **Integrated cable duct all columns**

*To install your flat panel to an Audipack product an additional flat panel bracket is needed.*

*See "Mounting brackets for flat panels" section on page 43 for an overview of the available brackets.*

### Choose your interface.

The FS series is available with 2 different screen interfaces.

The L&S 5 is the Audipack's AV cross rental solution with a wide variety of installation options on the job. The Multi-Vesa solution is a very cost effective mounting interface based on the Vesa mounting pattern on the screen. With mounting cams the screen can easily be locked in the mounting head.



Mounting interface: L&S 5



Mounting interface: Multi-Vesa

### CEILING TO FLOOR SINGLE 700



Ref.	CTF-700
Standard length	2700 mm (max. 5000 mm)
Column size	60 x 110 mm
Max. load (aprox)	1 x 50, 2 x 40, 3 x 30 Kg
Mounting interface	L&S3 - Multi-Vesa
Cable duct	2 removable covers

Bracket is required for screen mounting (page 43)

### CEILING TO FLOOR DOUBLE 700



Ref.	CTF-700D
Standard length	2700 mm (max. 5000 mm)
Column size	2 x 60 x 110 mm
Max. load (aprox)	1 x 60, 2 x 50, 3 x 30 Kg
Mounting interface	L&S3 - Multi-Vesa
Cable duct	4 removable covers

Bracket is required for screen mounting (page 43)

### FLOOR TO WALL SINGLE 700



Ref.	FTW-700
Standard length	2000 mm (max. 5000 mm)
Column size	60 x 110 mm
Max. load (aprox)	1 x 50, 2 x 40, 3 x 30 Kg
Mounting interface	L&S3 - Multi-Vesa
Cable duct	2 removable covers

Bracket is required for screen mounting (page 43)

### CEILING TO FLOOR SINGLE 800



Ref.	CTF-800
Standard length	2700 mm (max. 5000 mm)
Column size	125 x 60 mm
Max. load	85 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	hinged door


Bracket is required for screen mounting (page 43)

### CEILING TO FLOOR SINGLE 900



Ref.	CTF-900
Standard length	2700 mm (max. 5000 mm)
Column size	183 x 91 mm
Max. load	2 x 85 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	hinged door

Bracket is required for screen mounting (page 43)

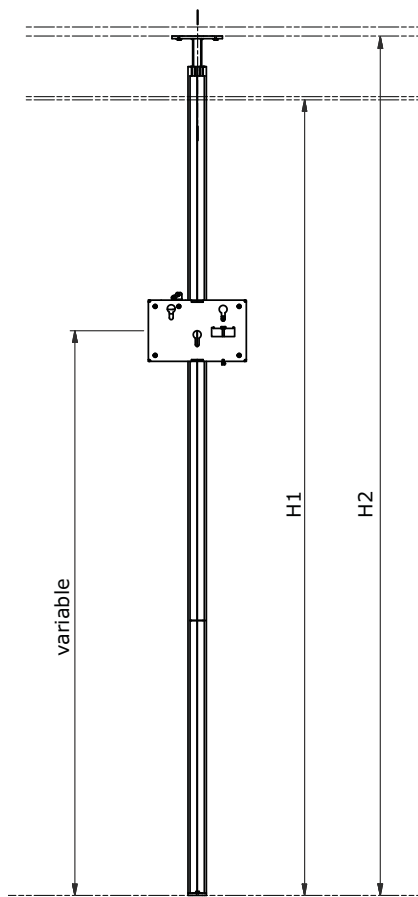

For ordering custom length CTF, please provide dimensions H1 and H2

# Ceiling to Floor *with* **integrated Audio**

**NEW**



## **Permanent presentation solution with integrated audio.**

The CTF-Atlas is a unique ceiling to floor solution for your flat panel up to 65 inch.

The secret of this presentation solution is the integrated audio feature in the vertical column. Additional peripherals can easily be applied to the column in the specially designed EC-1 cradle. The CTF-ATLAS is manufactured on demand to fit the specific ceiling height.

- ▲ **Easy equipment installation**
- ▲ **Portrait or landscape flat panel positioning**
- ▲ **Integrated passive audio**



Built-in speakers



Select a bracket for installing your flat screen on pag. 43



Optional stereo mini amplifier  
491004



Optional equipment holder EC-1

## **CEILING TO FLOOR SOLUTION**



### **Ref.**

Dimensions in mm  
Presentation height in mm  
Mounting interface  
Max power  
Frequency

### **CTF-ATLAS**

W 147 x D 143 x H 2700  
1480-1590 (center screen)  
L&S 5  
2 x 30 Watt at 8 Ohm  
70 Hz - 20 KHz



## CEILING TO FLOOR SOLUTIONS

**ACCESSORIES****CEILING FINISHING RING**

CFR-700



CFR-800



CFR-900

**MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 43 FOR THE FULL PROGRAM)**

See "Mounting brackets for flat panels" for the full program see page 43



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

**AUDIO SOLUTIONS**

Interface for Soundbar  
Ref.



700 series single  
LSS-FS700



700 series double  
LSS-FS700D

For every flat panel a made to measure soundbar is available.  
See chapter "Audio solutions" page 3 for more information

800 series  
LSS-FS800

900 series  
LSS-FS900

**AIRCURTAIN (PREVENTS HEAT BUILD-UP BETWEEN WINDOW AND FLAT PANEL)**

Ref.  
Width



ACG-750AC  
750 mm



# ***Column mounts***

***for flat panels***

***The Audipack column mounts for flat panels***

*are the most flexible solution for mounting onto pillars or columns*



**Audipack®**

*It's great to have solutions...*



# Stylish and Professional!

**Audipack column mounts are ideal for installing flat panels onto round or square columns.**

The metal clamp gives a flexible and secure method of mounting that does not undermine the column's strength. All Audipack Lock&Secure mounts can be used in conjunction with this product.

These mounts are custom made to the client's order. They are available in difference diameters for single or multiple flat panel installation.

A slim and solid solution for all situations.

Check [www.audipack.com](http://www.audipack.com) for an updated product range

*To install your flat panel to an Audipack product an additional flat panel bracket is needed.*

*See "Mounting brackets for flat panels" section on page 43 for an overview of the available brackets.*

Order explanation:


**FKM-0400B**

Colour, black (available in any colour)

Column diameter in mm

Flat panel column mount (for 2 screen mounting **FKMD**)

- ▲ **Does not affect constructional column strength**
- ▲ **Clamping installation**
- ▲ **Custom made for any situation**
- ▲ **Standard colour black RAL 9005**



Available for multiple screen mounting



Available for square columns



Safe construction



No drilling needed

# ***Truss mounts***

## ***for flat panels***

***The Audipack truss mounts for flat panels are***

*a sturdy solution for mounting flat panels to truss constructions.*



**Audipack®**

*It's great to have solutions...*

## Install flat panels to a **truss** **safely** and **quickly**

*There is no easier way to mount flat panels to a truss than with one of the Audipack truss mounting solutions.*

Audipack offers a range of flexible products that feature safety and speed as key elements. The low risk way to mount the flat panels with the minimal use of tools and external materials.

A fixed mount is available which is directly mounted to the truss. This product line is available with varying lengths of tubes for total flexibility.

*To install your flat panel to an Audipack product an additional flat panel bracket is needed.*

*See "Mounting brackets for flat panels" section on page 43 for an overview of the available brackets.*

- ▲ **Telescopic models available**
- ▲ **Easy and safe installation**
- ▲ **Suitable for Ø 50 mm truss**
- ▲ **Free adjustable angle**

Stainless steel security cable: **399941**



### DIRECT TRUSS MOUNT



2 X



<b>Ref.</b>	<b>390694</b>
Dimensions in mm excl. clamps	W 450 x D 30 x H 450
Suitable for truss width in mm	250 - 300
Truss diameter in mm	50



<b>Ref.</b>	<b>392560</b>
Dimensions in mm excl. clamps	W 530 x D 30 x H 450
Suitable for truss width in mm	300 - 400
Truss diameter in mm	50



### TRUSS TUBE SETS



<b>Ref.</b>	<b>FTC-1500T</b>
Length in mm	909-1500
Truss diameter in mm	50
Tilt adjustment in degrees	0-20°
Rotation in degrees	360°



<b>Ref.</b>	<b>FTCD-1500T</b>
Length in mm	909-1500
Truss diameter in mm	50
Tilt adjustment in degrees	0-20°
Rotation in degrees	360°



**Back-to-Back**





# ***Wall mounted lift systems***

## ***for touch screens***

***The electric height adjustable wall lift systems,***

*allow you to use touch screen monitors in a more flexible way. Just push a button to change the user height. Ideal for schools or rooms with multiple users. The wall systems are easy to install and there are floor and ceiling options.*



**Audipack®**

*It's great to have solutions...*

# **Plug & Play** height adjustable **wall lift systems**

## **Height adjustable wall lift systems for touch screens**

These wall lift systems are perfect for the education market, being flexible, durable and rigidly constructed.

Lift your large flat panel or touch screen in any position with just the touch of a button.

These lift systems offers a very short installation time! The lift systems are provided with an universal mounting systems to mount any brand and type of screen up to 160 Kg.

Audipack designs and manufactures in privately owned design studios and factories, so we can customise the system to suit individual customer's needs. We use our own durable materials that are easy to clean and highly scratch resistant.



**1 hour installation!**

- ▲ **Short installation time**
- ▲ **Easy equipment installation**
- ▲ **Durable, well designed and slim constructions**
- ▲ **Safe and secure**



DWS-120E, DWS-160E



Mounting interface: VESA 400 x 200,  
400 x 400, 600 x 200, 600 x 400 and L&S5

All products



Locked when mounted with  
an Audipack mounting bracket

DWS-120E, DWS-160E



Lockable VESA  
mounting patterns



## WALL MOUNTED LIFT SYSTEM



Ref.	DWS-T100E
Height adjustable in mm	650
Wall offset in mm	100
Mounting interface	VESA 400 x 200, 400 x 400, and L&S5
Connectivity	Hand control included, contact relay Optional wall switch or RF remote
Power	230 VAC 50-60Hz/24 VDC



Ref.	DWS-T150E
Height adjustable in mm	650
Wall offset in mm	150
Mounting interface	VESA 400x200, 400x400, and L&S5
Connectivity	Hand control included, contact relay Optional wall switch or RF remote
Power	230 VAC 50-60Hz/24 VDC



Optional suitable for installing between floor and ceiling


**DWS-CTF2700**

Optional soundbar, use **LSS-DWS-T** for mounting.



## ELECTRIC HEIGHT ADJUSTABLE WALL LIFT SYSTEMS

Ref.	DWS-120E
Dimensions in mm	W1010 x H2300 x D125
Presentation height in mm	700-1580 (centre screen)
Mounting interface	VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400 and L&S5
Connectivity	RF remote included
Power	230 VAC 50-60Hz



Ref.	DWS-160E
Dimensions in mm	W1010 x H2300 x D125
Presentation height in mm	700-1580 (centre screen)
Mounting interface	VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400 and L&S5
Connectivity	Contact relay Optional wall switch & IR/RF remote
Power	230 VAC 50-60Hz



## ACCESSORIES

## MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 43 FOR THE FULL PROGRAM)

See "Mounting brackets for flat panels" for the full program see page 43



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UPRO series



Brand related mounts



VESA mounts

## WALL MOUNTED LIFT SYSTEMS

## MOUNTING CAMS FOR DIRECT VESA MOUNTING

## RECESSED MOUNTING HOLES



Ref.

392618  
M6 x 13392318  
M8 x 13390618  
M10 x 13392621  
M6 x 35392620  
M8 x 35

## FLOOR TO CEILING MOUNTING SET

## LINE FILTER



Ref.

**DWS-FCK**  
Columns are custom made, to match required heightRef.  
Suitable for**DWS-FCK2700**  
DWS-T100Ref. P6247  
For 230 Volt distortions

## REMOTE CONTROLS

Ref.  
Suitable for**460286 (RF)**  
DWS-T100 and DWS-T150**261318**  
DWS-T100 and DWS-160E**260214 (IR)**  
DWS-160E**260215 (RF)**  
DWS-160E

## WALL MOUNT EXTENSION SET

Suitable for DWS-120E and DWS-160E

Ref.  
Adjustable range in mm**DWS-WME**  
65-100

## VESA EXTENSION SET TO 600x400

Ref.  
Mounting range  
Suitable for**DWS-MEV6**  
Vesa 600x400  
Fits only DWS-T100 & DWS-T150

## AUDIO SOLUTIONS




For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" page 3 for more information

# ***Table lift systems***

***for flat panels***

*The FTL lift series is a complete new look on  
hiding small displays in tables and desktops*

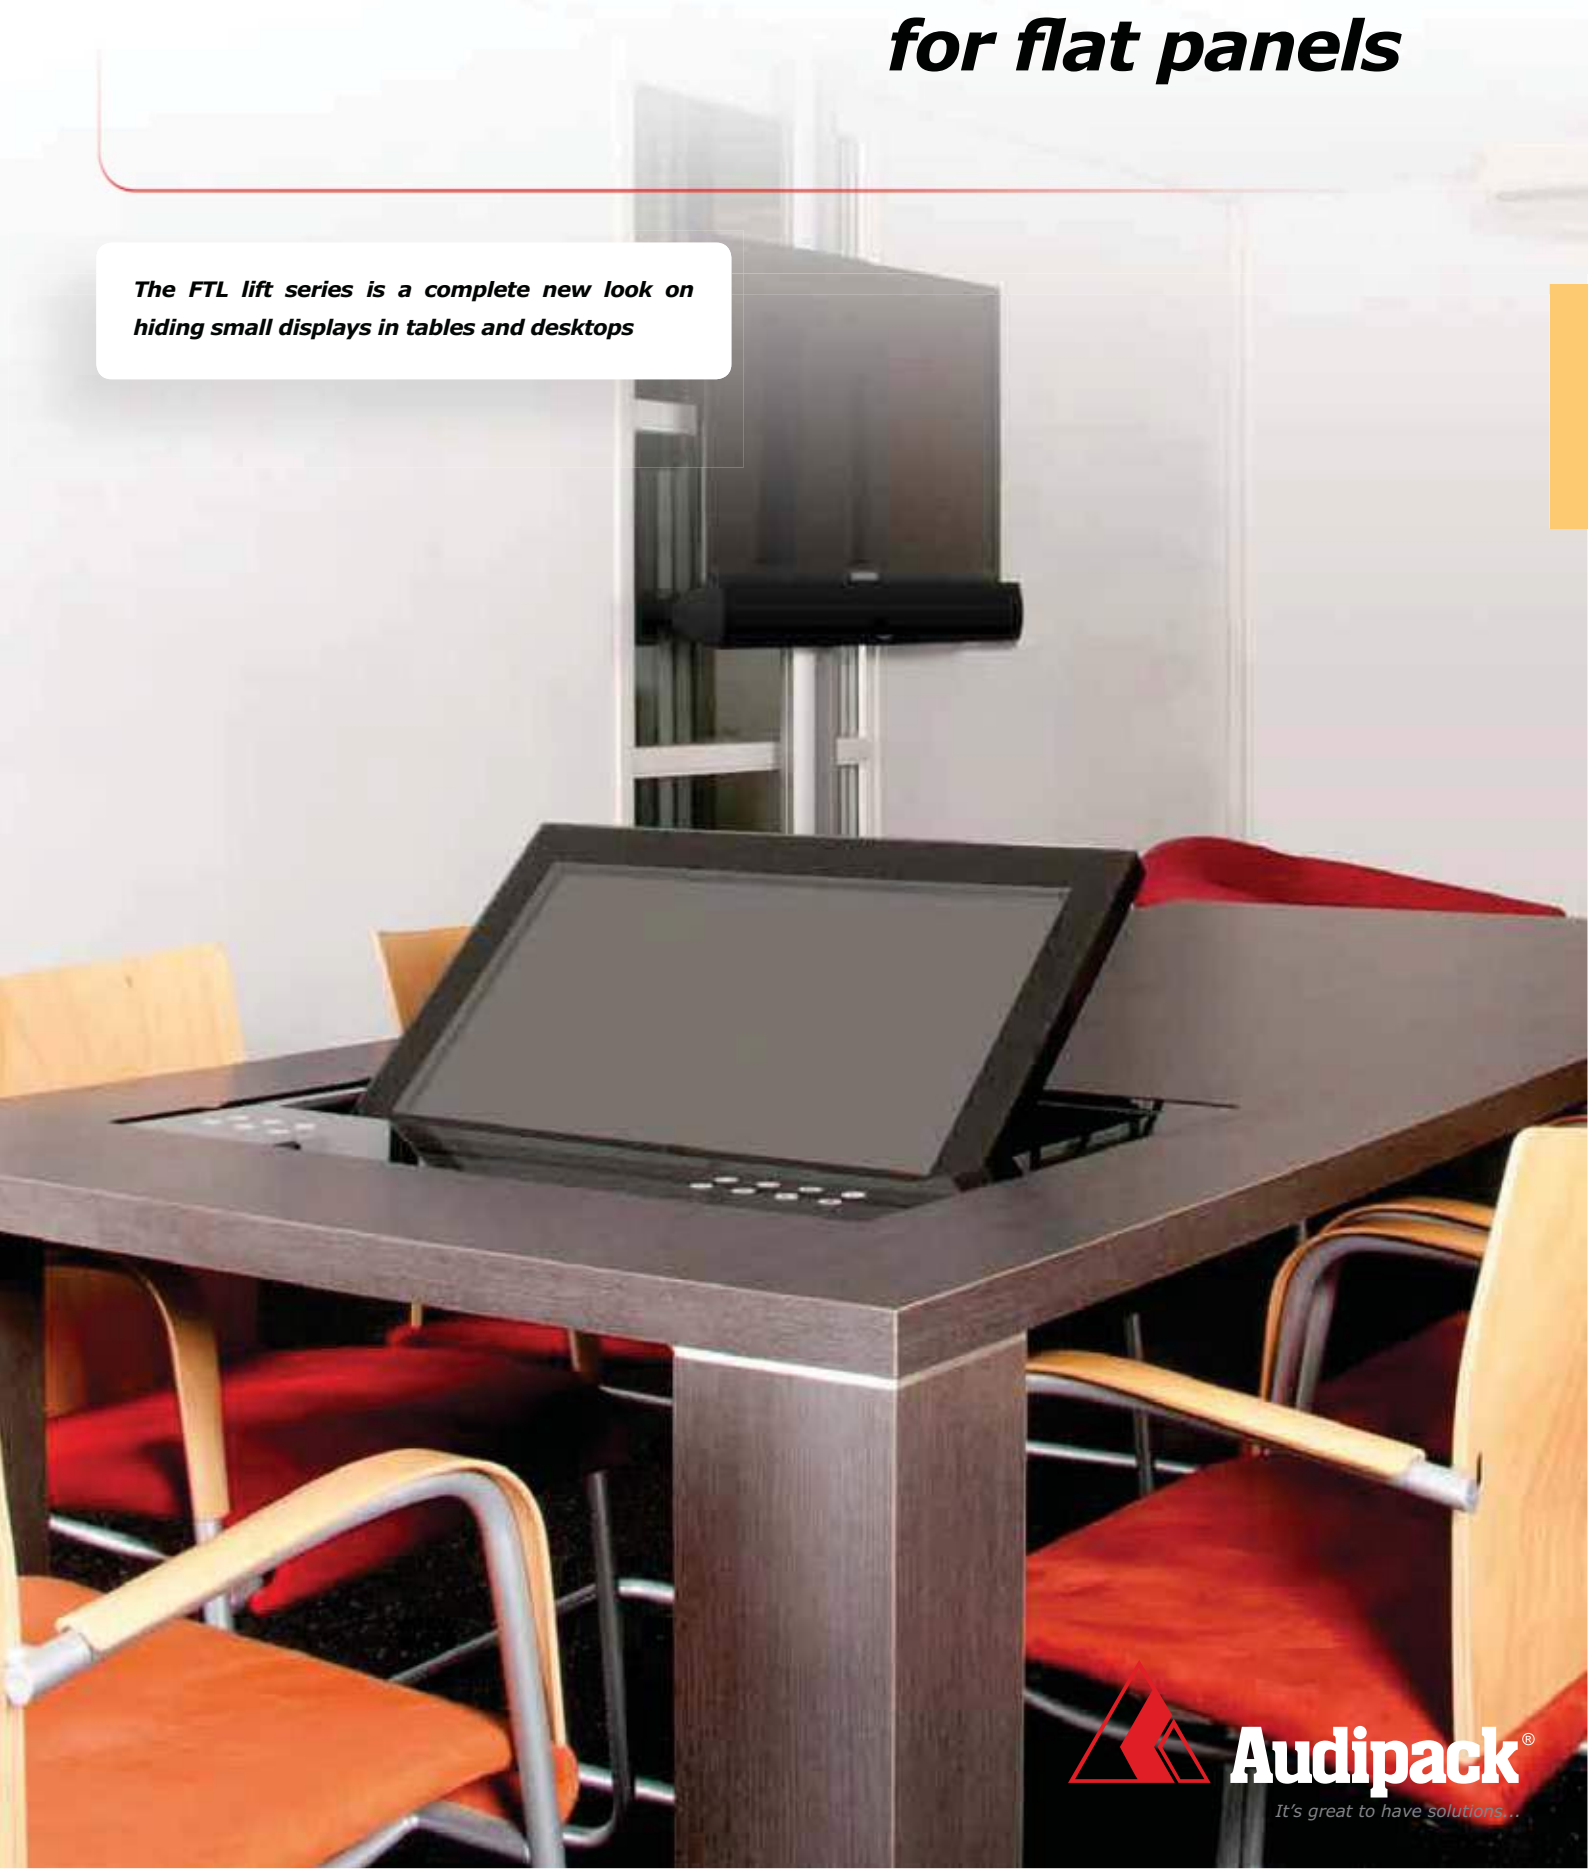

**Audipack®**

*It's great to have solutions...*

# Reveal your display from your *table top*



*Imagine a completely flush system build-in the table top, tailor made for any application, that can be used with your selection of LCD screen. Having limitless possibilities to adapt the system to it's designated function...*

*The FTL series is a new view on installing electric movable screens in table tops keeping an eye on costs, but offering stylish appearance and maximum functionality.*



The screen position is simply controlled by capacitive control buttons, just select your preferred (pre-programmable) viewing angle and the screen positions itself to your liking. The keyboard and mouse will raise from out of the system ready to use.

Need more user functions? Just add extra capacitive control buttons for system operation such as voting, muting, image change etc.

The full glass front is completely flush integrated in the table, offering an easy to clean and hygienic working space and easy to use as table top in closed position, only your finger activates the system.

Customisation:

The FTL offers freedom in personalising it to any type of use.

Glass layout, screen size, system colour and button annotation can be modified.

- ▲ **Capacitive control buttons for screen positioning**
- ▲ **Controllable by RS-232 and contact relay**
- ▲ **Standard suitable for 24" displays**
- ▲ **Flush, clean and ergonomic design**
- ▲ **High grade finishing**
- ▲ **Custom models available**
- ▲ **Low noise lift mechanism**

Contact sales for more technical product information.

## TABLE LIFT SYSTEM



### Ref.

Dimensions in mm.  
Screen size  
Mounting interface  
Power supply  
Connectivity

### FTL-24

W 690 x D 578 x H  
24 inch LCD (16:10)  
VESA 100  
100-230 VAC 50-60Hz  
contact relay, RS-232



Optional 8 extra capacitive  
function buttons

Ref. 261348





# Watch soccer

## with your friends



The Garden-View is the perfect addition to lounge areas at home or at hotels etc.

The GV-46E - GardenView, is a temporarily outdoor cabinet with built-in lift system for TV's.

Why not enjoying your favourite program, concert or film TV while sitting comfortable in your lounge set.

The Garden-View is standard equipped with a build-in remote controlled lift system and is available for 32, 40 and 46 inch TV's.

With the wireless remote the TV pops up out of the furniture. A splash of rain is no problem because the Garden-View is splash water proof.

The Garden-View is also custom build available.

\*Garden-View is a registered product.

### Technical specifications:







- ▲ Veneer finish as standard
- ▲ Splash proof
- ▲ Electric lift inside
- ▲ Swivel / brake wheels

### Benefits:

- ▲ Very nice finishing
- ▲ Fits in every garden or luxurious room
- ▲ Also custom models available

## GARDEN-VIEW



Ref.	GV-32E	
Max. presentation height in mm	1100	 
Max. screen thickness in mm	52 - 64*	
Mounting interface	max VESA 400 x 400	
		Max. "
		32
Ref.	GV-40E	
Max. presentation height in mm	1200	 
Max. screen thickness in mm	52 - 64*	
Mounting interface	max VESA 400 x 400	
		Max. "
		40
Ref.	GV-46E	
Max. presentation height in mm	1300	 
Max. screen thickness in mm	52 - 64*	
Mounting interface	max VESA 400 x 400	
		Max. "
		46

\* See drawings at [www.audipack.com](http://www.audipack.com)



# ***Floor lift systems***

***for flat panels***

***Have you ever thought about hiding your flat panel when not in use?***

*It's no problem with the Audipack floor lift system.  
A push of a button lifts and rotates  
a flat panel of any size.*



**Audipack®**

*It's great to have solutions...*

# Experience the magic of the unexpected

**Flat panels appear out of nowhere, impressively, silently and safely with the Audipack floor lift system.**

This unique system is ideal when a wall or furniture is not available or desired for a screen mounting.

With a simple touch of a button, a small floor hatch opens and the screen raises to the viewing position. Once the screen is raised, the hatch is almost invisible.

The optional rotation of the screen means it can be angled to face seating anywhere in the room, or even to face into your garden!

These flat panel floor lift systems are customised to fit each application. The construction size of the lift is determined by the space available below the floor.

We have solutions for any situation.

Model range:

- Vertical lifting with electric floor hatch
- Vertical lifting with rotation and electric floor hatch
- Available for any size of flat panel

*"Please contact sales for additional technical information"*

- ▲ **Hidden comfort**
- ▲ **Optional rotation**
- ▲ **Available for any size of screen**
- ▲ **Very slim finishing**
- ▲ **"Walkable" floor hatch**
- ▲ **Low noise lift mechanism**

To install your flat panel to an Audipack product an additional flat panel bracket is needed.

See "Mounting brackets for flat panels" section on page 43 for an overview of the available brackets.



# ***Vertical ceiling lift systems***

***for flat panels***

***Hide your flat panel after use!***

*Hide any flat panel with the Audipack vertical ceiling lift systems.*

*Available for any size of flat panel.*




**Audipack®**

*It's great to have solutions...*



You'll be **amazed** the first time

**you see this!**

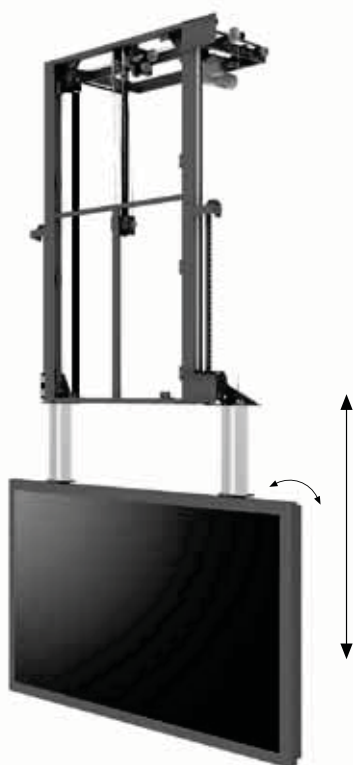

Shown model is a 103" ceiling lift.

Available 103" models:

P3940 (vertical lift)

P5140 (vertical lift and tilt!)

- ▲ **Hidden comfort**
- ▲ **Optional rotation and electric ceiling hatch**
- ▲ **Available for any size of screen**
- ▲ **Very slim finishing**
- ▲ **Anti-drop safety device**

**Our high quality, silent and durable vertical ceiling lift systems lower a flat panel from above the ceiling.**

The lift is equipped as standard with a dropdown safety device and ceiling finishing kit. The low voltage motors mean the lift is silent and the high quality components result in a durable, reliable and low maintenance system.

A ceiling hatch that opens before the flat panel is lowered is available as an option, as well as electric rotation and inclination of the panel (see price list).

The system can be custom made for any screen size.

To control the system other than relays contact, please select the below list remote controls.

**Ref. 260214** (Internal IR remote control set, for lift + hatch)

**Ref. 260215** (Internal RF remote control set, for lift + hatch)

To install your flat panel to an Audipack product an additional flat panel bracket is needed.

See "Mounting brackets for flat panels" section on page 43 for an overview of the available brackets.

## VERTICAL LIFT SYSTEMS



Power supply: **230 VAC 50-60 Hz/24 VDC**

Ref.	FCL-A	
Dimensions in mm	W 920 x D 185/560 x H 700	
Max. flat panel dimensions in mm*	W 800 x D 100 x H 550	Max. 32
Nett stroke in mm	550	Max. 80
Wider model	<b>FCL-A1</b> (Max. screen width W 1000 mm)	
Ref.	FCL-B	
Dimensions in mm	W 1210 x D 185/560 x H 930	
Max. flat panel dimensions in mm*	W 1090 x D 100 x H 780	Max. 42
Nett stroke in mm	780	Max. 80
Wider model	<b>FCL-B1</b> (Max. screen width W 1290 mm)	
Ref.	FCL-C	
Dimensions in mm	W 1375 x D 185/560 x H 1005	
Max. flat panel dimensions in mm*	W 1255 x D 100 x H 855	Max. 52
Nett stroke in mm	855	Max. 80
Wider model	<b>FCL-C1</b> (Max. screen width W 1455 mm)	

\* The actual max. screen inches are determined by the "max. screen width" limits.

# ***Fold down ceiling lift systems***

## ***for flat panels***

***Ever thought of hiding your flat panel when not in use?***

*Audipack offers a neat solution*



**Audipack®**

*It's great to have solutions...*



# Flat panel *fold down* lift systems

## ***A different thought about concealing your TV in the room...***

When installing TV's on the wall, or popping out of a furniture is not an option or simply not possible, than the Audipack fold down lift systems are the best solution.

With this unique system the TV folds down from the ceiling with just a push on a button. The TV is mounted to the ceiling, but cause of the 100 degrees opening angle the TV aims perfectly to the viewing position.

The fold down lift systems are available in surface mounted and in-ceiling mounted units.

The **surface mounted** versions are very thin lift systems that can be installed in any room, from bed rooms to small offices.

The lightweight lift enables an easy and quick installation for any installer.


The **in-ceiling mounted** versions are available up to almost any screen size and applicable also in off-shore environments; also outdoor (!). Even better: with these models is an optional automatic lowering panel available that closes the ceiling above the TV; as if the TV has always been there....

Surface mounted model

In-ceiling mounted model with optional available ceiling closing unit



- ▲ **Ultra-thin installation height (surface mounted version)**
- ▲ **Perfect viewing angle**
- ▲ **Neatly finished, no mechanics visible**
- ▲ **Marine and outdoor models available**

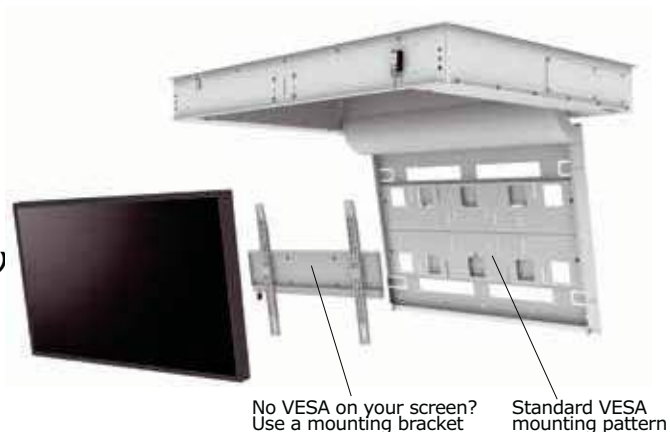

Minimalistic design and neatly finished



Optional ceiling closing unit



Neatly finished



Outdoor models, a water repellent rubber seal closes the lift up to IP 56.

**SURFACE MOUNTED FOLD DOWN LIFT SYSTEMS**

Standard VESA 100 x 200, 200 x 200, 200 x 400  
and 400 x 400, no additional bracket required



"Registered design, patent pending"

Power supply: **100-240VAC/5A 50-60 Hz**

**Ref.****FFCL-3032S**

Dimensions in mm  
Max. flat panel in mm  
Connectivity

Approx. W 1200 x D 750 x H 100  
W 980 x D 50 x H 595  
Contact relay, RS-232  
Optional wall switch & IR/RF remote

**Ref.****FFCL-4046S**

Dimensions in mm  
Max. flat panel in mm  
Connectivity

Approx. W 1400 x D 1000 x H 100  
W 1120 x D 50 x H 675  
Contact relay, RS-232  
Optional wall switch & IR/RF remote

**FOLD DOWN LIFT SYSTEMS (IN-CEILING)**

Standard VESA 200 x 200, 400 x 200,  
600 x 200 and 800 x 400



Connectivity:  
Contact relay, wall switch, IR/RF remote

Power supply: **230 VAC 50-60 Hz/24 VDC**

**Ref.****FFCL-3032**

Dimensions in mm  
Max. flat panel in mm

W 1416 x D 963 x H 165  
W 980 x D 140 x H 595

**Ref.****FFCL-4042**

Dimensions in mm  
Max. flat panel in mm

W 1496 x D 1058 x H 165  
W 1060 x D 140 x H 690

**Ref.****FFCL-4650**

Dimensions in mm  
Max. flat panel in mm

W 1586 x D 1128 x H 165  
W 1150 x D 140 x H 760

**Ref.****FFCL-5255**

Dimensions in mm  
Max. flat panel in mm

W 1776 x D 1258 x H 200  
W 1340 x D 175 x H 840

**Ref.****FFCL-6065 (with safety clamp)**

Dimensions in mm  
Max. flat panel in mm

W 1972 x D 1520 x H 286  
W 1620 x D 155 x H 1045

**STAINLESS STEEL FOLD DOWN LIFT SYSTEMS (WITH SAFETY CLAMP)**

Standard VESA 200 x 200, 400 x 200,  
600 x 200 and 800 x 400



Connectivity:  
Contact relay, wall switch, IR/RF remote

Power supply: **230 VAC 50-60 Hz/24 VDC**

**Ref.****FFCL-3032-OD**

Dimensions in mm  
Max. flat panel in mm

W 1416 x D 1148 x H 165  
W 980 x D 140 x H 595

**Ref.****FFCL-4042-OD**

Dimensions in mm  
Max. flat panel in mm

W 1496 x D 1243 x H 165  
W 1060 x D 140 x H 690

**Ref.****FFCL-4650-OD**

Dimensions in mm  
Max. flat panel in mm

W 1586 x D 1313 x H 165  
W 1150 x D 140 x H 760

**Ref.****FFCL-5255-OD**

Dimensions in mm  
Max. flat panel in mm

W 1776 x D 1443 x H 200  
W 1340 x D 175 x H 840

**Ref.****FFCL-6065-OD**

Dimensions in mm  
Max. flat panel in mm

W 1972 x D 1705 x H 286  
W 1620 x D 155 x H 1045



## FOLD DOWN CEILING LIFT SYSTEMS

## ACCESSORIES

## MOUNTING BRACKETS FOR FLAT PANELS, NOT SUITABLE FOR SURFACE MOUNTED MODELS



<b>Ref.</b>	<b>P2825</b>	<b>P2826</b>	<b>P3560</b>	<b>P3399</b>	<b>P3304</b>	<b>P3595</b>
Type of material	mild steel	mild steel	mild steel	stainless steel	stainless steel	stainless steel
Max. mounting range in mm	W 470 x H 360	W 670 x H 446	W 810 x H 671	W 470 x H 360	W 670 x H 446	W 810 x H 671
Min. mounting range in mm	W 125	W 125	W 120	W 125	W 125	W 120

## WALL SWITCH



<b>Ref.</b>	<b>261318</b>
-------------	---------------

## REMOTE CONTROL



<b>Ref.</b>	<b>260214 (IR)</b>	<b>260215 (RF)</b>
-------------	--------------------	--------------------

## ELECTRIC CEILING CLOSING UNIT



The electric ceiling closing unit is an optional unit that closes the ceiling above the flat panel in opened position. This advantages in a continued ceiling structure above the screen and makes the lift almost invisible. Please refer to the price list for a model listing.




<b>Ref.</b>	<b>FFCL-CF</b>
-------------	----------------

# ***Pop up lift systems***

## ***for flat panels***

### ***Pop up lift systems,***

*let you forget about your screen when not in use but reveal it instantly at the push of a button.*

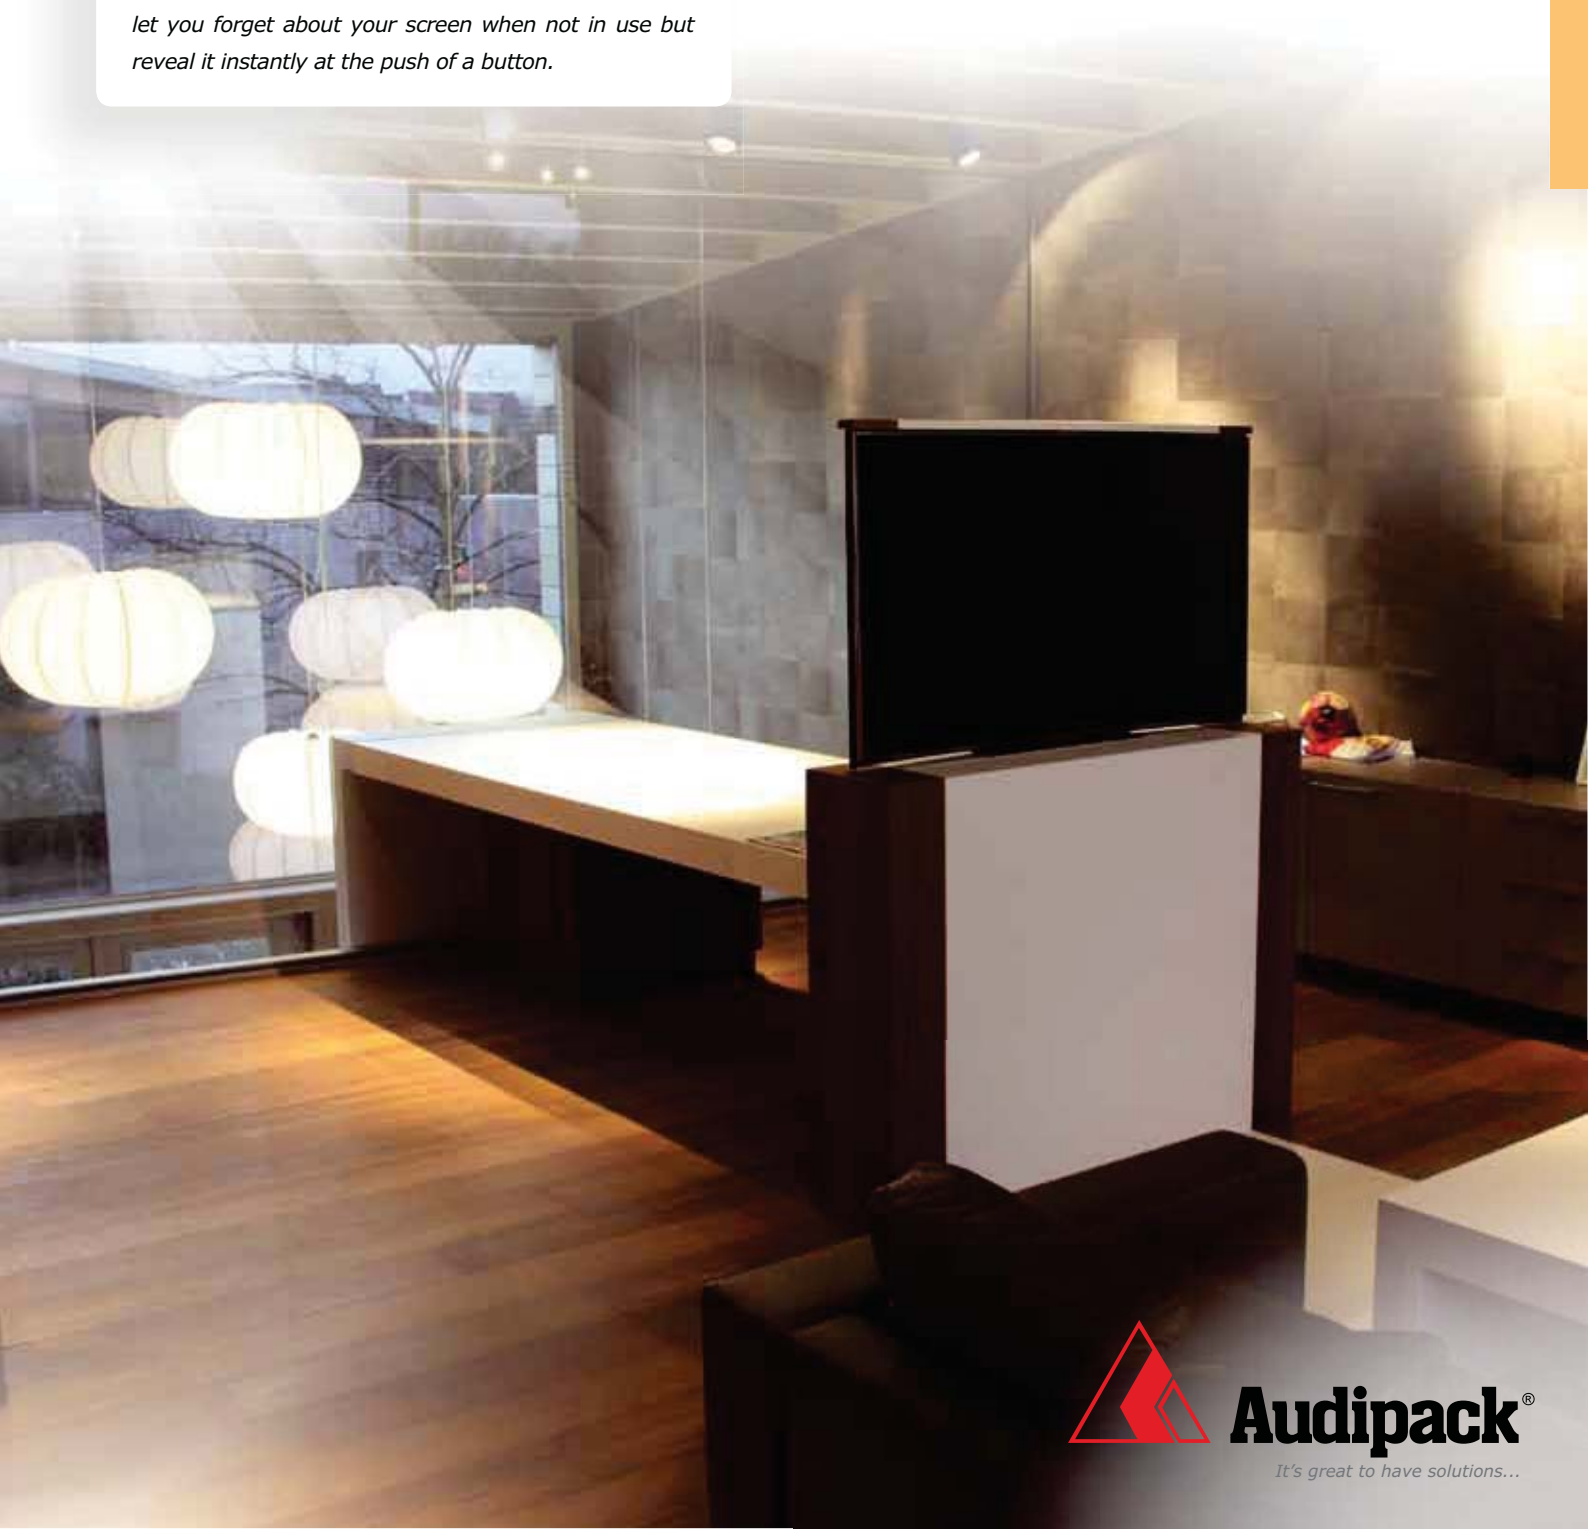

**Audipack®**

*It's great to have solutions...*



# Invisible luxury

with the Audipack **pop up** lift systems



## *Silently raises and lowers the TV out of the furniture*

No jerky movement or unexpected sounds, just the silent, smooth appearance of the screen on demand.

This fast and rigid lift system complements interior furniture. Well designed, the plug and play lift is quick to install and robust in operation.

## *The telescopic Pop up lift systems*



pops up your screen of up to 65". Single, double and quad column models are available.

## *The high end Pop up lift systems*



are compact lift systems to fit any screen. Standard options are rotation (**R**), electric hatch opening (**H**) and anti-theft security class 3. Expand your lift with 1 or more standard options.

- ▲ **Integrated cable guidance**
- ▲ **Easy installation**
- ▲ **Rigid build**
- ▲ **Modern design**



Universal  
mounting interface



Electric opening hatch  
optional: **H**



Cable guidance



## TELESCOPIC POP UP LIFT SYSTEMS

Power supply: 230 VAC 50-60 Hz/24 VDC

	<table> <tr> <th>Ref.</th><th>P3674 Single column lift</th></tr> <tr> <td>Dimensions in mm</td><td>W 400 x D 213 x H 585-1260</td></tr> <tr> <td>Nett stroke</td><td><b>675</b></td></tr> <tr> <td>Presentation height (centre screen)</td><td><b>1056</b></td></tr> <tr> <td>Mounting interface</td><td>VESA 75, 100, 200 &amp; L&amp;S 3</td></tr> <tr> <td>Connectivity</td><td>Contact relay Optional wall switch &amp; IR/RF remote</td></tr> </table> <div>    </div>	Ref.	P3674 Single column lift	Dimensions in mm	W 400 x D 213 x H 585-1260	Nett stroke	<b>675</b>	Presentation height (centre screen)	<b>1056</b>	Mounting interface	VESA 75, 100, 200 & L&S 3	Connectivity	Contact relay Optional wall switch & IR/RF remote		
Ref.	P3674 Single column lift														
Dimensions in mm	W 400 x D 213 x H 585-1260														
Nett stroke	<b>675</b>														
Presentation height (centre screen)	<b>1056</b>														
Mounting interface	VESA 75, 100, 200 & L&S 3														
Connectivity	Contact relay Optional wall switch & IR/RF remote														
	<table> <tr> <th>Ref.</th><th>P5321 Single column lift</th></tr> <tr> <td>Dimensions in mm</td><td>W 860 x D 290 x H 880-1845</td></tr> <tr> <td>Nett stroke</td><td><b>965</b></td></tr> <tr> <td>Presentation height (centre screen)</td><td><b>1465</b></td></tr> <tr> <td>Max. mounting range in mm.</td><td>W 810 x H 446</td></tr> <tr> <td>Min. mounting range in mm.</td><td>W 130</td></tr> <tr> <td>Connectivity</td><td>Contact relay Optional wall switch &amp; IR/RF remote</td></tr> </table> <div>    </div>	Ref.	P5321 Single column lift	Dimensions in mm	W 860 x D 290 x H 880-1845	Nett stroke	<b>965</b>	Presentation height (centre screen)	<b>1465</b>	Max. mounting range in mm.	W 810 x H 446	Min. mounting range in mm.	W 130	Connectivity	Contact relay Optional wall switch & IR/RF remote
Ref.	P5321 Single column lift														
Dimensions in mm	W 860 x D 290 x H 880-1845														
Nett stroke	<b>965</b>														
Presentation height (centre screen)	<b>1465</b>														
Max. mounting range in mm.	W 810 x H 446														
Min. mounting range in mm.	W 130														
Connectivity	Contact relay Optional wall switch & IR/RF remote														
	<table> <tr> <th>Ref.</th><th>P5369 Double column lift</th></tr> <tr> <td>Dimensions in mm</td><td>W 860 x D 290 x H 880-1845</td></tr> <tr> <td>Nett stroke</td><td><b>965</b></td></tr> <tr> <td>Presentation height (centre screen)</td><td><b>1465</b></td></tr> <tr> <td>Max. mounting range in mm.</td><td>W 810 x H 446</td></tr> <tr> <td>Min. mounting range in mm.</td><td>W 130</td></tr> <tr> <td>Connectivity</td><td>Contact relay Optional wall switch &amp; IR/RF remote</td></tr> </table> <div>    </div>	Ref.	P5369 Double column lift	Dimensions in mm	W 860 x D 290 x H 880-1845	Nett stroke	<b>965</b>	Presentation height (centre screen)	<b>1465</b>	Max. mounting range in mm.	W 810 x H 446	Min. mounting range in mm.	W 130	Connectivity	Contact relay Optional wall switch & IR/RF remote
Ref.	P5369 Double column lift														
Dimensions in mm	W 860 x D 290 x H 880-1845														
Nett stroke	<b>965</b>														
Presentation height (centre screen)	<b>1465</b>														
Max. mounting range in mm.	W 810 x H 446														
Min. mounting range in mm.	W 130														
Connectivity	Contact relay Optional wall switch & IR/RF remote														
<p>Extra high version</p> 	<table> <tr> <th>Ref.</th><th>P5382 Quad column lift</th></tr> <tr> <td>Dimensions in mm</td><td>W 900 x D 450 x H 1088-3075</td></tr> <tr> <td>Nett stroke</td><td><b>1935</b></td></tr> <tr> <td>Presentation height (centre screen)</td><td><b>2664</b></td></tr> <tr> <td>Max. mounting range in mm.</td><td>W 810 x H 671</td></tr> <tr> <td>Min. mounting range in mm.</td><td>W 130</td></tr> <tr> <td>Connectivity</td><td>Contact relay Optional wall switch &amp; IR/RF remote</td></tr> </table> <div>    </div>	Ref.	P5382 Quad column lift	Dimensions in mm	W 900 x D 450 x H 1088-3075	Nett stroke	<b>1935</b>	Presentation height (centre screen)	<b>2664</b>	Max. mounting range in mm.	W 810 x H 671	Min. mounting range in mm.	W 130	Connectivity	Contact relay Optional wall switch & IR/RF remote
Ref.	P5382 Quad column lift														
Dimensions in mm	W 900 x D 450 x H 1088-3075														
Nett stroke	<b>1935</b>														
Presentation height (centre screen)	<b>2664</b>														
Max. mounting range in mm.	W 810 x H 671														
Min. mounting range in mm.	W 130														
Connectivity	Contact relay Optional wall switch & IR/RF remote														
	<table> <tr> <th>Ref.</th><th>FPL-7072E Single column lift</th></tr> <tr> <td>Dimensions in mm</td><td>W 400 x D 295 x H 1265-2315</td></tr> <tr> <td>Nett stroke</td><td><b>1050</b></td></tr> <tr> <td>Presentation height (centre screen)</td><td><b>1815</b></td></tr> <tr> <td>Mounting interface</td><td>VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400</td></tr> <tr> <td>Connectivity</td><td>Contact relay Optional wall switch &amp; IR/RF remote</td></tr> </table> <div>    </div>	Ref.	FPL-7072E Single column lift	Dimensions in mm	W 400 x D 295 x H 1265-2315	Nett stroke	<b>1050</b>	Presentation height (centre screen)	<b>1815</b>	Mounting interface	VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400	Connectivity	Contact relay Optional wall switch & IR/RF remote		
Ref.	FPL-7072E Single column lift														
Dimensions in mm	W 400 x D 295 x H 1265-2315														
Nett stroke	<b>1050</b>														
Presentation height (centre screen)	<b>1815</b>														
Mounting interface	VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400														
Connectivity	Contact relay Optional wall switch & IR/RF remote														
	<table> <tr> <th>Ref.</th><th>FPL-70E XL lift system</th></tr> <tr> <td>Dimensions in mm</td><td>W 900 x D 295 x H 1265-2315</td></tr> <tr> <td>Nett stroke</td><td><b>1050</b></td></tr> <tr> <td>Presentation height (centre screen)</td><td><b>1815</b></td></tr> <tr> <td>Mounting interface</td><td>VESA 400 x 400, 400 x 800</td></tr> <tr> <td>Connectivity</td><td>Contact relay Optional wall switch &amp; IR/RF remote</td></tr> </table> <div>    </div>	Ref.	FPL-70E XL lift system	Dimensions in mm	W 900 x D 295 x H 1265-2315	Nett stroke	<b>1050</b>	Presentation height (centre screen)	<b>1815</b>	Mounting interface	VESA 400 x 400, 400 x 800	Connectivity	Contact relay Optional wall switch & IR/RF remote		
Ref.	FPL-70E XL lift system														
Dimensions in mm	W 900 x D 295 x H 1265-2315														
Nett stroke	<b>1050</b>														
Presentation height (centre screen)	<b>1815</b>														
Mounting interface	VESA 400 x 400, 400 x 800														
Connectivity	Contact relay Optional wall switch & IR/RF remote														
	<table> <tr> <th>Ref.</th><th>FPL-90E</th></tr> <tr> <td>Dimensions in mm</td><td>W 400 x D 295 x H 1600-2900</td></tr> <tr> <td>Nett stroke</td><td><b>1300</b></td></tr> <tr> <td>Presentation height (centre screen)</td><td><b>2200</b></td></tr> <tr> <td>Mounting interface</td><td>VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400</td></tr> <tr> <td>Connectivity</td><td>Contact relay Optional wall switch &amp; IR/RF remote</td></tr> </table> <div>    </div>	Ref.	FPL-90E	Dimensions in mm	W 400 x D 295 x H 1600-2900	Nett stroke	<b>1300</b>	Presentation height (centre screen)	<b>2200</b>	Mounting interface	VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400	Connectivity	Contact relay Optional wall switch & IR/RF remote		
Ref.	FPL-90E														
Dimensions in mm	W 400 x D 295 x H 1600-2900														
Nett stroke	<b>1300</b>														
Presentation height (centre screen)	<b>2200</b>														
Mounting interface	VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400														
Connectivity	Contact relay Optional wall switch & IR/RF remote														



## POP UP LIFT SYSTEMS

## HIGH END POP UP LIFT SYSTEMS

Options:

Electric rotation: **R**Electric opening hatch: **H**Power supply: **230 VAC 50-60 Hz/24 VDC****Ref.****FPL-A**

Dimensions in mm

W 920 x D 185 x H 700

Max. flat panel dimensions in mm\*

W 800 x D 100 x H 550

Nett stroke in mm

**550**

Wider model

**FPL-A1** (Max. screen width W 1000 mm)

\* The actual max. screen inches are determined by the "max. screen width" limits.

**Ref.****FPL-B**

Dimensions in mm

W 1210 x D 185 x H 930

Max. flat panel dimensions in mm\*

W 1090 x D 100 x H 780

Nett stroke in mm

**780**

Wider model

**FPL-B1** (Max. screen width W 1290 mm)

\* The actual max. screen inches are determined by the "max. screen width" limits.

**Ref.****FPL-C**

Dimensions in mm

W 1375 x D 185 x H 1005

Max. flat panel dimensions in mm\*

W 1255 x D 100 x H 855

Nett stroke in mm

**855**

Wider model

**FPL-C1** (Max. screen width W 1455 mm)

\* The actual max. screen inches are determined by the "max. screen width" limits.



## ACCESSORIES

## CONNECTIVITY

High end pop up lift systems:



Lift + hatch

1 receiver, 1 transmitter

Lift + rotation


2 receivers, 1 transmitter

Lift + rotation + hatch

2 receivers, 1 transmitter

**Ref.****260214**Description  
Suitable forIR remote (internal)  
High end pop up lift systems**260215**RF remote (internal)  
High end pop up lift systems**260218**IR remote (external)  
Telescopic lift systems**260219**RF remote (external)  
Telescopic lift systems**460286**RF remote  
P3674, P5321, P5369, P5382**261318**Wall switch  
Telescopic lift systems

## FLAT PANEL COLUMN, TO MOUNT THE FLAT PANEL

**Ref.**

Suitable for

**P3069**

A, A1

**P3079**

B, B1

**P3089**

C, C1

## ANTI-PINCHING SAFETY SET

**Ref.**

Suitable for

**P3306**

A, A1

B, B1

C, C1



# ***Artwork and Panel***

## ***lift systems***

***Artwork and panel lift systems,***

*offer you the most flexible way to lift your artwork or even a wall panel and reveals your screen.*




**Audipack®**

*It's great to have solutions...*



# Reveal your TV by lifting your artwork



**Artwork lift systems** are innovative solutions that makes it possible to install your art work and your flat screen at the same position. With just the push on a button the art work silently moves upwards and shows your flat panel only when needed.

This product is very easy to adapt and custom models are available.

## ARTWORK LIFT SYSTEM



### Ref. **AWL-750**

Dimensions in mm. W 380 x D 130 x H 205

Max. load 15 Kg

Stroke in mm 750

Max. artwork dimensions H 1100

Connectivity Contact relay, RS-232

Optional IR remote **260214**, RF remote **260215**, wall switch **261318**

Max. °  
50

RS-232

### Ref. **AWL-1000**

Dimensions in mm. W 380 x D 130 x H 205

Max. load 15 Kg

Stroke in mm 1000

Max. artwork dimensions H 1325


Connectivity Contact relay, RS-232

Optional IR remote **260214**, RF remote **260215**, wall switch **261318**

Max. °  
65


RS-232

# Reveal your TV by lifting a furniture panel



**The panel lift system** is integrated in the furniture and makes it possible to hide the flat panel behind a cabinet panel. When activating the system the panel recesses backwards and then slides upwards or downwards and reveals your screen.

## PANEL LIFT SYSTEM



### Ref. **WPL-1V**

Dimensions in mm. W 1100 x D 140 x H 1235

Max. load 25 Kg

Stroke in mm 830 (Vertical)

50 (Depth)

Connectivity Contact relay, RS-232

Optional IR remote **260214**, RF remote **260215**, wall switch **261318**

Max. °  
60

RS-232

▲ **Automatic panel retract and lift mechanism**

▲ **Silent motor drive**

▲ **No visible components when opened**

# ***Liftomatic®***

## ***rental systems***

***The revolutionary flat panel Liftomatic®,***

*an all in one solution. The system lifts the flat panel out of a flightcase, retracts the wheels and lifts the screen to the correct presentation height.*

*There is no better solution!*



**Audipack®**

*It's great to have solutions...*



# Stand above the crowd with

## the Audipack **Liftomatic®**



**Protect your equipment by using the Audipack Liftomatic flat panel lifting range.**

The flat panel Liftomatic® is an all in one transport and presentation solution for screens up to 120"

Audipack offers two types of Liftomatic® systems;

**Flightcase Liftomatic®** systems. This flightcase with built-in telescopic lift system accommodates flat panels with a diagonal up to 65 inch. With just the push of a button your screen rises to a presentation height of 1800 mm (centre screen). Inside the flightcase is a big accessory compartment. As option there is a cover plate to cover the top of the flightcase in open position during use.

**The Audipack Liftomatic®**, this lift system is available up to 120 inch and can be transported in an optional flightcase. The complete system, including the flat panel, can be transported in an optional Audipack flightcase. Simply open the front of the flightcase, activate the integrated wheel system and the Liftomatic with pre-mounted screen raises itself from the flightcase. Then you simply roll out the system out of the flightcase and place it in position. After placing the system in position you can retract the wheels and lift the screen to presentation position.

- ▲ **One man floor operation**
- ▲ **Invisible lift mechanism**
- ▲ **Electrical or manual retractable wheels**
- ▲ **Available in various presentation heights**



*Audipack also engineers and manufactures custom rental systems for the easy transportation and set up of LED and OLED walls. The high tech components and intuitive controls minimise the need for tools or the handling of products.*

Flightcase Liftomatic®



All in one transport and presentation solution

Flightcase Liftomatic®



Available with optional cover plate

Liftomatic®



Manual screen rotation

Liftomatic®



Transport mode in flightcase


**UNIVERSAL FLIGHTCASE LIFTOMATIC® SYSTEMS, A PERFECT RENTAL SYSTEM**Power supply: **230 VAC 50-60 Hz**

For screen installation, an Audipack bracket is required.  
See page 43 for the available brackets

Ref.	FLM-4042		
Flightcase dimensions in mm	W 1080 x D 500 x H 970	Max. °	Max. 42
Max. flat panel dimensions in mm	W 980 x H 650	Max. 75	
Presentation height (centre screen)	1800 mm		
Mounting interface	L&S 5		
Ref.	FLM-4650		
Flightcase dimensions in mm	W 1280 x D 500 x H 970	Max. °	Max. 50
Max. flat panel dimensions in mm	W 1160 x H 700	Max. 75	
Presentation height (centre screen)	1800 mm		
Mounting interface	L&S 5		
Ref.	FLM-5255		
Flightcase dimensions in mm	W 1450 x D 500 x H 970	Max. °	Max. 55
Max. flat panel dimensions in mm	W 1350 x H 810	Max. 75	
Presentation height (centre screen)	1800 mm		
Mounting interface	L&S 5		

**FLIGHTCASE LIFTOMATIC® SYSTEMS, A PERFECT RENTAL SYSTEM**Power supply: **230 VAC 50-60 Hz**

Extra high version

Power supply: **230 VAC 50-60 Hz**

Ref.	FLM-5321		
Flightcase dimensions in mm	depends on screen size	Max. °	Max. 55
Presentation height (centre screen)	1890 mm	Max. 50	
Max. mounting range in mm.	W 810 x H 446		
Built-in lift system	P5321 <u>single</u> column lift, page 99		
Ref.	FLM-5369		
Flightcase dimensions in mm	depends on screen size	Max. °	Max. 65
Presentation height (centre screen)	1890 mm	Max. 100	
Max. mounting range in mm.	W 810 x H 446		
Built-in lift system	P5369 <u>double</u> column lift, page 99		
Ref.	FLM-5174		
Flightcase dimensions in mm	depends on screen size	Max. °	Max. 65
Presentation height (centre screen)	2820 mm.	Max. 100	
Built-in lift system	P5382 <u>quad</u> column lift, page 99		

*Flightcases are available in different colours with optional logo prints.  
See page 181 for more flightcase options.*

**LIFTOMATIC® WITH RETRACTABLE WHEEL SYSTEM, IDEAL FOR STUDIO USE**

For screen installation, an Audipack bracket is required.  
See page 43 for the available brackets

Ref.	FSW-W85		
Dimensions in mm	W 900 x D 700 x H 1875-1971	Max. °	Max. 90
Presentation height (centre screen)	Continuously adjustable	Max. 100	
Wheel adjustment in mm	95,5		
Mounting interface	L&S 5		
Power supply	230 VAC 50-60 Hz		
Ref.	FSW-W85E		
Dimensions in mm	W 900 x D 700 x H 1875-1971	Max. °	Max. 90
Presentation height (centre screen)	approx 1000 - 1600 mm	Max. 100	
Wheel adjustment in mm	95,5		
Mounting interface	L&S 5		
Power supply	230 VAC 50-60 Hz		

- ▲ **Perfect studio unit**
- ▲ **High grade finishing**
- ▲ **Adjustable presentation height**
- ▲ **Electric retractable wheels**

## LIFTOMATIC® RENTAL SYSTEMS

## LIFTOMATIC® SYSTEMS

Power supply: 230 VAC 50-60 Hz

**Ref.****P5168**

System dimensions in mm	W 1190 x D 670 x H 1470-1670
Presentation height (centre screen)	2000 mm
Nett weight	140 Kg
Screen rotation	-90°/+90°

*Easily open the flightcase and drive out your Flat panel Liftomatic with screen.***Ref.****P3559**

System dimensions in mm	W 1364 x D 861 x H 1808-1992
Presentation height (centre screen)	2110 mm
Nett weight	225 Kg
Screen rotation	-90°/+90°

*Easily open the flightcase and drive out your Flat panel Liftomatic with screen.*

## ACCESSORIES


## FLIGHTCASES

Simply open the flightcase and drive in your Flat panel Liftomatic with screen.

- Standard models available with integrated accessory cabinet
- L-shaped models available

*Custom made for every screen size and available in several colours*

## MOUNTING FRAMES



**Ref.**  
Mounting interface  
Suitable for



**P5299**  
VESA 800 x 400, 800 x 200, 600 x 200, 400 x 400  
Several screens with VESA



**P5306**  
1400 x 800, 900 x 800 mm  
Samsung 820 DXN



**P5232**  
Panasonic TH-85PF12

## COVER PLATE



**Ref.**  
Suitable for



**P4270**  
FLM-4042

**P4271**  
FLM-4650

**P4272**  
FLM-5255

# ***Indoor housings***

***for flat panels***

*The indoor housings are the perfect way to protect and brand your flat panel*




**Audipack®**

*It's great to have solutions...*



# Screens

## in *public places*

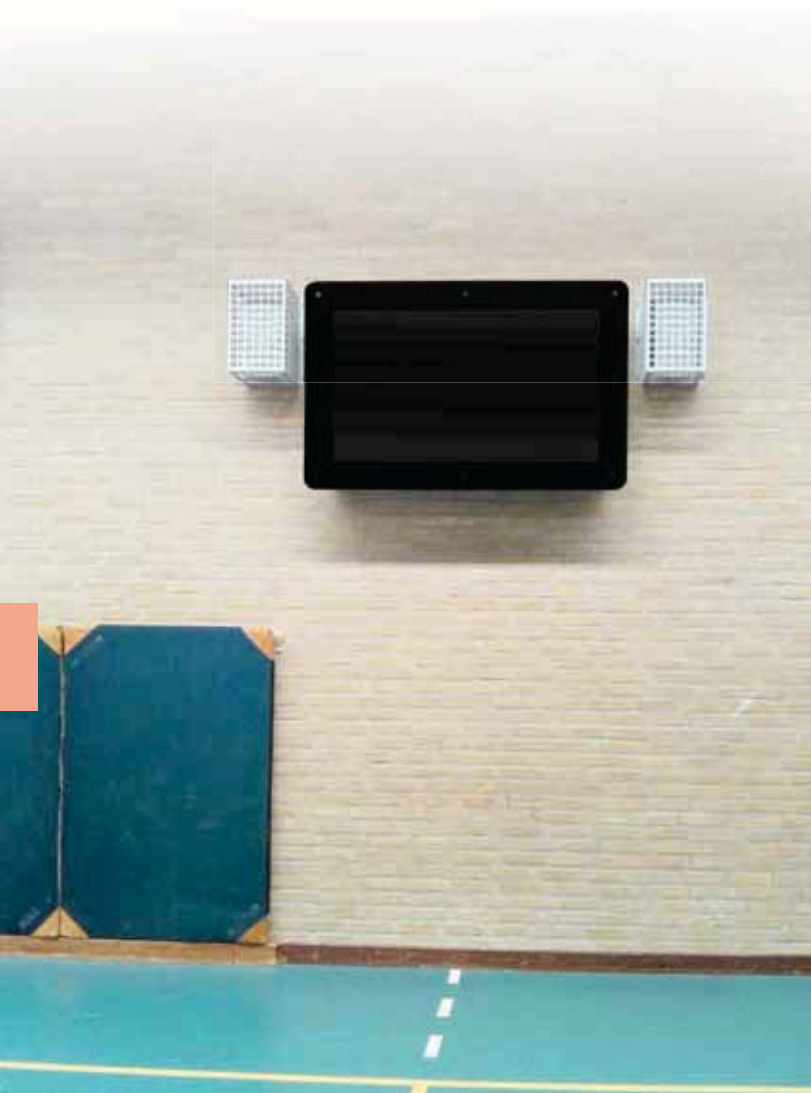

**Screens mounted in public places demand protective solutions.**

The Audipack lockable indoor housings offer heavy-duty protection for the flat panel, and a sleek, modern look that does not detract from the screen content.

**The indoor theft delay housing** is a security housing for digital signage projects. A fully removable front with hardened glass protects the monitor.

It is available in portrait or landscape models.


The stylish glass front is made from polished, coated and hardened glass and the housing also offers internal space for equipment such as players and switches.

**Slim-line indoor theft delay housings** are also available for LCD and LED screens with a reduction in depth of 50% to complement thinner panels.

- ▲ **Suitable for any brand and type of flat panel**
- ▲ **Very easy installation**
- ▲ **Easy equipment and flat panel access**
- ▲ **Available in Any RAL colour and finishing**



(FSMT-70) The flat panel is very easy accessible



High level finishing



Easy access after unlocking the glass front



Optional available in any RAL colour

## Slim-line THEFT DELAY HOUSINGS

For screens up to 75 mm. depth

Max. brightness: 700 cd/m<sup>2</sup>

**IP 30**



Colour: **Black bezel, white housing, glass front**

	Landscape	Portrait		
<b>Ref.</b>	<b>FSMT-32S</b>	<b>FSMT-32SP</b>		Max. " 32
Max. screen size	W x D 75 x H	W x D 75 x H		
<b>Ref.</b>	<b>FSMT-40S</b>	<b>FSMT-40SP</b>		Max. " 40
Max. screen size	W 990 x D 75 x H 600	W 600 x D 75 x H 990		
<b>Ref.</b>	<b>FSMT-42S</b>	<b>FSMT-42SP</b>		Max. " 42
Max. screen size	W 1035 x D 75 x H 625	W 625 x D 75 x H 1035		
<b>Ref.</b>	<b>FSMT-46S</b>	<b>FSMT-46SP</b>		Max. " 46
Max. screen size	W 1120 x D 75 x H 675	W 675 x D 75 x H 1120		
<b>Ref.</b>	<b>FSMT-47S</b>	<b>FSMT-47SP</b>		Max. " 47
Max. screen size	W 1145 x D 75 x H 690	W 690 x D 75 x H 1145		
<b>Ref.</b>	<b>FSMT-49S</b>	<b>FSMT-49SP</b>		Max. " 49
Max. screen size	W 1200 x D 75 x H 710	W 710 x D 75 x H 1200		
<b>Ref.</b>	<b>FSMT-50S</b>	<b>FSMT-50SP</b>		Max. " 50
Max. screen size	W 1210 x D 75 x H 725	W 725 x D 75 x H 1210		
<b>Ref.</b>	<b>FSMT-55S</b>	<b>FSMT-55SP</b>		Max. " 55
Max. screen size	W 1320 x D 75 x H 785	W 785 x D 75 x H 1320		
<b>Ref.</b>	<b>FSMT-60S</b>	<b>FSMT-60SP</b>		Max. " 60
Max. screen size	W 1435 x D 75 x H 855	W 855 x D 75 x H 1435		
<b>Ref.</b>	<b>FSMT-65S</b>	<b>FSMT-65SP</b>		Max. " 65
Max. screen size	W 1530 x D 75 x H 905	W 905 x D 75 x H 1530		

## CLASSIC THEFT DELAY HOUSINGS

Max. brightness: 700 cd/m<sup>2</sup>

Optional: non-reflective glass bezel

**IP 30**



Colour: **Black bezel, white housing glass front**

	Landscape	Portrait		
<b>Ref.</b>	<b>FSMT-32</b>	<b>FSMT-32P</b>		Max. " 32
Max. screen size	W x D 150 x H	W x D 150 x H		
<b>Ref.</b>	<b>FSMT-40</b>	<b>FSMT-40P</b>		Max. " 40
Max. screen size	W 990 x D 150 x H 600	W 600 x D 150 x H 990		
<b>Ref.</b>	<b>FSMT-42</b>	<b>FSMT-42P</b>		Max. " 42
Max. screen size	W 1035 x D 150 x H 625	W 625 x D 150 x H 1035		
<b>Ref.</b>	<b>FSMT-46</b>	<b>FSMT-46P</b>		Max. " 46
Max. screen size	W 1120 x D 150 x H 675	W 675 x D 150 x H 1120		
<b>Ref.</b>	<b>FSMT-47</b>	<b>FSMT-47P</b>		Max. " 47
Max. screen size	W 1145 x D 150 x H 690	W 690 x D 150 x H 1145		
<b>Ref.</b>	<b>FSMT-49</b>	<b>FSMT-49P</b>		Max. " 49
Max. screen size	W 1200 x D 150 x H 710	W 710 x D 150 x H 1200		
<b>Ref.</b>	<b>FSMT-50</b>	<b>FSMT-50P</b>		Max. " 50
Max. screen size	W 1210 x D 150 x H 725	W 725 x D 150 x H 1210		
<b>Ref.</b>	<b>FSMT-55</b>	<b>FSMT-55P</b>		Max. " 55
Max. screen size	W 1320 x D 150 x H 785	W 785 x D 150 x H 1320		
<b>Ref.</b>	<b>FSMT-60</b>	<b>FSMT-60P</b>		Max. " 65
Max. screen size	W 1435 x D 150 x H 855	W 855 x D 150 x H 1735		
<b>Ref.</b>	<b>FSMT-65</b>	<b>FSMT-65P</b>		Max. " 70
Max. screen size	W 1530 x D 150 x H 905	W 905 x D 150 x H 1530		
<b>Ref.</b>	<b>FSMT-70</b>	<b>FSMT-70P</b>		Max. " 72
Max. screen size	W 1645 x D 135 x H 975	W 975 x D 135 x H 1645		
<b>Ref.</b>	<b>FSMT-72</b>	<b>FSMT-72P</b>		Max. " 75
Max. screen size	W 1720 x D 135 x H 1050	W 1050 x D 135 x H 1720		
<b>Ref.</b>	<b>FSMT-75</b>	<b>FSMT-75P</b>		Max. " 80
Max. screen size	W 1720 x D 135 x H 1050	W 1050 x D 135 x H 1720		
<b>Ref.</b>	<b>FSMT-80</b>	<b>FSMT-80P</b>		Max. " 80
Max. screen size	W 1865 x D 135 x H 1150	W 1150 x D 135 x H 1865		



## ACCESSORIES

### UNIFLATFIX PRO (UNIVERSAL FLAT PANEL BRACKETS)



Lock the bracket with the optional lock  
Ref.: 230052



**UFPRO-V400**  
W 430 x D 6 x H 430  
W 400 x H 400  
W 100 x 100



**UFPRO-0500**  
W 516 x D 32 x H 382  
W 470 x H 360  
W 125

**UFPRO-0700**  
W 716 x D 32 x H 502  
W 670 x H 446  
W 125

**UFPRO-0800**  
W 860 x D 32 x H 502  
W 810 x H 446  
W 130

**UFPRO-0801**  
W 860 x D 39 x H 727  
W 810 x H 671  
W 120



### THEFT DELAY WALL MOUNTS



Mount	FSMI	FSMT	FSMT-S	
<b>P2691</b>	Range 32" - 70"	Range 32" - 70"	Range 40" - 70"	
<b>P5925</b>	40"P	40"P / 42"P	40"P	
<b>P6441</b>	Range 72"- 80"	Range 72"- 80"	Range 72"- 80"	

### CEILING MOUNTS



Custom ceiling mount length available on request

**Ref.**  
Tube length

**FSM-CM600**  
600 mm

**FSM-CM1000**  
1000 mm

### AIRCURTAIN (PREVENTS HEAT BUILD-UP BETWEEN WINDOW AND FLAT PANEL)



**Ref.**  
Width

**ACG-750AC**  
750 mm



# Outdoor housings

*for flat panels*

## **The Audipack outdoor housings**

*The Audipack outdoor solutions finish and protects flat panels in outdoor applications*



**Audipack®**

*It's great to have solutions...*

# Flat panels in open areas, and public places



Flat panels being used more often for media systems in public spaces and outside areas, and need to be protected against the climate and vandalism. Audipack's flat panel housings enclose the panel in a sturdy, durable and easy to mount metal housing with a safety glass front.

The front of the housing is locked, opened with a unique key for maintenance and installation. Available with standard or custom built mounting accessories.

**The standard outdoor housings** are equipped with:

- thermostatically controlled ventilation and heating system
- safety glass
- replaceable filters

The standard active ventilation and heating system reduces condensation inside the housing, with Ip rating IP55.

**The high brightness outdoor housings** are equipped with:

- thermostatically controlled ventilation and heating system
- safety glass
- airconditioning (needed for high brightness screens)

Ip rating IP55.

Portrait and landscape position housing are available as standard, for any screen size.

- ▲ **Suitable for any brand and type of flat panel**
- ▲ **Very easy installation**
- ▲ **Easy equipment and flat panel access**
- ▲ **Available in Any RAL colour and finishing**
- ▲ **Landscape and portrait models available**



(FSMO-70) The flat panel is very easy accessible



High level finishing



Easy access after unlocking the glass front



Optional available in any RAL colour



## OUTDOOR HOUSINGS

Max. brightness: **700 cd/m<sup>2</sup>**  
 Max. surrounding temp. **-20°C to +30°C\***

**Optional: non-reflective glass bezel**  
**Standard colour black RAL 9005**  
**Suitable for Shady environments**



**IP 55**



	Landscape	Portrait	
<b>Ref.</b>	<b>FSMO-32</b>	<b>FSMO-32P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	32
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 800 x D 150 x H 500	W 500 x D 150 x H 800	
<b>Ref.</b>	<b>FSMO-40</b>	<b>FSMO-40P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	40
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 990 x D 150 x H 600	W 600 x D 150 x H 990	
<b>Ref.</b>	<b>FSMO-42</b>	<b>FSMO-42P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	42
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1035 x D 150 x H 625	W 625 x D 150 x H 1035	
<b>Ref.</b>	<b>FSMO-46</b>	<b>FSMO-46P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	46
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1120 x D 150 x H 675	W 675 x D 150 x H 1120	
<b>Ref.</b>	<b>FSMO-47</b>	<b>FSMO-47P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	47
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1145 x D 150 x H 690	W 690 x D 150 x H 1145	
<b>Ref.</b>	<b>FSMO-49</b>	<b>FSMO-49P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	49
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1200 x D 150 x H 710	W 710 x D 150 x H 1200	
<b>Ref.</b>	<b>FSMO-50</b>	<b>FSMO-50P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	50
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1210 x D 150 x H 725	W 725 x D 150 x H 1210	
<b>Ref.</b>	<b>FSMO-55</b>	<b>FSMO-55P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	55
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1320 x D 150 x H 785	W 785 x D 150 x H 1320	
<b>Ref.</b>	<b>FSMO-60</b>	<b>FSMO-60P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	60
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1435 x D 150 x H 855	W 855 x D 150 x H 1435	
<b>Ref.</b>	<b>FSMO-65</b>	<b>FSMO-65P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	65
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1530 x D 150 x H 905	W 905 x D 150 x H 1530	
<b>Ref.</b>	<b>FSMO-70</b>	<b>FSMO-70P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	70
Mounting interface	Vesa 400 & L&S 5	Vesa 400 & L&S 5	
Max. screen size	W 1645 x D 135 x H 975	W 975 x D 135 x H 1645	
<b>Ref.</b>	<b>FSMO-72</b>	<b>FSMO-72P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	72
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1720 x D 135 x H 1050	W 1050 x D 135 x H 1720	
<b>Ref.</b>	<b>FSMO-75</b>	<b>FSMO-75P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	75
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1720 x D 135 x H 1050	W 1050 x D 135 x H 1720	
<b>Ref.</b>	<b>FSMO-80</b>	<b>FSMO-80P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	80
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1865 x D 135 x H 1150	W 1150 x D 135 x H 1865	
<b>Ref.</b>	<b>FSMO-85</b>	<b>FSMO-85P</b>	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	85
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1985 x D 135 x H 1160	W 1160 x D 135 x H 1985	

\*The housing is intended to use the surrounding air for ventilation; the surrounding air may not exceed the allowed working temperature of the flat panel.

## OUTDOOR HOUSINGS

## Slim-line OUTDOOR HOUSINGS

For screens up to 75 mm. depth

Max. brightness: **700 cd/m<sup>2</sup>**Max. surrounding temp. **-20°C to +30°C\***

**Optional: non-reflective glass bezel**  
**Standard colour black RAL 9005**  
**Suitable for Shady environments**

**IP 55**

	Landscape	Portrait	
<b>Ref.</b>	<b>FSMO-32S</b>	<b>FSMO-32SP</b>	Max. " <b>32</b>
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 800 x D 75 x H 500	W 500 x D 75 x H 800	
<b>Ref.</b>	<b>FSMO-40S</b>	<b>FSMO-40SP</b>	Max. " <b>40</b>
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 990 x D 75 x H 600	W 600 x D 75 x H 990	
<b>Ref.</b>	<b>FSMO-42S</b>	<b>FSMO-42SP</b>	Max. " <b>42</b>
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1035 x D 75 x H 625	W 625 x D 75 x H 1035	
<b>Ref.</b>	<b>FSMO-46S</b>	<b>FSMO-46SP</b>	Max. " <b>46</b>
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1120 x D 75 x H 675	W 675 x D 75 x H 1120	
<b>Ref.</b>	<b>FSMO-47S</b>	<b>FSMO-47SP</b>	Max. " <b>47</b>
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1145 x D 75 x H 690	W 690 x D 75 x H 1145	
<b>Ref.</b>	<b>FSMO-49S</b>	<b>FSMO-49SP</b>	Max. " <b>49</b>
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1200 x D 75 x H 710	W 710 x D 75 x H 1200	
<b>Ref.</b>	<b>FSMO-50S</b>	<b>FSMO-50SP</b>	Max. " <b>50</b>
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1210 x D 75 x H 725	W 725 x D 75 x H 1210	
<b>Ref.</b>	<b>FSMO-55S</b>	<b>FSMO-55SP</b>	Max. " <b>55</b>
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1320 x D 75 x H 785	W 785 x D 75 x H 1320	
<b>Ref.</b>	<b>FSMO-60S</b>	<b>FSMO-60SP</b>	Max. " <b>60</b>
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1435 x D 75 x H 855	W 855 x D 75 x H 1435	
<b>Ref.</b>	<b>FSMO-65S</b>	<b>FSMO-65SP</b>	Max. " <b>65</b>
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1530 x D 75 x H 905	W 905 x D 75 x H 1530	





## OUTDOOR HOUSINGS FOR 2000 NIT AND MORE LANDSCAPE

## PORTRAIT

Brightness: 2000 cd/m<sup>2</sup> and more**IP 65**

Max. surrounding temp. -20°C to +30°C



Suitable for full sunlight



Ref.	FSMO-46HBV	FSMO-46HBVP	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	46
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-47HBV*	FSMO-47HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	47
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-49HBV*	FSMO-49HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	49
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-55HBV*	FSMO-55HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	55
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-60HBV*	FSMO-60HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	60
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-65HBV*	FSMO-65HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	65
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-72HBV*	FSMO-72HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	72
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-75HBV*	FSMO-75HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	75
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	

\* For these models refer to price list or website for brand related active ventilated monitor brackets.

## OUTDOOR HOUSINGS

## OUTDOOR HOUSINGS WITH AIR CONDITIONING FOR HIGH BRIGHTNESS SCREENS

Max. brightness: **1500 cd/m<sup>2</sup>****IP 65**Max. surrounding temp. **-20°C to +35°C****Suitable for full sunlight****Ref.**

Colour  
Mounting interface  
Dimensions in mm  
Power consumption  
Power supply  
Optional

**FSMO-46HB\***

Black bezel, white housing  
L&S 5  
W 1580 x D 282 x H 830  
600 Watt  
230 VAC 50-60 Hz  
non reflective glass bezel

Max. "

46

**Ref.**

Colour  
Mounting interface  
Dimensions in mm  
Power consumption  
Power supply  
Optional

**FSMO-52HB\***

Black bezel, white housing  
L&S 5  
W 1810 x D 282 x H 951  
600 Watt  
230 VAC 50-60 Hz  
non reflective glass bezel

Max. "

52

\* For these models refer to price list or website for brand related active ventilated monitor brackets.

## ACCESSORIES

## UNIPLATFIX PRO (UNIVERSAL FLAT PANEL BRACKETS)



Lock the bracket with the optional lock  
**Ref.: 230052**

Max.  
85**Ref.**

Dimensions in mm  
Max. mounting range in mm  
Min. mounting range in mm

**UFPRO-V400**

W 430 x D 6 x H 430  
W 400 x H 400  
W 100 x 100

**UFPRO-0500**

W 516 x D 32 x H 382  
W 470 x H 360  
W 125

**UFPRO-0700**

W 716 x D 32 x H 502  
W 670 x H 446  
W 125

**UFPRO-0800**

W 860 x D 32 x H 502  
W 810 x H 446  
W 130

**UFPRO-0801**

W 860 x D 39 x H 727  
W 810 x H 671  
W 120

## THEFT DELAY WALL MOUNTS



## Mount

## FSMO

## FSMO S

## FSMO-HBV

## FSMO-HB

**P2691**

Range 40" - 70"

Range 40"- 65"S

55"/65"/65"P

52"

**P5502**

32"

32"

**P5569**

32"P

32"P

**P5925**

40"P

40"P

32"

**P5984**

46"/47"/55"P

**P6121**

55"P

**P6135**

55"P

46"

**P6331**

60"P/65"P

60"/60"P

**P6441**

Range 72"- 75"

70"-75"/72"P-75"P

**P7066**

80"/85"

**P7167**

46"P/47"P

## CEILING MOUNTS



Custom ceiling mount length available on request

**Ref.**

Tube length

**FSM-CM600**

600 mm

**FSM-CM1000**

1000 mm

# Presentation

## kiosks and displays

*The Audipack presentation display is the ideal solution for an elegant, professional infotainment system*

*A perfect solution for every environment available in Indoor, outdoor and landscape models.*



**Audipack®**

*It's great to have solutions.*



Let your **message** speak for itself

with the **Eye-Point®!**



**The Outdoor Eye-points®** are practical and beautiful. These slim built and neatly finished kiosks are available for 46" high brightness screens, and on request are available for any type and size.

- Safety glass front
- Swivelling flat panel arm for easy equipment access
- Suitable for any weather conditions

Thanks to the extensive choice of materials, colours and wrappings, the Eye-Point is applicable in any environment and situation.

- ▲ **Indoor and outdoor versions**
- ▲ **Available for many screen sizes**
- ▲ **Glass or open versions**
- ▲ **Custom colour designed**



All models integrated quick-installation L&S5 swivelling arm



Glass version


**With its new-age design,**

the Eye-Point® is a flexible, mobile presentation display that clearly communicates your message or information to your audience. The modern looks and distinguished design are at home in any environment – from the showroom to the supermarket. The flat panel is hidden and protected by the neatly assembled, strong casing.

The product serves the needs of you and your customers. The system achieves a high level of interactivity thanks to the built in digital signage software.

**The indoor Eye-Points®** are available for flat panel displays from 40" to 65" in both portrait and landscape orientation and are equipped with:

- Lockable castors
- Safety glass front
- Swiveling flat panel arm for easy equipment access

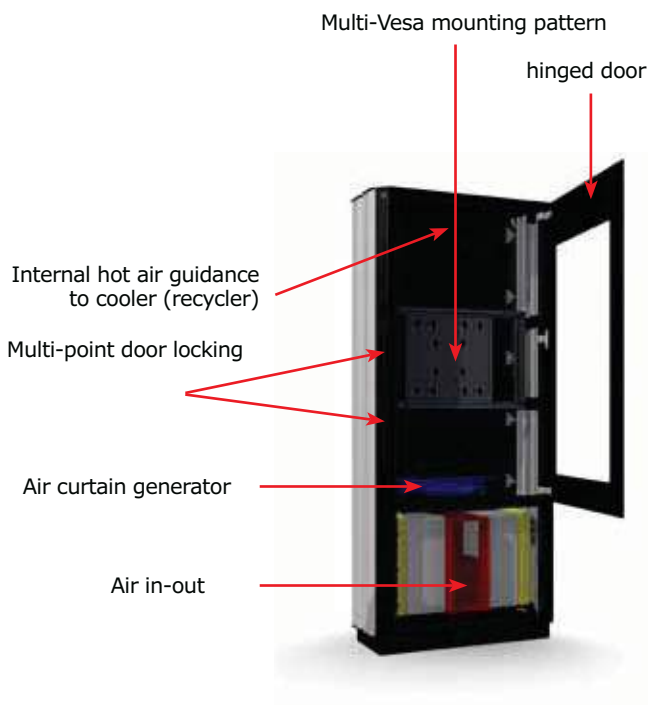













#### **FOD-60HBD product explanation**

Outdoor display suitable for 2 pieces 60" high brightness screens. Both display sides back to back installed and are accessible through the locked upper hinged glass doors.








**EYE-POINT® INDOOR****Glass**Max. brightness: **700 cd/m2****IP 40**



Ref.	P3960	
Dimensions in mm	W 915 x D 600 x H 1800	  <div>Max. ° 40</div>
Max. flat panel in mm	W 606 x D 150 x H 1013	
Ref.	P3899	
Dimensions in mm	W 915 x D 600 x H 1800	  <div>Max. ° 42</div>
Max. flat panel in mm	W 643 x D 150 x H 1050	
Ref.	P3961	
Dimensions in mm	W 975 x D 650 x H 1885	  <div>Max. ° 46</div>
Max. flat panel in mm	W 693 x D 150 x H 1139	
Ref.	P3963	
Dimensions in mm	W 1040 x D 650 x H 1985	  <div>Max. ° 50</div>
Max. flat panel in mm	W 731 x D 150 x H 1234	
Ref.	P3965	
Dimensions in mm	W 1100 x D 700 x H 2080	  <div>Max. ° 55</div>
Max. flat panel in mm	W 793 x D 150 x H 1345	
Ref.	P3967	
Dimensions in mm	W 1200 x D 750 x H 2230	  <div>Max. ° 65</div>
Max. flat panel in mm	W 930 x D 150 x H 1559	

**FPD INDOOR PRESENTATION DISPLAY****Glass****Open****NEW**Max. brightness: **700 cd/m2**

- FPD-P with safety glass front
- FPD-PO with open bezel
- Swivelling flat panel arm for easy equipment access

Ref.	FPD-46P	FPD-46PO	
Dimensions in mm	W 830 x D 165 x H 2035	W 830 x D 165 x H 2035	 <div>Max. ° 46</div>
Max. flat panel in mm	W 675 x D 75 x H 1145	W 675 x D 75 x H 1145	
Presentation height in mm	1400 (center screen)	1400 (center screen)	
Ref.	FPD-47P	FPD-47PO	
Dimensions in mm	W 845 x D 165 x H 2060	W 845 x D 165 x H 2060	 <div>Max. ° 47</div>
Max. flat panel in mm.	W 690 x D 75 x H 1145	W 690 x D 75 x H 1145	
Presentation height in mm	1435 (center screen)	1435 (center screen)	
Ref.	FPD-55P	FPD-55PO	
Dimensions in mm	W 940 x D 165 x H 2235	W 940 x D 165 x H 2235	 <div>Max. ° 55</div>
Max. flat panel in mm.	W 785 x D 75 x H 1320	W 785 x D 75 x H 1320	
Presentation height in mm	1500 (center screen)	1500 (center screen)	
Ref.	FPD-60P	FPD-60PO	
Dimensions in mm	W 1010 x D 165 x H 2350	W 1010 x D 165 x H 2350	 <div>Max. ° 60</div>
Max. flat panel in mm.	W 855 x D 75 x H 1435	W 855 x D 75 x H 1435	
Presentation height in mm	1550 (center screen)	1550 (center screen)	
Ref.	FPD-65P	FPD-65PO	
Dimensions in mm	W 1065 x D 165 x H 2450	W 1065 x D 165 x H 2450	 <div>Max. ° 65</div>
Max. flat panel in mm.	W 905 x D 75 x H 1320	W 905 x D 75 x H 1320	
Presentation height in mm	1605 (center screen)	1605 (center screen)	

**EYE-POINT® LANDSCAPE INDOOR****Glass**Max. brightness: **700 cd/m2****IP 40**

Ref.	P3968	
Dimensions in mm	W 1326 x D 299 x H 1728	  <div>Max. ° 42</div>
Max. flat panel in mm	W 1050 x D 150 x H 643	
Mounting interface	L&S 5	

**EYE-POINT® OUTDOOR HIGH BRIGHTNESS**Max. brightness: **1500 cd/m2****IP 55**

Rear view



Light sensor

Ref.	FOD-46HB	FOD-46HBD		
Dimensions in mm	W 996 x D 313 x H 2250	W 996 x D 480 x H 2250		Max. ° 46
Max. flat panel in mm	W 700 x D 150 x H 1120	W 700 x D 150 x H 1120		
Mounting interface	L&S 5	2 x VESA + L&S 5		
Power consumption	610 Watt	1300 Watt		
Power supply	230 VAC 50-60Hz	230 VAC 50-60Hz		
Max. surrounding temp.	<b>-20°C to +35°C</b>	<b>-20°C to +35°C</b>		
Ref.	FOD-47HB	FOD-47HBD		
Dimensions in mm	W 996 x D 313 x H 2250	W 996 x D 480 x H 2250		Max. ° 47
Max. flat panel in mm	W 700 x D 150 x H 1120	2 x W 700 x D 150 x H 1120		
Mounting interface	L&S 5	2 x VESA + L&S 5		
Power consumption	610 Watt	1300 Watt		
Power supply	230 VAC 50-60Hz	230 VAC 50-60Hz		
Max. surrounding temp.	<b>-20°C to +35°C</b>	<b>-20°C to +35°C</b>		
Ref.	FOD-49HB	FOD-49HBD		
Dimensions in mm	W x D 313 x H	W x D 480x H		Max. ° 49
Max. flat panel in mm	W x D 150 x H	W x D 150 x H		
Mounting interface	VESA + L&S 5	2 x VESA + L&S 5		
Power consumption	650 Watt	1300 Watt		
Power supply	230 VAC 50-60Hz	230 VAC 50-60Hz		
Max. surrounding temp.	<b>-20°C to +35°C</b>	<b>-20°C to +35°C</b>		
Ref.	FOD-55HB	FOD-55HBD		
Dimensions in mm	W x D 313 x H	W x D 480x H		Max. ° 55
Max. flat panel in mm	W x D 150 x H	W x D 150 x H		
Mounting interface	VESA + L&S 5	2 x VESA + L&S 5		
Power consumption	650 Watt	1300 Watt		
Power supply	230 VAC 50-60Hz	230 VAC 50-60Hz		
Max. surrounding temp.	<b>-20°C to +35°C</b>	<b>-20°C to +35°C</b>		
Ref.	FOD-60HB	FOD-60HBD		
Dimensions in mm	W 1204 x D 313 x H 2608	W 1204 x D 480x H 2608		Max. ° 60
Max. flat panel in mm	W 1385 x D 150 x H 800	W 1385 x D 150 x H 800		
Mounting interface	VESA + L&S 5	2 x VESA + L&S 5		
Power consumption	650 Watt	1300 Watt		
Power supply	230 VAC 50-60Hz	230 VAC 50-60Hz		
Max. surrounding temp.	<b>-20°C to +35°C</b>	<b>-20°C to +35°C</b>		

**Suitable for full sunlight**Check [www.audipack.com](http://www.audipack.com) for an updated product range**ACCESSORIES****UNIFLATFIX PRO (UNIVERSAL FLAT PANEL BRACKETS)**

Lock the bracket with the optional lock

Ref.: **230052**


Ref.	UFPRO-0500	UFPRO-0700	UFPRO-0800	UFPRO-0801	UFPRO-0900
Dimensions in mm	W 516 x D 32 x H 382	W 716 x D 32 x H 502	W 860 x D 32 x H 502	W 860 x D 39 x H 727	W 960 x D 39 x H 727
Max. mounting range in mm	W 470 x H 360	W 670 x H 446	W 810 x H 446	W 810 x H 671	W 910 x H 671
Min. mounting range in mm	W 125	W 125	W 130	W 120	W 120

# Projector mounts

**Mount any brand and type of projector to any Audipack system.**

*Being one of the first to offer professional projector presentation accessories, Audipack products are state-of-the-art and are proven high quality.*

*The Audipack range of projector accessories and system varies from standard products, such as ceiling mounts, lifts and housings, to custom built stack frames and flight cases with integrated lift systems.*

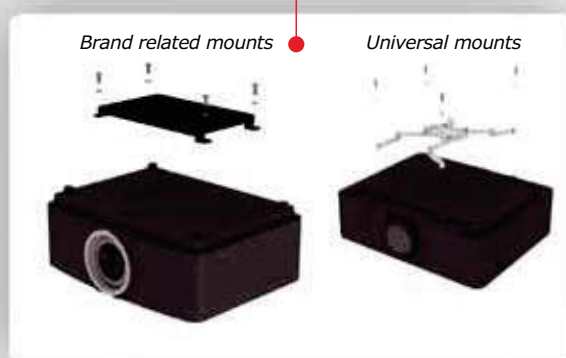

**Audipack®**

*It's great to have solutions...*

# Mounts any **brands** and **type** of projector

## Brand related projector mounts




**With an Audipack projector mount, your projector is quickly and easily mounted to create a presentation solution. Audipack projector amounts are designed to precisely fit any brand or type of projector.**

The interface makes it possible to swap projectors without the need to change the ceiling mount or lift. When necessary, switching the projector takes little time. Audipack designs and manufactures all mounts in- house and includes the manufacturers' recommendations in the product characteristics.

The result is a perfect fit between mount and projector, ensuring the safest and most rigid product build.

## Universal projector mounts

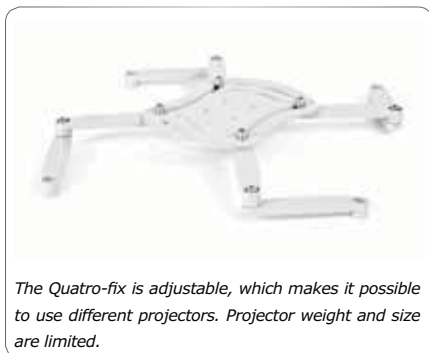

- ▲ **All current projector brands and models from stock**
- ▲ **For any brand and type**
- ▲ **Durable, well designed and slim constructions**

## QUATRO-FIX (UNIVERSAL PROJECTOR MOUNT)

<b>Ref.</b> Max. mounting range in mm. Suitable for Max. load	<b>QFIX-1</b> 440 in diameter tube sets and products with ball-joint 10-20 Kg	<b>QFIX-2</b> 440 in diameter mirror-kits, ceiling lifts and housings 10-20 Kg	<b>QFIX-3</b> W336 x D 382 all purposes 20-30 Kg

## BRAND RELATED PROJECTOR MOUNTS

--	--

**Contact our website wizard or our sales department for your type of mount**



# Ceiling mounts

## for projectors

***The projector is not only important element in a professional installation.***

*Features such as fast installation, easy adjustment and stability of any accessories are just as important.*



**Audipack®**

*It's great to have solutions...*

# Ultimate flexibility

## with Audipack ceiling mounts



### Quatro-Fix®, the allrounder

The Quatro-Fix projector mounts offers maximum flexibility to set up any projector up to 20kg within the most complex of installs.

The Quatro-Fix® ceiling mounts and the brand compatible mounts are equipped with a special newly designed ball joint that allows you to position the projector with minimal effort. The ball joint is designed to rotate from its own point of gravity. This results in a flexible and almost friction free adjustment capability.

### UTS, for projector mounts and more.

Audipack also offers brand compatible projector mounts combined with the UTS (**U**niversal **T**ube **S**et) for any brand or type of projector, from stock. Brand compatible mounts are always a perfect fit and comply with manufacturers' installation guides and standards. For this type of ceiling mount an additional projector or camera mount is needed to complete the set.

UTS + brand related mount = the perfect solution



- ▲ **Rigid and safe construction**
- ▲ **Any configuration possible**
- ▲ **Very flexible**
- ▲ **Integrated cable ducts**

### Quick release, the perfect AV rental solution ...

Look no further for a ceiling mount that allows the fast and easy exchange of projectors. The quick release ball joint allows swift and safe installation. Especially designed for professional rental and stage use. (see page 131)



Angle adjustment



Perfect adjustment with telescopic feature



Cable passage



Cable passage

## CEILING MOUNTS

**QUATRO-FIX**

Max. load

Mounting range in mm  
440 in diameter

Angle adjustment in degrees 15° + 15°

**Ref. QFIX-0100**Length in mm 100  
Tube diameter in mm 54**Ref. QFIX-0300**Length in mm 300  
Tube diameter in mm 54**Ref. QFIX-0500T**Length in mm 355-500  
Tube diameter in mm 54-60**Ref. QFIX-0700T**Length in mm 450-700  
Tube diameter in mm 54-60**Ref. QFIX-1000T**Length in mm 604-1000  
Tube diameter in mm 54-60**QUATRO-FIX XL**Mounting range in mm  
W336 x D 382

Angle adjustment in degrees 15° + 15°

**Ref. QFIX3-0100**Length in mm 100  
Tube diameter in mm 54**Ref. QFIX3-0300**Length in mm 300  
Tube diameter in mm 54**Ref. QFIX3-0500T**Length in mm 355-500  
Tube diameter in mm 54-60**Ref. QFIX3-0700T**Length in mm 450-700  
Tube diameter in mm 54-60**Ref. QFIX3-1000T**Length in mm 604-1000  
Tube diameter in mm 54-60**UNIVERSAL TUBE SET**

Angle adjustment in degrees 15° + 15°

**Ref. UTS-0100**Length in mm 100  
Tube diameter in mm 54**Ref. UTS-0300**Length in mm 300  
Tube diameter in mm 54**Ref. UTS-0500T**Length in mm 355-500  
Tube diameter in mm 54-60**Ref. UTS-0700T**Length in mm 450-700  
Tube diameter in mm 54-60**Ref. UTS-1000T**Length in mm 604-1000  
Tube diameter in mm 54-60

## CEILING MOUNTS

**HEAVY DUTY PROJECTOR CEILING MOUNT**

<b>Ref.</b>	<b>390065</b>
Length in mm	164
Tube diameter in mm	45
Angle adjustment in degrees	20° + 20°



<b>Ref.</b>	<b>390061</b>
Length in mm	697-937
Tube diameter in mm	45-50
Angle adjustment in degrees	20° + 20°

**QUICK RELEASE PROJECTOR CEILING MOUNT**

<b>Ref.</b>	<b>392165</b>
Length in mm	142
Tube diameter in mm	45
Angle adjustment in degrees	30° + 30°



<b>Ref.</b>	<b>392161</b>
Length in mm	675-915
Tube diameter in mm	45-50
Angle adjustment in degrees	30° + 30°

**QUICK RELEASE PLUS PROJECTOR CEILING MOUNT WITH 3D ADJUSTMENT**

<b>Ref.</b>	<b>392365</b>
Length in mm	193
Tube diameter in mm	45
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°



<b>Ref.</b>	<b>392361</b>
Length in mm	726-966
Tube diameter in mm	45-50
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°

**QUICK RELEASE PLUS + CEILING MOUNT WITH 3D ADJUSTMENT & HORIZONTAL SHIFT**

<b>Ref.</b>	<b>392665</b>
Length in mm	193
Tube diameter in mm	45
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°
Horizontal shift in mm	60



<b>Ref.</b>	<b>392661</b>
Length in mm	675-915
Tube diameter in mm	45-50
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°
Horizontal shift in mm	60





## ACCESSORIES

### PROJECTOR MOUNTS (SEE PAGE 123 FOR THE FULL PROGRAM)

Mount any brand and type of projector on any Audipack system with the Audipack projector mounts.




Quatro-Fix®



Brand related mounts



### EXTENSION TUBES (ONLY SUITABLE FOR THE QUATRO-FIX® AND THE UTS)



Diameter 54 mm.



Ref.

Length in mm  
Length gain in mm

**ET-1000**

1000  
940

**ET-1500**

1500  
1440


**ET-2000**

2000  
1940

**ET-2500**

2500  
2440

### EXTENSION TUBES (ONLY SUITABLE FOR HEAVY DUTY AND QUICK RELEASE TUBE SETS)



Diameter 45 mm.



Ref.

Length in mm  
Length gain in mm

**390022**

750  
350

**390066**

1000  
600

**390367**

1250  
850

**390210**

1500  
1100

**390321**

1750  
1350

**390211**

2000  
1600

### SHOCK ABSORBER, FOR CEILING MOUNTS



Ref.

Suitable for

**392193**

390065, 390061, 392165, 392161, 392365, 392361, 392665, 392661

### EQUIPMENT CABINET (UNIVERSAL)



Ref.

Max. equipment dimensions in mm

**EC-5**

W 350 x D 350 x H 100

### CAMERA SUPPORT



Ref.

**CS-1** (Only suitable for 54 mm diameter tubes)

**CEILING MOUNTS**
**QUICK RELEASE COUPLER**

		
<b>Ref.</b> Suitable for Max. load	<b>BJ-1QR</b> Q-fix, UTC, UTS 10 Kg	

**3D ADJUSTMENT FOR BALL JOINTS**

			
<b>Ref.</b> Feature Suitable for	<b>BJ-3D1</b> 3D fine tuning Q-fix, UTC, UTS	<b>BJ-3D1S</b> 3D fine tuning & side shift Q-fix, UTC, UTS	

**TRUSS MOUNTS**

			
<b>Ref.</b> Suitable for	<b>TM-54</b> 54 mm (Q-fix & UTS only)	<b>TM-60</b> (Telescopic tube sets only) 60 mm (Q-fix & UTS only)	<b>260140</b> All "39....." products

**SEVERAL OPTIONS**

		
<b>Ref.</b> Type Suitable for	<b>390199</b> Manual rotation All "39....." tube sets	<b>392150</b> Construction clamp All

**CEILING MOUNT PLATES WITH TILT ADJUSTMENT**

		<p>Adjustment: -5° to +90°</p> <p>Standard on:</p> <table border="0"> <tr> <td>QFIX-0500T</td> <td>UTS-0500T</td> </tr> <tr> <td>QFIX-0700T</td> <td>UTS-0700T</td> </tr> <tr> <td>QFIX-1000T</td> <td>UTS-1000T</td> </tr> <tr> <td>QFIX3-0500T</td> <td></td> </tr> <tr> <td>QFIX3-0700T</td> <td></td> </tr> <tr> <td>QFIX3-1000T</td> <td></td> </tr> </table>	QFIX-0500T	UTS-0500T	QFIX-0700T	UTS-0700T	QFIX-1000T	UTS-1000T	QFIX3-0500T		QFIX3-0700T		QFIX3-1000T	
QFIX-0500T	UTS-0500T													
QFIX-0700T	UTS-0700T													
QFIX-1000T	UTS-1000T													
QFIX3-0500T														
QFIX3-0700T														
QFIX3-1000T														
<b>Ref.</b> Suitable for	<b>CMP-4</b> 60 mm tubes	<b>CMP-5</b> 54 mm tubes												

# ***Truss mounts***

## ***for projectors***

***Audipack truss mounts, ideal for rental & staging***

*Audipack truss mounts offer flexible installation options and secure features*



**Audipack®**

*It's great to have solutions...*

# Safe and solid

## truss mounting



**Do you need easy and quick projector truss mounting? Use the Audipack truss mounts!**

Audipack offers a wide range of truss mountable projector mounts and solutions. To address different applications, Audipack offers specific solutions, from a simple projector mount to sophisticated 3D adjustment features. The mounts allow a quick and safe installation to be performed every time.

The **UTC range** offers a universal but very flexible and well-designed mounting range for projectors up to 30kg. Light weight, tolerance free and with integrated ball joints for perfect screen alignment.

The **Quick release** product line is distinguished by its unique separable ball joint and is the safest way for installing projectors up to 52kg to trusses. After installing the tube set, just click the projector to the tube set - 'click and go'.

Align the projector to the screen with the ball joint or even with the optional 3D adjustment (**QR-plus**) or linear adjustment (**QR-plus+**); ideal for seamless projection.

- ▲ **Fine pitch, pixel on pixel adjustment**
- ▲ **Rigid and safe construction**
- ▲ **Any configuration possible**
- ▲ **Very flexible**
- ▲ **Integrated cable ducts**

### Quick release, the perfect AV rental solution ...

Look no further for a ceiling mount that allows the fast and easy exchange of projectors. The quick release ball joint allows swift and safe installation. Especially designed for professional rental and stage use.



Perfect adjustment with telescopic feature



Cable passage



Cable passage



## TRUSS MOUNTS

## TRUSS MOUNTS WITH STANDARD BALL JOINT

**Ref. UTC-0150B**

Length in mm	150
Angle adjustment in degrees	15° + 15°

**Ref. UTC-0300B**

Length in mm	300
Angle adjustment in degrees	15° + 15°

**Ref. UTC-1000TB**

Length in mm	604-1000
Angle adjustment in degrees	15° + 15°



## QUICK RELEASE TRUSS MOUNT

**Ref. 392167**

Length in mm	252
Angle adjustment in degrees	30° + 30°

**Ref. 392166**

Length in mm	760-1000
Angle adjustment in degrees	30° + 30°



## QUICK RELEASE PLUS TRUSS MOUNT WITH 3D ADJUSTMENT

**Ref. 392367**

Length in mm	303
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°

**Ref. 392366**

Length in mm	811-1051
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°

QUICK RELEASE PLUS<sup>+</sup> TRUSS MOUNT WITH 3D ADJUSTMENT & HORIZONTAL SHIFT**Ref. 392667**

Length in mm	303
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°
Horizontal shift in mm	40

**Ref. 392666**

Length in mm	740 - 900
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°
Horizontal shift in mm	40



## TRUSS MOUNTS

## ACCESSORIES

## PROJECTOR MOUNTS (SEE PAGE 123 FOR THE FULL PROGRAM)

Mount any brand and type of projector on any Audipack system with the Audipack projector mounts.



Quatro-Fix®



Brand related mounts



## 3D FINE TUNE ADJUSTMENT, ADD ON



**Ref.**  
Suitable for  
Description



**BJ-3D1**  
UTC range  
3D adjustment



**BJ-3D1S**  
UTC range  
3D adjustment and horizontal shift


## STAINLESS STEEL SECURITY CABLE



**Ref.**  
Length in mm

**399941**  
1000

## EXTENSION TUBES (ONLY SUITABLE FOR THE UTC)



Diameter 54 mm.



**Ref.**  
Length in mm  
Length gain in mm

**390022**  
750  
350

**390066**  
1000  
600


**390367**  
1250  
850

**390210**  
1500  
1100

**390321**  
1750  
1350

**390211**  
2000  
1600

## EXTENSION TUBES (ONLY SUITABLE FOR QUICK RELEASE TUBE SETS)



Diameter 45 mm.



**Ref.**  
Length in mm  
Length gain in mm

**390022**  
750  
350

**390066**  
1000  
600

**390367**  
1250  
850

**390210**  
1500  
1100

**390321**  
1750  
1350

**390211**  
2000  
1600

## QUICK RELEASE COUPLER



**Ref.**  
Suitable for  
Max. load



**BJ-1QR**  
Q-fix, UTC, UTS  
10 Kg

# ***Short throw*** wall mounts

## ***for projectors***

### ***The Audipack short throw wall mounts***

*are ideal to mount your projector directly on the wall or to an Audipack projection set up.*



**Audipack®**

*It's great to have solutions...*

# Easy installation with Audipack wall mounts

**Audipack short throw wall mounts with universal projector mount is a most flexible yet durable solution.**

Audipack short throw wall mounts have slim dimensions, a modern design and provide 100% tolerance free projector mounting. The easily accessible hidden cable ducts are ideal for hiding projector cabling and routing it to the wall.

The projector is mounted onto the famous Audipack Quatrofix, with a ball joint that allows for a rigid, steady projector mounting.

The short throw mount can be easily attached directly to the wall or onto a frame, whichever is the best solution for the projection screen.

- ▲ Easy installation
- ▲ Rigid wall mounting
- ▲ Accurate projector adjustment
- ▲ Universal or brand related projector mounts

## SHORT THROW ARMS



### **Ref. PWM-ST0600**

Adjustment range in mm 360-600  
Max. mounting range in mm 440 in diameter



### **Ref. PWM-ST1200**

Adjustment range in mm 960-1200  
Max. mounting range in mm 440 in diameter



### **Ref. PWM-ST0800T**

Adjustment range in mm 500-800  
Max. mounting range in mm 440 in diameter



### **Ref. PWM-ST1500T**

Adjustment range in mm 800-1500  
Max. mounting range in mm 440 in diameter



Including Universal Quatro-Fix

## WALL MOUNT



### **Ref. PWM-0450**

Length in mm 450  
See page for 123 for a projector mount, to mount your projector



### **Ref. PWM-0450S (Set)**

Length in mm 450  
Max. mounting range in mm 440 in diameter



Including Universal Quatro-Fix



# ***Stack- and rigging frames***

## ***for projectors***

***The Audipack stack and rigging frames***

*a sturdy solution to meet your needs*



**Audipack®**

*It's great to have solutions...*

# A **NEW** view on **projector rigging and stacking**



**The Audipack PSF stack frame series is the safest way for handling a projector in rental and staging applications.**

Audipack has developed a special lightweight frame that fits the projector like a glove. The strong, aluminium, light weight construction gives a good grip for lifting, table installation or installing the frame and projector to a truss.

The projector is fitted to the bottom frame on adjustable axes, which allow the projector to be lined up to the screen with high accuracy. Multiple frames can be easily connected and stacked for high output projection. The PSF stack-frames are available in standard sizes, and are also available in custom sizes on request.

- ▲ **New and modern design**
- ▲ **Lightweight 50 mm tubular construction**
- ▲ **Easy to adapt to any projector brand and type**
- ▲ **Integrated fine tune 3D adjustment**
- ▲ **Rotating mounting points for flying installation**
- ▲ **T-Slot mounting in tubes for accessory installation**
- ▲ **5 times overload Safety factor**
- ▲ **Custom models available on request**



Visit [www.audipack.com](http://www.audipack.com) for product wizard and list of models

Optional:

Double coupler truss clamp: **260210**

Stainless steel security cable: **399941**

## STACK FRAMES



Order explanation:

**PSF-608525**

Height size of the internal stack frame in cm.

Depth size of the internal stack frame in cm.

Width size of the internal stackframe in cm.

Projector Stack Frame

**\*Note:**

**To order your stack frame make sure that your projector including cables and lens fits in the internal dimensions of the stack frame**



Ref.  
Max. projector\* dimensions in mm

**PSF-374418**

W 370 x D 440 x H 180

**PSF-465422**

W 460 x D 540 x H 220

**PSF-504216**

W 500 x D 420 x H 160

**PFS-504718**

W 500 x D 470 x H 180

**PFS-505218**

W 500 x D 520 x H 180

**PFS-505620**

W 500 x D 560 x H 200

**PSF-547417**

W 540 x D 740 x H 170

**PSF-554422**

W 550 x D 440 x H 220

**PSF-578030**

W 570 x D 800 x H 300

**PFS-608525**

W 600 x D 850 x H 250

**PFS-655830**

W 650 x D 580 x H 300

**PFS-658530**

W 650 x D 850 x H 300

## STACK FRAMES CLASSIC

**Custom sizes available on request**



Ref.  
Max. projector dimensions in mm

**P3478**

W 320 x D 430 x H 170

**P5348**

W 400 x D 525 x H 235

**P5217**

W 500 x D 425 x H 160

**P5343**

W 520 x D 600 x H 255

**P2895**

W 570 x D 783 x H 243

**P3723**

W 570 x D 783 x H 293

Ref.  
Max. projector dimensions in mm

**P3593**

W 579 x D 641 x H 270

**P3657**

W 580 x D 860 x H 243

**P5045**

W 605 x D 565 x H 293

**P5406**

W 650 x D 860 x H 305

**P5515**

W 385 x D 1015 x H 385



# ***Indoor open air security and theft delay projector housings***

***The Audipack theft delay housings***

*for projectors protect your equipment without hiding it*



**Audipack®**

*It's great to have solutions...*

# Protect your projector

## with the indoor **theft delay** housings



### **Audipack's Open Air theft delay housings**

are the ideal solution for the indoor installation and secure protection of a projector, whilst allowing for the practicalities of access.

The projector can be easily reached for service – by using this mount, time and money on maintenance can be saved.

The 'Open Air' range is available in several standard sizes. This means there is always a perfect fit your projector. Custom built models are available on request.

The durable build quality of the 'Open Air' model ensures good protection with maximum ventilation.

To make servicing easier the 'Open Air' housing can be equipped with an extending mounting platform. This gives easy access, makes servicing faster and requires no tools.

### **How does it work?**

Mounting the projector in the all-steel housing is easily achieved using the optional Audipack Quatro-Fix or brand compatible projector mount. The front of the cage can be locked using two steel pins with disk locks.

The steel pins can be placed in five different positions, ensuring that the lens is never obstructed. A special cover on top of the housing protects the disk locks from being removed or unlocked. By adding the optional extension platform the projector slides out of the housing for fast maintenance.

- ▲ **Protection of your projector**
- ▲ **Special theft delay ceiling mounts**
- ▲ **Custom build models available**



Freely adjustable bars



Integrated alarm



Easy access models available



**"OPEN AIR" HOUSINGS**


<b>Ref.</b>	<b>P3858</b>
Dimensions in mm	W 420 x D 370 x H 222
Inner dimensions in mm*	W 400 x D 325 x H 120
<i>*the projector has to fit within these dimensions including lens and cables</i>	



<b>Ref.</b>	<b>P3888</b>
Dimensions in mm	W 420 x D 570 x H 282
Inner dimensions in mm*	W 400 x D 530 x H 180
<i>*the projector has to fit within these dimensions including lens and cables</i>	



<b>Ref.</b>	<b>P3898</b>
Dimensions in mm	W 535 x D 525 x H 267
Inner dimensions in mm*	W 515 x D 480 x H 165
<i>*the projector has to fit within these dimensions including lens and cables</i>	

**EASY ACCESS "OPEN AIR" HOUSINGS****"Easy access"**

<b>Ref.</b>	<b>P3908</b>
Dimensions in mm	W 420 x D 370 x H 247
Inner dimensions in mm*	W 400 x D 325 x H 120
<i>*the projector has to fit within these dimensions including lens and cables</i>	



<b>Ref.</b>	<b>P3918</b>
Dimensions in mm	W 420 x D 575 x H 307
Inner dimensions in mm*	W 400 x D 530 x H 180
<i>*the projector has to fit within these dimensions including lens and cables</i>	



<b>Ref.</b>	<b>P3928</b>
Dimensions in mm	W 535 x D 525 x H 292
Inner dimensions in mm*	W 515 x D 480 x H 165
<i>*the projector has to fit within these dimensions including lens and cables</i>	



<b>Ref.</b>	<b>P5692</b>
Dimensions in mm	W 600 x D 820 x H 324
Inner dimensions in mm*	W 534 x D 734 x H 225
<i>*the projector has to fit within these dimensions including lens and cables</i>	






**ACCESSORIES****PROJECTOR MOUNTS (SEE PAGE 123 FOR THE FULL PROGRAM)**

Mount any brand and type of projector on any Audipack system with the Audipack projector mounts.

**Quatro-Fix®****Brand related mounts**

INDOOR "OPEN AIR" HOUSINGS




**THEFT DELAY TUBE SET FOR CEILING MOUNTING**

			<div data-bbox="1294 208 1369 282">  </div> <div data-bbox="1385 197 1460 282">  </div>
<b>Ref.</b> Length in mm	<b>390965</b> 160	<b>390961</b> 700-940	

**BALL JOINT PROTECTION**

		<div data-bbox="1385 618 1460 703">  </div>
<b>Ref.</b>	<b>392070</b>	

**THEFT DELAY BOLTS**

			
<b>Ref.</b> Suitable for	<b>390384</b> 390965 & 390065	<b>390413</b> 390961 & 390061 (normal ceiling mount, see page 125)	

# ***Outdoor housings***

***for projectors***

## **24/7 outdoor housings for projectors**

*The Audipack outdoor housings, for any environment  
in any weather*



**Audipack®**

*It's great to have solutions...*

# *Install any projector 24/7*

## *outdoors*



- ▲ **Easy projector access**
- ▲ **Available in any colour**
- ▲ **Special projection front glass**
- ▲ **Replaceable filters**
- ▲ **Available for any projector**



Custom short throw outdoor housing.



Standard concept outdoor housing.



24/7 outdoor housing with high pressure ventilation & AC

### ***A projector outdoor housing is actually a unique product***

which allows a large screen projector to be installed outside, 24/7. A well-designed ventilation/cooling system coupled with optimal accessibility of the projector results in a very efficient and compact housing.


The projector is enclosed in a mainly aluminium housing, with an outdoor coating and galvanised parts. It can be easily installed as both sides can be opened. The projector is placed on a slide so that it can be drawn out of the housing. In this way it can be reached from all sides for service and maintenance purposes. Attached to the slide is a rubber sealing with gaps to draw air directly onto the projector. In this way no cooled air is lost.

### ***How does it work***

When turning on the projector a powerful ventilation system is activated which removes warm to the outside.

An internal special ventilation system cause a 'chill effect', with air blown over the projector and lens. The housing can optionally be equipped with a recirculating air-conditioning unit. When the projector is not in use, the air-conditioning minimises the possibility of heating by radiated warmth. A double roof construction gives additional protection against extreme sun radiation.

Internal condensation is reduced thanks to a thermostatically controlled heating and active ventilation system, combined with self regulating air-conditioning (optional).

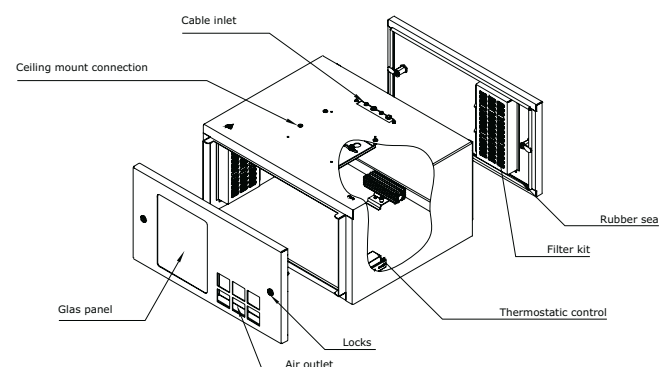




# ***Silencing housings***

***for any projector***

## ***The Audipack silencing housings***

*There is nothing better than a presentation where the projector cannot be heard ....*

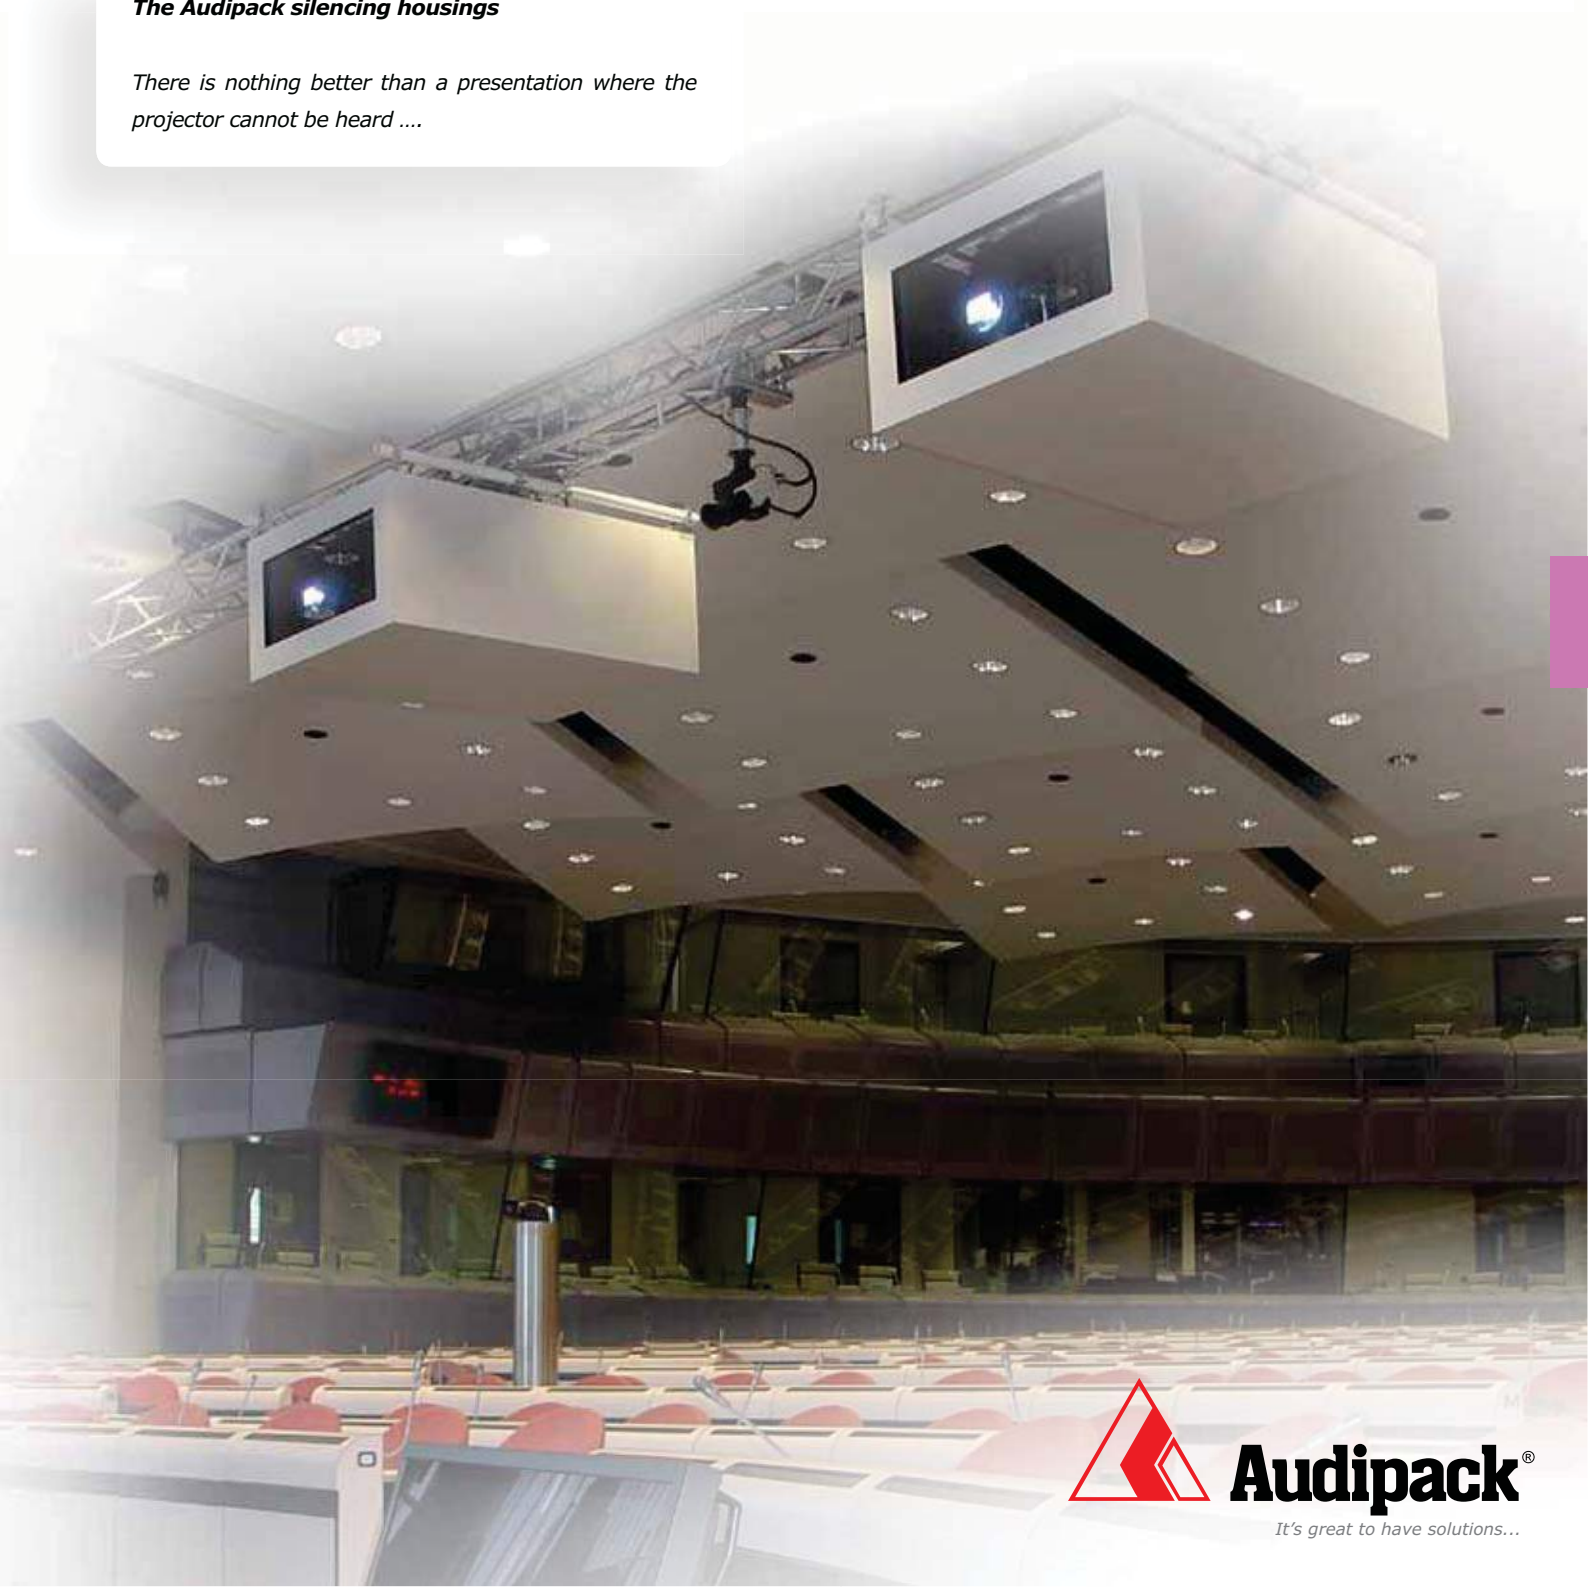

**Audipack®**

*It's great to have solutions...*

# Reduce the audible noise

**Custom made for each projector**

**of any projector**

## Flightcase model



**This housing absorbs noise levels by isolating the projector and routing the air flow to and from the projector through a muffling filter.**


This housing absorbs noise levels by isolating the projector and routing the air flow to and from the projector through a muffling filter. Fans ensure sufficient air flow. The Silencer is equipped with special fans and a special projection glass window in front of the projector lens. The Silencer reduces audible noise by approx. 16 – 20 dBA. It is suitable for inside use only and is available in black, white or grey at standard. Other colours are available on request.

## Projectline "furniture" model



- An Audipack projector mount to fix the projector in the housing is needed when the projector is mounted on an Audipack ceiling lift or ceiling mount, see page 129.
- The Silencer can also be equipped with for example 4 crane hooks to mount the Silencer to a ceiling with steel cables.
- It's also possible to put the Silencer down on installed feet and to locate him anywhere.

## Installation options

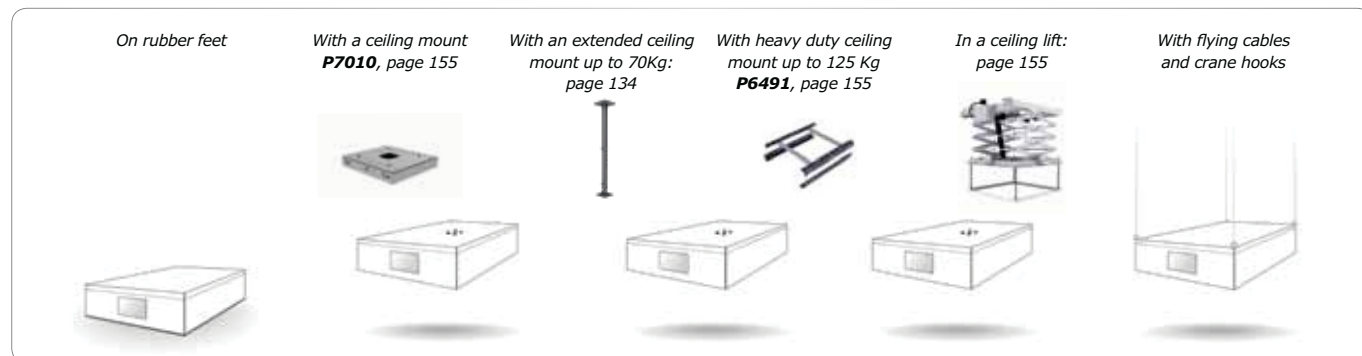

- ▲ **Removable bottom** (when ceiling mounted)
- ▲ **Custom build for any projector**
- ▲ **Minimized dimensions**
- ▲ **Available in flightcase and project line finishes**

Please refer price list to [www.audipack.com](http://www.audipack.com) for updated models



Run time registration



Optional crane hooks,  
for ceiling mounting



Neatly installed cables

# ***Smoke, dust and pool***

## ***protective housings***

***For projectors installed in areas with dust, smoke or high humidity such as swimming pools.***

*Protect the projector with a protective Audipack housing, fitted to your specification*



**Audipack®**

*It's great to have solutions...*





# Protect any projector against smoke, dust and chlorine



**The anti-smoke and dust housing** is a closed, custom-made housing that protects a projector against smoke and fine dust. It works on overpressure and is equipped with a double air filter and a dirty filter indicator with LED. The housing is ventilated with outside air. The maximum temperature of the surrounding air must not be more 30°C maximum to prevent the projector from shutting down.


**The swimming pool housing** is a stainless steel housing to protect the projector from the environment. By using heating and active ventilation, the humidity of the air inside the projector housing is reduced. The ventilation is necessary to cool down the projector and to lead away heat developed by the projector. When the housing is equipped with thermostatic control (optional), the heating is activated when the projector is switched off.

Installing electronic equipment in environments such as a swimming pool remains a risk unless the air that is blown into the projector housing comes from outside the area where the projector is installed. In this case, chlorine fumes could affect optical parts and electronics. The projector requirements regarding the maximum temperature and humidity of the environment have to be taken into account.

**Custom made for each projector**

Please refer price list to [www.audipack.com](http://www.audipack.com) for updated models

- ▲ Replaceable filters
- ▲ Custom build for any projector
- ▲ Minimized dimensions

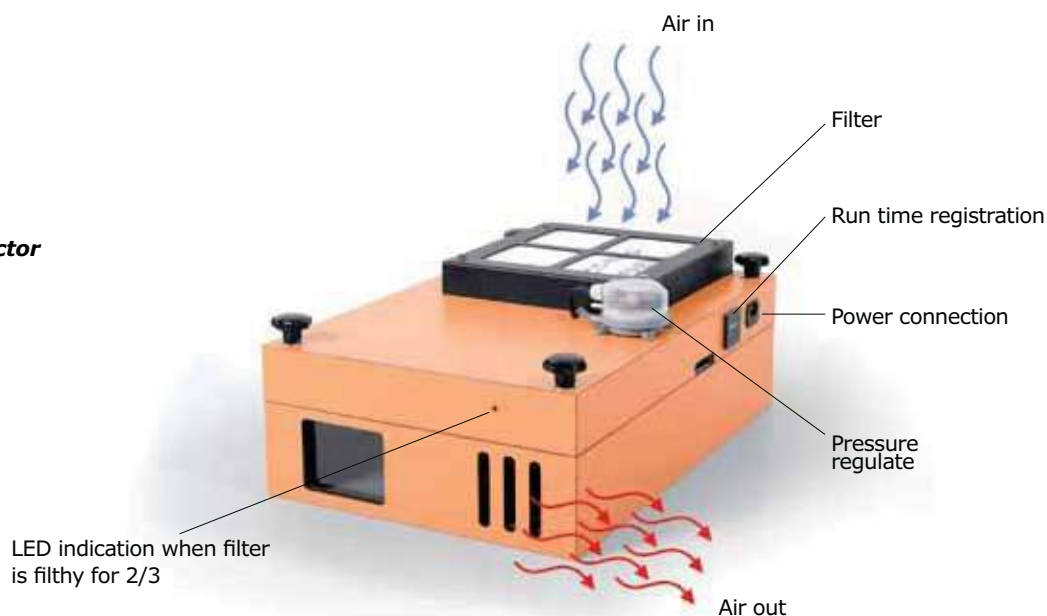



# Ceiling lift systems

## for projectors

### ***Integration of projectors into the ceiling***

*For example, in a board room, home cinema, auditorium or conference hall*

*The interior finish looks more streamlined with the projector out of sight – and the equipment is more secure*



**Audipack®**

*It's great to have solutions...*

# The solution for **integrating** projectors in **ceilings**



**The Audipack projector lift systems have a reputation as durable systems for lowering a projector from the ceiling.**

These ceiling lift systems are the perfect solution for integrating projectors into ceilings in board rooms, home cinemas, auditoriums and conference halls. Not only does the interior look better but the projector is less prone to theft.

Well-made and safe, the Audipack ceiling lift system requires little maintenance. With each use, the lift moves precisely to its pre-set position, every time. You can be confident that the projected image will centre perfectly on the screen.

**3rd service position** (Various lift systems are supplied with this feature)  
With the 3rd service position it is possible to let the projector run through the maximum length.


This length is determined by the number of scissors that the lift is provided.

1 - Stored position      2 - Presentation position      3 - Service position



- ▲ **Durable build**
- ▲ **Low maintenance**
- ▲ **Quick installation**
- ▲ **Low noise engine**

## Technical information:

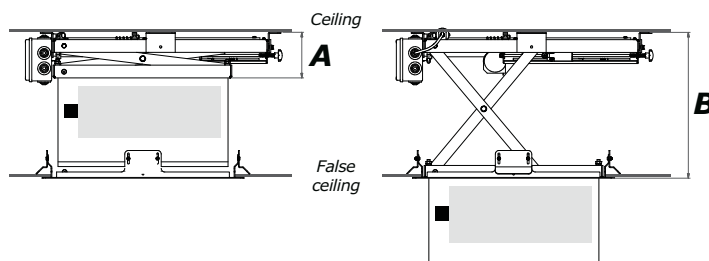

### **A) Construction height**

distance from top to bottom of lift when fully retracted  
(projector, projector mount and ceiling finishing mask not included)

### **B) Overall stroke**

distance from top to bottom of lift when fully extended  
(projector, projector mount and ceiling finishing mask not included)



Safety device



Accurate projector positioning



Ceiling finishing



Smooth finishing

**PCL-M350 SCISSOR LIFT SYSTEMS** Movable frame dimensions: **W 330 x D 490 mm**

Ref.	<b>PCL-M350-1</b>
Overall stroke in mm	<b>350</b>
Dimensions in mm	W 330 x D 590 x H 90
Number of scissors	1
Nett weight	10 Kg
Connectivity	Contact relay, RS-232 Optional wall switch or IR/RF remote



Ref.	<b>PCL-M350-2</b>
Overall stroke in mm	<b>700</b>
Dimensions in mm	W 330 x D 590 x H 115
Number of scissors	2
Nett weight	12 Kg
Connectivity	Contact relay, RS-232 Optional wall switch or IR/RF remote



Including white ceiling finishing mask

Power supply:  
**110-230 VAC 50-60 Hz/24 VDC****PCL-X350 SCISSOR LIFT SYSTEMS** Movable frame dimensions: **W 490 x D 490 mm**

Ref.	<b>PCL-X350-1</b>
Overall stroke in mm	<b>350</b>
Dimensions in mm	W 590 x D 492 x H 90
Number of scissors	1
Nett weight	11 Kg
Connectivity	Contact relay, RS-232 Optional wall switch or IR/RF remote



Ref.	<b>PCL-X350-2</b>
Overall stroke in mm	<b>700</b>
Dimensions in mm	W 590 x D 492 x H 115
Number of scissors	2
Nett weight	13 Kg
Connectivity	Contact relay, RS-232 Optional wall switch or IR/RF remote



Including white ceiling finishing mask

Power supply:  
**110-230 VAC 50-60 Hz/24 VDC****PCL-2050 SCISSOR LIFT SYSTEMS** Movable frame dimensions: **W 330 x D 590 mm**

Ref.	<b>PCL-2050-1</b>
Overall stroke in mm	<b>500</b>
Dimensions in mm	W 452 x D 707 x H 115
Number of scissors	1
Nett weight	21 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	<b>PCL-2050-2</b>
Overall stroke in mm	<b>985</b>
Dimensions in mm	W 452 x D 707 x H 170
Number of scissors	2
Nett weight	22 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Including white ceiling finishing mask

Power supply: **230 VAC 50-60 Hz**

## CEILING LIFT SYSTEMS

**PCL-3050 SCISSOR LIFT SYSTEMS** Movable frame dimensions: **W 450 x D 590 mm**

Very silent lift system



Including 3rd service  
position

Including white ceiling finishing mask  
Power supply: 230 VAC 50-60 Hz

Ref.	PCL-3050-1
Overall stroke in mm	<b>500</b>
Dimensions in mm	W 571 x D 707 x H 115
Number of scissors	1
Nett weight	26 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	PCL-3050-2
Overall stroke in mm	<b>985</b>
Dimensions in mm	W 571 x D 707 x H 170
Number of scissors	2
Nett weight	27 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	PCL-3050-3
Overall stroke in mm	<b>1445</b>
Dimensions in mm	W 571 x D 707 x H 200
Number of scissors	3
Nett weight	28 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	PCL-3050-4
Overall stroke in mm	<b>1910</b>
Dimensions in mm	W 571 x D 707 x H 240
Number of scissors	4
Nett weight	29 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote

**PCL-5050 SCISSOR LIFT SYSTEMS** Movable frame dimensions: **W 560 x D 560 mm**

Very silent lift system

Fits directly  
a standard 600x600  
ceiling tile cut-out



Including white ceiling finishing mask  
Power supply: 230 VAC 50-60 Hz

Ref.	PCL-5050-1
Overall stroke in mm	<b>490</b>
Dimensions in mm	W 691 x D 688 x H 115
Number of scissors	1
Nett weight	25 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



PS-252

Ref.	PCL-5050-2
Overall stroke in mm	<b>900</b>
Dimensions in mm	W 691 x D 688 x H 155
Number of scissors	2
Nett weight	27,5 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



PS-252

Ref.	PCL-5050-3
Overall stroke in mm	<b>1350</b>
Dimensions in mm	W 691 x D 688 x H 200
Number of scissors	3
Nett weight	30 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



PS-252

Ref.	PCL-5050-4
Overall stroke in mm	<b>1800</b>
Dimensions in mm	W 691 x D 688 x H 230
Number of scissors	4
Nett weight	33,5 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



PS-252



**4050 SCISSOR LIFT SYSTEMS**Movable frame dimensions: **W 450 x D 650 mm**

**Including 3rd service position**

**Including white ceiling finishing mask**  
Power supply: **230 VAC 50-60 Hz**

Ref.	P1981
Overall stroke in mm	<b>550</b>
Dimensions in mm	W 680 x D 770 x H 120
Number of scissors	1
Nett weight	35 Kg
Connectivity	Contact relay, Optional: wall switch or IR/RF remote



Ref.	P3642
Overall stroke in mm	<b>1085</b>
Dimensions in mm	W 680 x D 770 x H 175
Number of scissors	2
Nett weight	39 Kg
Connectivity	Contact relay, Optional: wall switch or IR/RF remote



Ref.	P3643
Overall stroke in mm	<b>1600</b>
Dimensions in mm	W 680 x D 770 x H 200
Number of scissors	3
Nett weight	43 Kg
Connectivity	Contact relay, Optional: wall switch or IR/RF remote



Ref.	P3644
Overall stroke in mm	<b>2130</b>
Dimensions in mm	W 680 x D 770 x H 225
Number of scissors	4
Nett weight	47 Kg
Connectivity	Contact relay, Optional: wall switch or IR/RF remote



Ref.	P3645
Overall stroke in mm	<b>2640</b>
Dimensions in mm	W 680 x D 770 x H 260
Number of scissors	5
Nett weight	51 Kg
Connectivity	Contact relay, Optional: wall switch or IR/RF remote



Ref.	P3646
Overall stroke in mm	<b>3160</b>
Dimensions in mm	W 680 x D 770 x H 260
Number of scissors	6
Nett weight	53 Kg
Connectivity	Contact relay, Optional: wall switch or IR/RF remote

**1060 SCISSOR LIFT SYSTEMS**Movable frame dimensions: **W 570 x D 900 mm**

**Optional ceiling finishing mask,**  
**Ref: P3136 (CFM-1060) see page 162**

Power supply: **230 VAC 50-60 Hz**

Ref.	P1982
Overall stroke in mm	<b>675</b>
Dimensions in mm	W 630 x D 1117 x H 110
Number of scissors	1
Nett weight	44 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	P3610
Overall stroke in mm	<b>1200</b>
Dimensions in mm	W 630 x D 1117 x H 165
Number of scissors	2
Nett weight	45 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



## CEILING LIFT SYSTEMS

**PCL-1070** SCISSOR LIFT SYSTEMS *Movable frame dimensions: W 770 x D 900 mm*

Connectivity: Contact relay  
Optional wall switch or IR/RF remote



**Including 3rd service position**

**Optional ceiling finishing mask, Ref: P3733 (CFM-1070) see page 156**


Power supply: **230 VAC 50-60 Hz**

Ref.	PCL-1070-1			
Overall stroke in mm	<b>776</b>			
Dimensions in mm	W 770 x D 1017 x H 160			
Number of scissors	1	Nett weight	57 Kg	
				Max. 100 PS-282
Ref.	PCL-1070-2			
Overall stroke in mm	<b>1455</b>			
Dimensions in mm	W 770 x D 1017 x H 210			
Number of scissors	2	Nett weight	61 Kg	
				Max. 100 PS-282
Ref.	PCL-1070-3			
Overall stroke in mm	<b>2130</b>			
Dimensions in mm	W 770 x D 1017 x H 237			
Number of scissors	3	Nett weight	65 Kg	
				Max. 100 PS-282
Ref.	PCL-1070-4			
Overall stroke in mm	<b>2805</b>			
Dimensions in mm	W 770 x D 1017 x H 260			
Number of scissors	4	Nett weight	69 Kg	
				Max. 100 PS-282
Ref.	PCL-1070-5			
Overall stroke in mm	<b>3480</b>			
Dimensions in mm	W 770 x D 1017 x H 290			
Number of scissors	5	Nett weight	73 Kg	
				Max. 100 PS-282
Ref.	PCL-1070-6			
Overall stroke in mm	<b>4170</b>			
Dimensions in mm	W 770 x D 1017 x H 325			
Number of scissors	6	Nett weight	77 Kg	
				Max. 100 PS-282
Ref.	PCL-1070-7			
Overall stroke in mm	<b>4785</b>			
Dimensions in mm	W 770 x D 1017 x H 355			
Number of scissors	7	Nett weight	81 Kg	
				Max. 100 PS-282
Ref.	PCL-1070-8			
Overall stroke in mm	<b>5460</b>			
Dimensions in mm	W 770 x D 1017 x H 382			
Number of scissors	8	Nett weight	85 Kg	
				Max. 100 PS-282

**1090** SCISSOR LIFT SYSTEMS

*Movable frame dimensions: W 815 x D 1000 mm*

Connectivity: Contact relay  
Optional wall switch or IR/RF remote

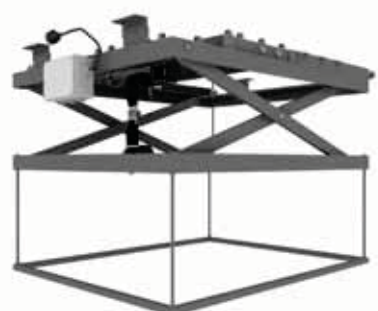

**Including 3rd service position**

**Optional ceiling finishing mask, Ref: P3733 (CFM-1070) see page 156**

Power supply: **230 VAC 50-60 Hz**

Ref.	P1984			
Overall stroke in mm	<b>700</b>			
Dimensions in mm	W 815 x D 1117 x H 185			
Number of scissors	1	Nett weight	67 Kg	
				Max. 300
Ref.	P3602			
Overall stroke in mm	<b>1522</b>			
Dimensions in mm	W 815 x D 1117 x H 235			
Number of scissors	2	Nett weight	71 Kg	
				Max. 300
Ref.	P3603			
Overall stroke in mm	<b>2100</b>			
Dimensions in mm	W 815 x D 1117 x H 255			
Number of scissors	3	Nett weight	75 Kg	
				Max. 290
Ref.	P3604			
Overall stroke in mm	<b>2800</b>			
Dimensions in mm	W 815 x D 1117 x H 285			
Number of scissors	4	Nett weight	79 Kg	
				Max. 280
Ref.	P3605			
Overall stroke in mm	<b>3500</b>			
Dimensions in mm	W 815 x D 1117 x H 315			
Number of scissors	5	Nett weight	83 Kg	
				Max. 270
Ref.	P3606			
Overall stroke in mm	<b>4200</b>			
Dimensions in mm	W 815 x D 1117 x H 345			
Number of scissors	6	Nett weight	87 Kg	
				Max. 260
Ref.	P3607			
Overall stroke in mm	<b>4900</b>			
Dimensions in mm	W 815 x D 1117 x H 375			
Number of scissors	7	Nett weight	91 Kg	
				Max. 250
Ref.	P3608			
Overall stroke in mm	<b>5600</b>			
Dimensions in mm	W 815 x D 1117 x H 420			
Number of scissors	8	Nett weight	95 Kg	
				Max. 240

**SCISSOR LIFT WITH INTEGRATED ROTA-KIT**Movable frame dimensions: **W 700 x D 700 mm**Power supply: **230 VAC 50-60 Hz****Ref.****P3310**

Overall stroke in mm

**1275**

Dimensions in mm

W 822 x D 811 x H 375

Number of scissors

2

Connectivity

Contact relay

Optional wall switch or IR/RF remote

**Ref.****P5357**

Overall stroke in mm

**2300**

Dimensions in mm

W 822 x D 811 x H 430

Number of scissors

4

Connectivity

Contact relay

Optional wall switch or IR/RF remote

**INTEGRATED CABLE GUIDANCE**

The ceiling lifts feature an integrated cable guidance system. This helps the cabling to stay in place and move smoothly, and prevents pinching when operating the lift.

**ACCESSORIES****PROJECTOR MOUNTS (SEE PAGE 125 FOR THE FULL PROGRAM)**

Mount any brand and type of projector on any Audipack system with the Audipack projector mounts.

**Quatro-Fix®****Brand related mounts****SILENCER MOUNTING BRACKET**

**P7010**  
PCL-1070 & 1090  
70 Kg



**P6491**  
1090  
125 Kg

**Ref.**  
Suitable for  
Max. weight

**CEILING LIFT SYSTEMS**
**CONNECTIVITY**

**Ref.**  
Description

**260214**  
IR remote (internal)


**260215**  
RF remote (internal)

**261318**  
Wall switch

**SERVICE HATCHES**

Internal hatch dimensions:  
430 x 430 mm

**INSTALLATION AID**

**SPACER FRAME**


With large internal spacings between the structural ceiling and false ceiling, it is better to use a spacer frame to position your Audipack product just above the false ceiling.

Installing your product with long windings or rods ends up in an unstable and flexible set-up. Using the spacer frame prevents choosing large lift systems with long travels and saves costs at the end.

**CEILING FINISHING MASK**

**Ref.**  
Suitable for

**P3136 (CFM-1060)**  
1060

**P3733 (CFM-1070)**  
1070

**P3732 (CFM-1090)**  
1090

**SHOCK ABSORBER, SET OF 4**


Absorbs disturbing vibrations caused by traffic, air conditioner systems etc.


**Ref.**
**P5547**



# ***Pulley service lift systems***

## ***for projectors***

***Integrate a projector in the ceiling,***

*for example, in a board room, auditorium or conference hall.*

*These lift systems are especially designed to lower projectors from the ceiling for fast maintenance in a safe and controlled manner.*



**Audipack®**

*It's great to have solutions...*

# Bring projectors to **service** height

## in **10** minutes...



**Save time and money by using the Audipack pulley lift systems**

These lift systems are especially designed to lower projectors from the ceiling for fast maintenance in a safe and controlled manner.

The projector receives power and data signals through special connectors, which are disconnected when it is lowered and which restore contact when the lift is fully retracted. You can even connect HD signals with the standard supplied connector sets.

Pulley lifts are equipped with safety hooks to secure the projector in the retracted position. The projector will return to this exact position in the ceiling thanks to four centring points on the lift, ensuring the correct position of the projected image.

All this contributes to a safer, more flexible way of presenting and servicing.

The combination lift systems are available as standard in two models, in different sizes and lifting capacities.

An Audipack projector mount is needed to fix the projector to the system.

### **Note:**

**For distribution HD signal use standard available "long distance HDMI twisted pair extender" solutions!**

- ▲ **Durable built**
- ▲ **Low maintance**
- ▲ **Quick installation**
- ▲ **Low noise engine**

### **Standard connector configuration**

#### **Top D-sub connector**


1-phase 230 V 16 A with 1 early make, late break ground pin

#### **Middle & lower connector**

6 coaxial contacts 75 Ohm

1 early make, late break ground pin

17 signal pins

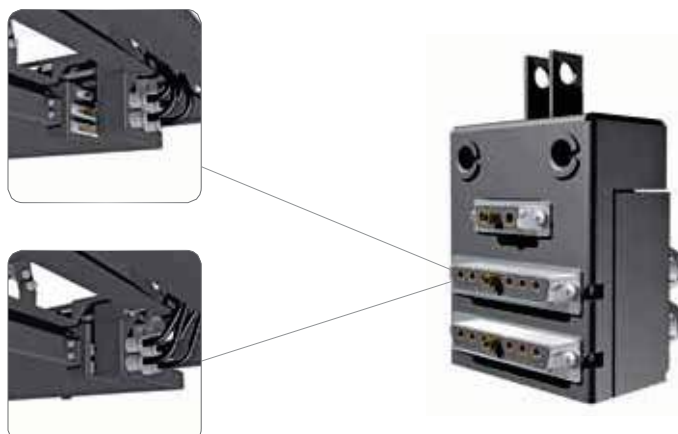

## SERVICE LIFT SYSTEMS

**Ref.****P2687**

Dimensions in mm.  
Max. projector size in mm  
Max. service stroke in mm  
Number of cables

W 400 x D 630 x H 225  
W 500 x D 600  
**4000**  
2

**Ref.****P2271**

Dimensions in mm.  
Max. projector size in mm  
Max. service stroke in mm  
Number of cables

W 770 x D 980 x H 230  
W 650 x D 800  
**6000**  
4



Connectivity

Contact relay

Power supply: **230 VAC 50-60 Hz**

## SERVICE AND SCISSOR COMBINATION LIFT SYSTEMS

Connectivity: Contact relay  
Optional wall switch or  
IR/RF remote (not for service stroke)

**Ref.****P1678**

Dimensions in mm.  
Max. scissor stroke in mm  
Number of scissors  
Max. service stroke in mm  
Number of cables

W 762 x D 770 x H 265  
**1070**  
2  
**4000 mm**  
2

**Ref.****P3802**

Dimensions in mm.  
Max. scissor stroke in mm  
Number of scissors  
Max. service stroke in mm  
Number of cables

W 762 x D 770 x H 305  
**2085**  
4  
**4000 mm**  
2

**Ref.****P3804**

Dimensions in mm.  
Max. scissor stroke in mm  
Number of scissors  
Max. service stroke in mm  
Number of cables

W 762 x D 770 x H 385  
**3100**  
6  
**4000 mm**  
2

Max. projector size **W 500 x D 600 mm**

Connectivity: Contact relay  
Optional wall switch or  
IR/RF remote (not for service stroke)

**Ref.****P2685**

Dimensions in mm  
Max. scissor stroke in mm  
Number of scissors  
Max. service stroke in mm  
Number of cables

W 976 x D 770 x H 305  
**700**  
1  
**6000 mm**  
4

**Ref.****P3806**

Dimensions in mm  
Max. scissor stroke in mm  
Number of scissors  
Max. service stroke in mm  
Number of cables

W 976 x D 770 x H 305  
**1400**  
2  
**6000 mm**  
4

**Ref.****P3808**

Dimensions in mm  
Max. scissor stroke in mm  
Number of scissors  
Max. service stroke in mm  
Number of cables

W 976 x D 770 x H 305  
**2800**  
4  
**6000 mm**  
4

**Ref.****P3810**

Dimensions in mm  
Max. scissor stroke in mm  
Number of scissors  
Max. service stroke in mm  
Number of cables

W 976 x D 770 x H 305  
**4200**  
6  
**6000 mm**  
4

**Ref.****P3812**

Dimensions in mm  
Max. scissor stroke in mm  
Number of scissors  
Max. service stroke in mm  
Number of cables

W 976 x D 770 x H 305  
**5600**  
8  
**6000 mm**  
4

Max. projector size **W 650 x D 800 mm**Power supply: **230 VAC 50-60 Hz**



## PULLEY SERVICE LIFT SYSTEMS

## ACCESSORIES

## PROJECTOR MOUNTS (SEE PAGE 125 FOR THE FULL PROGRAM)

Mount any brand and type of projector on any Audipack system with the Audipack projector mounts.



Quatro-Fix®



Brand related mounts



## CEILING FINISHING



**Ref.**  
Suitable for

**P5341**  
P1678, P3802

## CONNECTIVITY



**260214**  
IR remote control (internal)

**260215**  
RF remote control (internal)

**261318**  
Wall switch

## SERVICE HATCHES

Internal hatch dimensions:  
430 x 430 mm



**Ref.** **P1913**  
Type Service hatch for normal ceilings

**P5066**  
Service hatch for plastered ceilings


## INSTALLATION AID



**Ref.**  
Suitable for

**P5047**  
P2687, P3285, P1678

## SPACER FRAME



With large internal spaces between the structural ceiling and false ceiling, it is better to use a spacer frame to position your Audipack product just above the false ceiling.

Installing your product with long windings or rods ends up in an unstable and flexible set-up. Using the spacer frame prevents choosing large lift systems with long distances and saves costs in the end.



# Mirror-Kit systems

## for projectors

### **Mirror-Kit systems for projectors**

**For the integration of projectors in the ceiling,**

*for example in the board room, home cinema, auditorium or conference hall.*

*The interior finish looks more streamlined with the projector out of sight – and the noise is reduced*



**Audipack®**

*It's great to have solutions...*

# **Integration of a projector** **into the Ceiling...**

**or in a cabinet or table, so that the projector is out of sight and less audible!**

The Mirror-Kit is a practical and durable solution for the integration of a projector into the ceiling. For example in a boardroom, home cinema, auditorium or conference hall.


The projector is fixed permanently above the ceiling, resulting in less noise to detract from the presentation and invisibility of the projector.

Audipack Mirror-Kits are available in various dimensions and versions. They are available in dynamic (motorised) and static (non-motorised) versions.



## **How does it work**

The Mirror-Kit works like a periscope. The projected image from the projector is deflected by two highly reflective mirrors onto the projection screen. The larger, lower mirror is motorised and can be activated by a general control system.

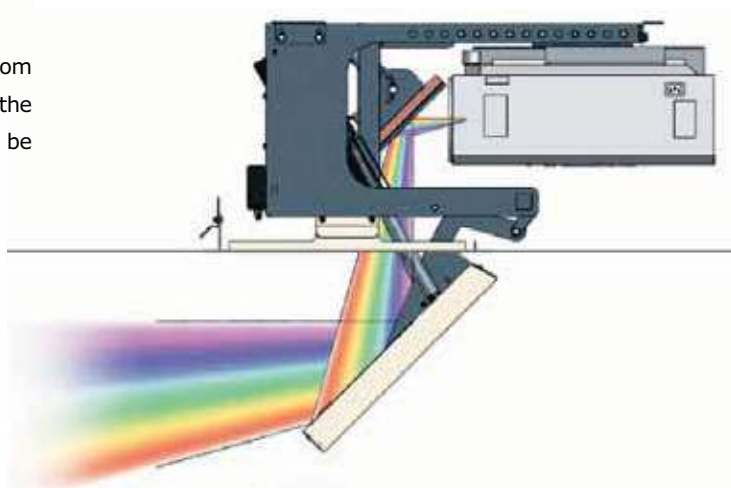

- ▲ **Motorized table and ceiling versions**
- ▲ **Static ceiling versions**
- ▲ **Quick installation**
- ▲ **Low noise engine**



Table Mirror-Kit versions  
available



Standard ceiling finishing






Special projection mirror




## WIDE SCREEN MOTORIZED CEILING MIRROR-KITS









Power supply:

110-230 VAC 50-60 Hz/24 VDC

Ref.	MKT-150WS	
Dimensions in mm	W 620 x D 741 x H 368	  
Max. projector dimensions in mm	W 500 x D 600 x H 150	
Min. allowed lens ratio from approx.	1.3:1	
Nett weight	35 Kg	
Aspect ratio	4:3, 16:10	
Connectivity	Contact relay, RS-232, Optional: wall switch or IR/RF remote	




Ref.	MKT-200WS	
Dimensions in mm	W 660 x D 751 x H 418	  
Max. projector dimensions in mm	W 500 x D 600 x H 200	
Min. allowed lens ratio from approx.	1.3:1	
Nett weight	37 Kg	
Aspect ratio	4:3, 16:10	
Connectivity	Contact relay, RS-232, Optional: wall switch or IR/RF remote	

Ref.	MKT-250WS	
Dimensions in mm	W 650 x D 751 x H 470	  
Max. projector dimensions in mm	W 550 x D 650 x H 250	
Min. allowed lens ratio from approx.	1.3:1	
Nett weight	26 Kg	
Aspect ratio	4:3, 16:10	
Connectivity	Contact relay, RS-232, Optional: wall switch or IR/RF remote	

Ref.	MKT-265WS	
Dimensions in mm	W 735 x D 1040 x H 500	  
Max. projector dimensions in mm	W 600 x D 650 x H 265	
Min. allowed lens ratio from approx.	1.3:1	
Nett weight	60 Kg	
Aspect ratio	4:3, 16:10	
Connectivity	Contact relay, RS-232, Optional: wall switch or IR/RF remote	



## COMPACT MOTORIZED MIRROR-KIT









Ref.	MKT-C150	
Dimensions in mm	W 560 x D 790 x H 211	  
Max. projector dimensions in mm	W 465 x D 450 x H 150	
Min. allowed lens ratio from approx.	1.3:1	
Aspect ratio	4:3, 16:10	
Connectivity	Contact relay, RS-232 Optional wall switch or IR/RF remote	

## MOTORIZED MIRROR-KITS FOR CABINET OR TABLE MOUNTING



Ref.	MKT-155T vertical	
Dimensions in mm	W 400 x D 462 x H 399	 
Max. projector dimensions in mm	W 400 x D 400 x H 155	
Nett weight	15 Kg	
Aspect ratio	4:3	
Connectivity	Contact relay, Optional: wall switch or IR/RF remote	

Ref.	MKT-150T	
Dimensions in mm	W 562 x D 665 x H 353	  
Max. projector dimensions in mm	W 500 x D 600 x H 150	
Min. allowed lens ratio from approx.	1.3:1 (4:3) and 1.8:1 (16:9)	
Nett weight	31 Kg	
Connectivity	Contact relay, RS-232, Optional: wall switch or IR/RF remote	

Ref.	MKT-200T	
Dimensions in mm	W 590 x D 705 x H 402	  
Max. projector dimensions in mm	W 500 x D 600 x H 200	
Min. allowed lens ratio from approx.	1.3:1 (4:3) and 1.8:1 (16:9)	
Nett weight	33 Kg	
Connectivity	Contact relay, RS-232, Optional: wall switch or IR/RF remote	

Power supply:

110-230 VAC 50-60 Hz/24 VDC

## MIRROR-KIT SYSTEMS

## STATIC CEILING MIRROR-KITS (NON-MOTORIZED)



Ref.	MKT-S195
Dimensions in mm	W 415 x D 555 x H 325
Mirror dimensions	Square W 300 x H 250
Min. / Max. projector height in mm	95 / 195
Max. allowed lens ratio from aprox.	1.3:1
Nett weight	8 Kg
Aspect ratio	4:3, 16:10



Ref.	P1792*
Dimensions in mm	W 150 x D 150 x H 480
Mirror dimensions	Oval - W 150 x H 200
Min. / Max. projector height in mm	95 / 200
Nett weight	12 Kg
Aspect ratio	4:3, 16:10



Ref.	P2883*
Dimensions in mm	W 150 x D 150 x H 480
Mirror dimensions	Square W 250 x H 250
Min. / Max. projector height in mm	95 / 200
Nett weight	12 Kg
Aspect ratio	4:3, 16:10



\* The projector is mounted vertically and must be able to work in that position

## FLOOR PROJECTION UNIT



Ref.	P2817
Dimensions in mm	W 465 x D 250 x H 225-260
Mirror dimensions in mm	Square W 200 x H 200
Nett weight	10 Kg
Aspect ratio	4:3, 16:10
Max. lens offset in mm	90



To be used with the Audipack ceiling mounts **390061** and **390065**, page 129.

## ACCESSORIES

## PROJECTOR MOUNTS

SEE PAGE 125 FOR THE FULL PROGRAM



Quatro-Fix®



Brand related mounts

## INSTALLATION AID



P5048

## SERVICE HATCHES

Internal hatch dimensions:  
430 x 430 mm



**Ref. P1913**  
Type Service hatch for normal ceilings

**Ref. P5066**  
Type Service hatch for plastered ceilings

## CONNECTIVITY



**260214**  
IR remote control (internal)

**260215**  
RF remote control (internal)

**261318**  
Wall switch



# ***Pop up lift systems***

## ***for projectors***

### ***The Audipack projector Pop Up lift system***

*lets your projector pop up out of your desk, cabinet or table*



**Audipack®**

*It's great to have solutions...*

# Projector **Pop up** lift systems

for your **convenience**



**Why not integrate your projector into the table and lift it if from below when needed?**

A projector is essential in any conference table boardroom or home cinema. However it's not always in use and can get in the way, or be tempting to steal, when not needed.

Audipack projector Pop Up lift systems are the easy to install solution for this problem. They are available in three different sizes and are fully positioning.

To control the system other than relays contact, please select from the below list.

**Ref. 260214** (Internal IR remote control set)

**Ref. 260215** (Internal RF remote control set)







**Ref. 261318** (Wall switch)

- ▲ **Plug & Play**
- ▲ **Low maintenance**
- ▲ **Quick installation**
- ▲ **Silent motor drive**

## PROJECTOR POP UP LIFT SYSTEMS




Power supply:  
**110-230 VAC 50-60 Hz/24 VDC**

<b>Ref.</b>	<b>M-1-400</b>	
Max. stroke in mm	400	
Projector platform in mm	W 400 x D 500	
Construction height in mm	150	
Number of scissors	1	
		 
<b>Ref.</b>	<b>M-1-500</b>	
Max. stroke in mm	500	
Projector platform in mm	W 400 x D 600	
Construction height in mm	150	
Number of scissors	1	
		 
<b>Ref.</b>	<b>M-2-900</b>	
Max. stroke in mm	900	
Projector platform in mm	W 400 x D 600	
Construction height in mm	250	
Number of scissors	2	
		 

# ***Liftomatic® rental systems***

## ***for projectors***

***Above the crowd - with the Audipack Liftomatic®***

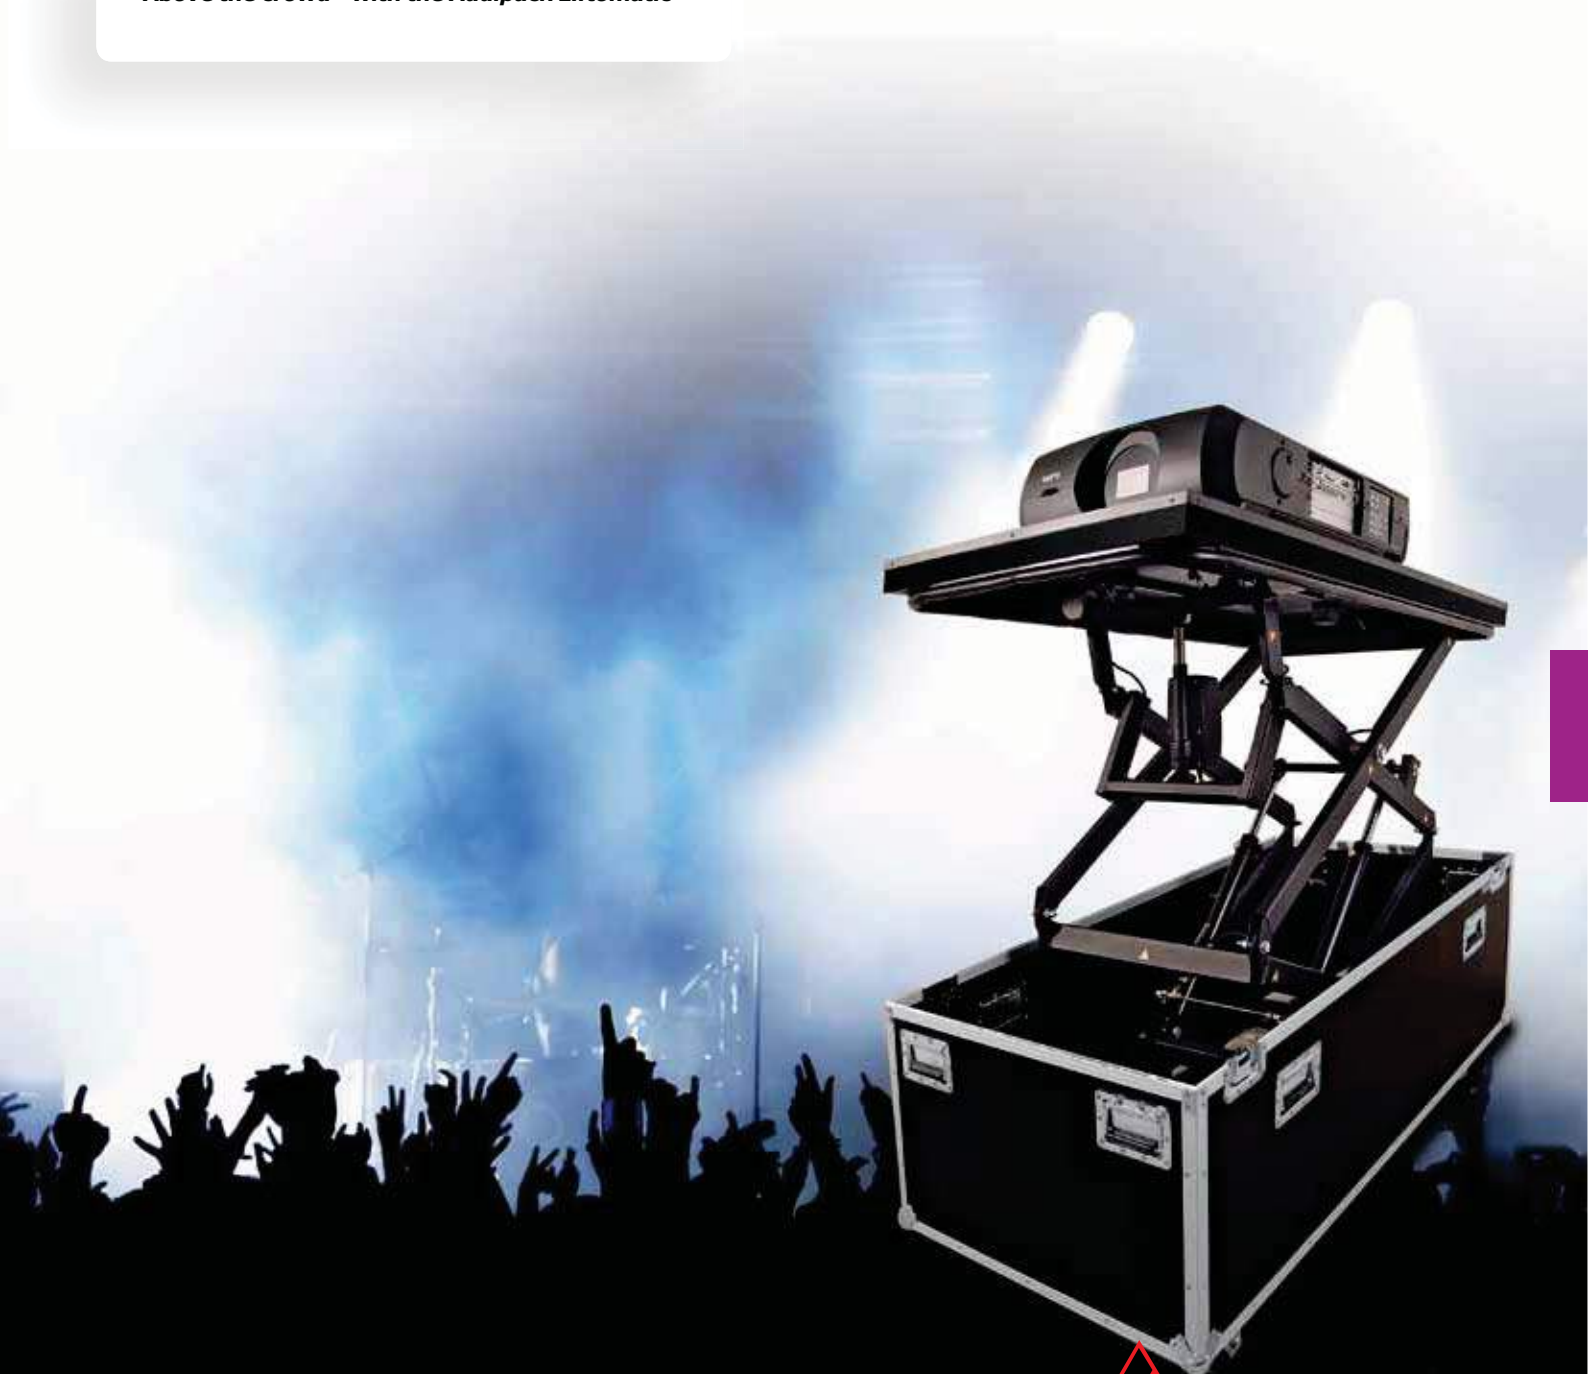

**Audipack®**

*It's great to have solutions...*

# Ease of *transport*,

# ease of *Presentation!*



- ▲ **Anti pinching security device**
- ▲ **Electric platform angle adjustment**
- ▲ **Low maintenance**
- ▲ **Supplied with rigid brake/swivel castors**

**Liftomatics are the ideal all-in-one solution for transporting, lifting and presenting.**

The only effort required is to remove the lid and connect the Liftomatic to a power outlet. The integrated lift raises the projector to its presentation position.

Using the Liftomatic reduces the risk of personal injury and equipment damage, as well as the time needed for installation. The integrated electric platform tilt mechanism allows the projector to be lined up perfectly with the projection screen.



Integrated stabilizer  
(Liftomatic HE-3000)



Control panel

## MANUAL LIFTOMATIC®



Ref.	HM-2000
Max. lift height in mm	2000
Platform size in mm	W 520 x D 1010
Number of scissors	2




Accessory compartment



Manual pump

## LIFTOMATIC RENTAL SYSTEMS, ELECTRIC HYDRAULIC

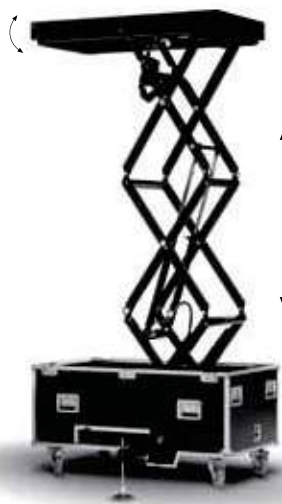

Ref.	T-1900
Max. lift height in mm	2050
Platform size in mm	W 640 x D 1030
Stabilizers	no
Number of scissors	2
Angle adjustment	-2 to +10 degrees



Ref.	HE-2000
Max. lift height in mm	2250
Platform size in mm	W 720 x D 1290
Stabilizers	no
Number of scissors	2
Angle adjustment	-2 to +10 degrees



Ref.	HE-3000
Max. lift height in mm	3000
Platform size in mm	W 720 x D 1290
Stabilizers	yes
Number of scissors	3
Angle adjustment	-2 to +10 degrees





# ***Rota-Kit<sup>®</sup>***

***rotates your projector***

***The Rota-Kit,***

*helps you position your projector in any direction with  
just one push of a button*



**Audipack<sup>®</sup>**

*It's great to have solutions...*

# Rotate your projector

## in every direction



**Turn any room into a multi-functional space by rotating your projector.**

Rota-Kit is an electric rotating system with 4 freely reprogrammable pre-set positions.

A contact control allows the projector to be rotated to one of the four preset positions, for flexibility of the projection direction.

The Rota-Kit comes in three standard versions, with different tube lengths.

- ▲ **Accurate repositioning**
- ▲ **Compact system dimensions**
- ▲ **Slow start and slow stop motion**
- ▲ **Available in several lengths**

## ACCESSORIES

To control the system other than through relay contact:

**Ref. 260214** (Internal IR remote control set, 2 positions)

**Ref. 260215** (Internal RF remote control set, 2 positions)

**Ref. 261227** (External IR remote control set, 4 positions)

**Ref. 261228** (External RF remote control set, 4 positions)

**Ref. P3660**

Installation aid for accurate installation  
Also suitable for metal supported ceilings



To install your projector to an Audipack product an additional projector mount is needed.  
See "Projector mounts" section on page 129 for an overview of the available projector mounts.

## ROTA-KIT

Connectivity: Contact relay, RS-232  
Optional IR/RF remote



Power supply:

**110-230 VAC 50-60 Hz/24 VDC**

### Ref. PRK-250

Built-in height in mm	<b>200</b>
Tube length in mm	50
Dimensions in mm	W 373,3 x D 332 x H 250



### Ref. PRK-500

Built-in height in mm	<b>200</b>
Tube length in mm	300
Dimensions in mm	W 373,3 x D 332 x H 500



### Ref. PRK-750

Built-in height in mm	<b>200</b>
Tube length in mm	550
Dimensions in mm	W 373,3 x D 332 x H 750



# Tablet

## housings

### **Tablet housings,**

*protect your tablets against theft during  
rental or when installed in public places*



**Audipack®**

*It's great to have solutions...*

# Tablets in public places

## and in *rental* applications

### Protect your tablets in public places

This tablet casing is the perfect way to cover, finish and protect tablet PCs in public places and retail outlets.

The Audipack solutions provide both a standard and customisable display that can be installed in various environments. Install it directly into the wall or have it free standing on the floor, for example in car showrooms or stores. The quality high-grade finishing gives this product a luxury appearance.

Most importantly, the casing does not interfere with Wi-Fi functionality, and the product is invisible when fitted.

*It's great to have solutions.*



- ▲ **Wi-Fi accessible**
- ▲ **Invisible locking system**
- ▲ **High level finishing**
- ▲ **Available in 3 standard colours, others on request**
- ▲ **Integrated cable management**
- ▲ **Standard VESA mounting interface**

One of the best finishes you can get, these TC cabinets are well built anti-theft casings with a very high quality finish. The modern design combines with practicality – the tablet, including power cable, is completely concealed in the casing, and will not affect Wi-Fi functionality.



Easy tablet access with invisible locking system



Easy presentation solution








High level finishing



NEW light weight metal theft delay housing





## TABLET HOUSINGS, SYMMETRIC MODELS



	<b>Ref.</b>	<b>TCS-IPad</b>	<b>TCS-IPad-H</b>	
	Dimensions in mm	W 220 x D 22 x H 360	W 220 x D 22 x H 360	
	External access	none	Home button & camera	
	Suitable for	IPad 2, 3 and 4	IPad 2, 3 and 4	
	Mounting interface	VESA 75 & 100	VESA 75 & 100	
	Audipack Ball joint mount ( <b>BJ-1</b> ) See <a href="http://www.audipack.com">www.audipack.com</a> for updated product list			
	<b>Ref.</b>	<b>TCS-IPadAir</b>	<b>TCS-IPadAir-H</b>	
	Dimensions in mm	W 220 x D 23 x H 360	W 220 x D 23 x H 360	
	External access	none	Home button & camera	
	Suitable for	IPad Air 1 & 2	IPad Air 1 & 2	
	Mounting interface	VESA 75 & 100	VESA 75 & 100	
	Audipack Ball joint mounting ( <b>BJ-1</b> ) See <a href="http://www.audipack.com">www.audipack.com</a> for updated product list			
	<b>Ref.</b>	<b>TCS-IPadMini</b>	<b>TCS-IPadMini-H</b>	
	Dimensions in mm	W 170 x D 22 x H 290	W 170 x D 22 x H 290	
	External access	none	Home button & camera	
	Suitable for	IPad Mini 1,2,3,4	IPad Mini 1,2,3,4	
	Mounting interface	VESA 75 & 100	VESA 75 & 100	
	Audipack Ball joint mounting ( <b>BJ-1</b> ) See <a href="http://www.audipack.com">www.audipack.com</a> for updated product list			
	<b>Ref.</b>	<b>TC-Galaxy 10.1</b>		
	Dimensions in mm	W 356 x D 22 x H 238		
	External access	Home button & camera		
	Suitable for	Samsung Galaxy 10.1		
	Mounting interface	VESA 75 & 100		
	Audipack Ball joint mounting ( <b>BJ-1</b> ) See <a href="http://www.audipack.com">www.audipack.com</a> for updated product list			



## TABLET HOUSINGS - ALU

The TC-A, a light weight model, cost effective and easy to adapt and install in retail and digital signage purposes.



<b>Ref.</b>	<b>TC-IPad-A</b>		
Dimensions in mm	W 220 x D 22 x H 321		
External access	none		
Suitable for	IPad 2, 3 and 4		
Mounting interface	VESA 75 & 100 Audipack Ball joint mount ( <b>BJ-1</b> )		

<b>Ref.</b>	<b>TC-IPad-HA</b>		
Dimensions in mm	W 220 x D 22 x H 321		
External access	Home button & camera		
Suitable for	IPad 2, 3 and 4		
Mounting interface	VESA 75 & 100 Audipack Ball joint mount ( <b>BJ-1</b> )		

<b>Ref.</b>	<b>TC-IPadAIR-HA</b>		
Dimensions in mm	W 220 x D 22 x H 320		
External access	Home button & camera		
Suitable for	IPad Air, IPad Air 2		
Mounting interface	VESA 75 & 100 Audipack Ball joint mount ( <b>BJ-1</b> )		

## ACCESSORIES

### UNIVERSAL WALL MOUNT WITH ANGLE ADJUSTMENT



Wall offset: 45 mm  
Angle adjustment -15 / +15 degrees



Ref.

BJ-1

### FLOOR STAND



Ref.

FS-TC950

### DESK MOUNT



Ref.

DMV-0500

DM-TC100

TS-TC150

### TRANSPORT CASE FOR 5 TABLET CABINETS



Suitable for 5 TC-IPad cabinets

Ref.

PK-TC5

# ***Video conference***

## ***solutions***

### ***Video conference solutions***

*Communication was never easier than with the Audipack videoconferencing solutions. Furniture, camera drawers, camera lift systems for every situation ideal solution*



**Audipack®**

*It's great to have solutions...*

Let's

# Communicate...

...with an Audipack video conference solution. Audipack video conferencing solutions are a great addition to your boardroom.



## The video conference furniture

**VCF-SL** series: A slim and solid furniture available for 1 or 2 screens and 1 camera. Equipment is easy installed behind the removable rear panel, internal cables can be neatly organized.

### Included:

Camera mount

Codec mount

Equipment mount



### Optional:

Soundbar mounting brackets, (below screen installation)

19" codec mounting set

Passive Audipack sound bar (in cabinet installation)



## The video conference floor stands

These versions are based on the standard 700 and 900 series floor stands (700 series page 9 and 900 series page 21).

Besides the fixed models, there are quick release models available that are ideal for rental purposes.

## The video conference camera lift systems or drawers

Perfect solutions for installing and hiding cameras in furniture or a wall. With a push of a button the camera silently reveals itself.

- ▲ **Suitable for any brand flat panel, camera and codec**
- ▲ **Modern and timeless design**
- ▲ **Generous access by removable rear panel to all the equipment (VCF-SL)**
- ▲ **Custom solutions available on request**




Many practical accessories included (VCF-SL)



Very stylish designed (VCF-SL)



Very stylish designed (VCF-SL)



Generous access by removable rear panel



## VIDEO CONFERENCE FURNITURE

**Ref.****VCF-SL1**

Dimensions in mm

W 970 x D 600 x H 1647

Suitable for

1 screen

Presentation height (centre screen)

Min. 1282 mm - Max. 1476 mm

Mounting interface

VESA 300 x 300, 400 x 200, 400 x 400,  
600 x 200, 600 x 400 and L&S 5

(larger screens possible)

Inside cabinet dimensions in mm

W 584 x D 200

Included

**VCF-SL-CP**, Camera mount**VCF-SL-CM**, Codec mount**VCF-SL-UMP**, Universal equipment mount

Optional

**VCF-SL-SBB**, Soundbar mounting brackets (below screen installation)**VCF-SL-SB**, Audipack passive soundbar (in cabinet installation)**VCF-SL-3U**, 19 inch, 3U equipment mount**Ref.****VCF-SL2**

Dimensions in mm

W 1774 x D 600 x H 1647

Suitable for

2 screens (max. screen width 1270 mm)

Presentation height (centre screen)

Min. 1288 mm - Max. 1502 mm

Max. mounting range in mm

W 600 x H 446

Inside cabinet dimensions in mm

W 584 x D 200

**Ref.****VCF-SL2-XL**

Dimensions in mm

W 1774 x D 600 x H 1647

Suitable for

2 screens (max. screen width 1550 mm)

Presentation height (centre screen)

Min. 1288 mm - Max. 1502 mm

Max. mounting range in mm

W 600 x H 446

Inside cabinet dimensions in mm

W 584 x D 200



Included

**VCF-SL-CP**, Camera mount**VCF-SL-CM**, Codec mount**VCF-SL-UMP**, Universal equipment mount

Optional

**VCF-SL-SBB**, Soundbar mounting brackets (below screen installation)**VCF-SL-SB**, Audipack passive soundbar (in cabinet installation)**VCF-SL-3U**, 19 inch, 3U equipment mount

## CAMERA LIFT

**Ref.****P5110**

Max. camera dimensions in mm

W 190 x D 250 x H 220

Stroke in mm

320

Camera shape

Round camera's

Connectivity

Contact relay

Optional wall switch &amp; IR/RF remote

Power supply

110-230 VAC 50-60 Hz/24 VDC

Custom models available on request



## CAMERA LIFT SYSTEMS



Power supply:

**110-230 VAC 50-60 Hz/24 VDC****Ref.****P5414**

Dimensions in mm

W 400 x D 200 x H 751-1426

Max. camera dimensions in mm

W 245 x D 180 x H 155

Stroke in mm

675

Connectivity

Contact relay

**Ref.****P5466**

Dimensions in mm

W 360 x D 245 x H 778-1453

Max. camera dimensions in mm

W 296 x D 180 x H 181

Stroke in mm

675

Connectivity

Contact relay

Optional wall switch &amp; IR/RF remote




## VIDEO CONFERENCING DOUBLE COLUMN FLOOR STANDS (700 SERIES)



### Ref. 390766


Dimensions in mm	W 900 x D 560 x H 1804
Max. screen width in mm	720-1100
Nett weight	60 kg
Tilt adjustment in degrees	-2° / +2°



### Ref. 390767


Dimensions in mm	W 900 x D 560 x H 1812
Max. screen width in mm	720-1100
Nett weight	71 kg
Tilt adjustment in degrees	-2° / +2°

**Quick Release**  
No tools required



### Ref. 390785


Dimensions in mm	W 900 x D 560 x H 1804
Max. screen width in mm	910-1510
Nett weight	65 kg
Tilt adjustment in degrees	-2° / +2°



### Ref. 390786

Dimensions in mm	W 900 x D 560 x H 1812
Max. screen width in mm	910-1510
Nett weight	76 kg
Tilt adjustment in degrees	-2° / +2°

**Quick Release**  
No tools required




\* The actual max. screen inches are determined by the "max. screen width" limits.

## VIDEO CONFERENCING SINGLE COLUMN FLOOR STANDS (900 SERIES)



### Ref. 390976

Dimensions in mm	W 900 x D 560 x H 1804
Max. screen width in mm	720-1100
Nett weight	60 kg
Tilt adjustment in degrees	-2° / +2°



### Ref. 390977


Dimensions in mm	W 900 x D 560 x H 1812
Max. screen width in mm	720-1100
Nett weight	71 kg
Tilt adjustment in degrees	-2° / +2°

**Quick Release**  
No tools required



### Ref. 390985


Dimensions in mm	W 900 x D 560 x H 1804
Max. screen width in mm	910-1510
Nett weight	65 kg
Tilt adjustment in degrees	-2° / +2°



### Ref. 390986

Dimensions in mm	W 900 x D 560 x H 1812
Max. screen width in mm	910-1510
Nett weight	76 kg
Tilt adjustment in degrees	-2° / +2°

**Quick Release**  
No tools required



\* The actual max. screen inches are determined by the "max. screen width" limits.

## ACCESSORIES

### INTERNAL SOUNDBAR SYSTEM

	Optional for video conference furniture VCF-SL1 & VCF-SL2	
<b>Ref.</b> Description Max. power	<b>LSS-SB20</b> mono internal soundbar 1 x 30 Watt RMS	<b>LSS-SB40</b> stereo internal soundbar 2 x 20 Watt RMS

### EQUIPMENT INSTALLATION ACCESSORIES

Mounting equipment for video conference furniture VCF-SL1 & VCF-SL2

			
<b>VCF-SL-CM</b> Universal mounting set for a codec	<b>VCF-SL-3U</b> 19 inch/3U mounting set	<b>VCF-SL-UMP</b> Mounting plate for additional equipment	<b>VCF-SL-SBB</b> Universal external sound bar mounting set

### MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 43 FOR THE FULL PROGRAM)

See "Mounting brackets for flat panels" for the full program see page 43

			
Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.	<b>Universal mounts</b>	<b>Brand related mounts</b>	<b>VESA mounts</b>






### MOUNTING CAMS FOR DIRECT VESA MOUNTING

### FOR RECESSED MOUNTING HOLES





					
<b>Ref.</b>	<b>392618</b> M6x13	<b>392318</b> M8x13	<b>390618</b> M10x13	<b>392621</b> M6x35	<b>392620</b> M8x35

## VIDEO CONFERENCE SOLUTIONS

## LAPTOP SUPPORTS (SUITABLE FOR VC FLOOR STANDS)

	Suitable for single column floor stands		Suitable for double column floor stands	
				
<b>Ref.</b> Max. equipment dimensions in mm	<b>390915</b> W 300 x D 250	<b>390916</b> W 450 x D 350	<b>390715</b> W 300 x D 250	<b>390716</b> W 450 x D 350

## CAMERA SUPPORTS (SUITABLE FOR VC FLOOR STANDS)



	Suitable for single column floor stands		Suitable for double column floor stands	
				
<b>Ref.</b> Dimensions in mm	<b>390931</b> W 250 x D 250		<b>390738</b> W 200 x D 255	

## EQUIPMENT HOUSINGS

NEW

Housing for Mac Mini, universal media player, Barco clickshare mini  Mounting interface: L&S 5				
	<b>EC-1</b> W 200 x D 48 x H 200		<b>EC-1AC</b> ((incl. 3-way power strip F, CEE 7/4) W 200 x D 48 x H 200	
<b>Ref.</b> Max. dimensions equipment in mm				

## CONNECTIVITY

			
<b>Ref.</b> Description Suitable for	<b>260218</b> IR remote (external) P5110, P5655, P5414, P5466	<b>260219</b> RF remote (external) P5110, P5655	<b>460286</b> RF remote P5414, P5466



# Transport- and Flightcases

**Audipack specialises in manufacturing transport and flight cases for all kinds of products.**

*For rental and staging, endurance sports, events or personal use. Large flat panel, LED walls and other audio visual equipment, sales representative demo sets or professional racing teams. Anything is possible.*



FLIGHTCASES  
MOERKAPPELLE  
HOLLAND  
Audipack TEL +31 (0) 178 1981 671



**Audipack®**

*It's great to have solutions...*

# Audipack - the No.1

## flightcase manufacturer

**All Audipack flight cases are custom made and are available as a one off or series production.**

Special features such as motorised or hydraulic lift systems and shock absorbers can be integrated into cases, which can even be made water resistant if required. All cases can be finished in specific colours with special graphics or logos to reinforce a corporate image.

**The interior** of a transport or flight case is one of the most important factors for the safe transport of your product. The ease of inserting and removing the item from the case is essential to its ergonomics. Audipack is an expert in creating advanced interiors. Audipack interiors are used in our own cases but can also be used in other case shells.

For the AV market Audipack has a vast range of case designs for all brands of flat panel, projectors, mixers and other equipment. Flight and transport cases can be designed to your precise requirements, and to match other Audipack accessories. Audipack is unique in offering several different types of custom-made flight and transport cases.



Flight case for 105 inch curved screen



## PACKER®



The Packer is the top of the range in small, ultra-light, custom made portable cases. The perfect solution for transportation, presentation and demonstration of fragile or valuable products.

Max. load 8 kg  
Available as transport case  
Panel thickness 4 mm



## TOPLINE®



The TOPLINE is a light and stylish case and offers the strength and durability normally associated with a conventional transport- and flightcase.

Max. load 35 kg  
Available as transport- and flightcase  
Panel thickness 7 mm



## SOLID FRAME SF7



The SF7 also known as the Solid frame 7 is comparable with the construction method of the Topline Flightcase only suited with metal corner parts and finishings.

Max. load 35 kg  
Available as transport- and flightcase  
Panel thickness 7 mm



## HEAVY DUTY FLIGHTCASES



This range of flightcases is mainly used in AV rental and pro-audio applications. From LED video walls to high end video camera's; the Audipack heavy duty flightcases stand for their job.

Available as transport- and flightcase  
Panel thickness 7-10-16-19 mm, depends on load



Type B	Type BK	Type E	Type K	Type KM
Hinged lid on top	Detachable lids on top, front and back	Detachable lid on top, low body	Detachable lids on front and back	Detachable lids on top, front and back
Type L	Type M	Type J	Type JM	Type T
Detachable lid on front with loading ramp	Detachable lid on top, high body	Detachable lid on front	Detachable lid on top and front	Detachable and dividable lid on top



## Audipack flightcase colours, *samples are available on request*

### Standard colours



### Colours against additional costs



Smooth surface



Mandarine grain surface

The structure of the colour laminates is smooth.

Black and dark grey are available in smooth and mandarine grain versions.

### There are several options for supporting corporate identities:

#### Screening

Audipack offers logo screening onto any size of case. The in-house silk screening process is incorporated into the manufacture of the case. A wide range of colour options, and 3-colour screening per image is available.



#### Engraving

An alternative way of displaying your company logo or safety symbols is engraving. With a CNC controlled production method, we can engrave directly onto the panels of the case. The advantage of this method is that the engraving is less prone to scratching. Engraving in a coloured finish is available.



#### Stickers

Audipack also offers custom vinyl stickers and digitally printed logos. Either supply us with the artwork or let us design it for you. From custom graphics to simple warning signs, we have the experience to design and apply with almost limitless design and colour options.





# AV Furniture

**Audipack has an in-house furniture department**

*creating everything that offers added value for  
boardrooms and interiors*



**Audipack®**

*it's great to have solutions...*

## Project line **AV furniture**



***Audipack Project-Line furniture has been one of Audipack's specialisms for many years.***

The Project-Line furniture range is individually designed, exclusively for you. Ideal whether you are looking for a single unique item or decorating the interior of an entire studio. Available as individual pieces or as a series.

Audipack specialises in high-quality commercial, studio and office furniture and can supply boardroom tables, commercial furniture, product displays, lecture stands and much more.

Design, functionality and durability are the main benefits. All furniture is manufactured to your individual taste and style and your requirements are our priority. We will incorporate any suggestions, shapes or designs to meet our customer's expectations.

Combine different facilities and standard or customised Audipack products to create a plug and play product such as furniture with built-in flat panel lift, video conferencing systems, or hideaways.



- ▲ **25 years of experience in furniture manufacturing**
- ▲ **Highly skilled timber craftsmen create custom design furniture of finest quality**
- ▲ **Installation on site can be performed to achieve maximum result.**



# ***Silent series***

## ***interpreter booths***

*The highest ISO standards and requirements as requested by users, have resulted in the Audipack "Silent Series" interpreter booths. The Silent Series consists of four versions, the Silent 6300, the Silent 9300, 9400 and 9500. All versions are fully transportable in an optional flightcase.*



**Audipack®**

*It's great to have solutions...*



# The **Silent Series** is **easy and quick to install**



***For effective interpretation, silence is required.***

***The best solution is an Audipack interpreter booth.***

In developing these booths, Audipack has paid full attention to a number of requirements e.g. flexibility, weight, good looks, high-quality materials, ease of use and durability. The scratch resistant surface combined with anodised aluminium frame, gives an attractive and professional appearance.

The Silent Series is easy and fast to install.

One person can do the job. Connection of one section to another is achieved using special locks.

All elements and panels are interchangeable, so there is no difficulty in adapting the construction to local conditions. Even the door can be placed on any side. The roof elements are connected to each other in the same way as the wall, resulting in a safe and solid construction.

All Audipack interpreter booths are officially tested.

- ▲ ***Panoramic view windows***
- ▲ ***Advanced cable management***
- ▲ ***Quick installation***
- ▲ ***ISO 4043 approved***





## 6300 SILENT SERIES, ISO 4043



### Ref.

External dimensions in mm

Internal dimensions

Weight incl. safety glass and table

Colour

Sound insulation capacity

Number of booth parts incl. table and floor

Table dimensions in mm

Including floor

Ventilation

Optional

### P1483

W 1720 x D 1720 x H 2280

incl. ventilation and adjustable feet

W 1600 x D 1600 x H 2000

340 Kg

Light grey (approx. RAL 7042)

Other colours available on request

Better than ISO 4043

According DIN 56924\*

13

1600 x 500

yes



Included

Extension sets to 3 or 4 person booth


\* DIN 56924 approved only when the optional double glass is mounted

**SILENT - 6300**  
INTERPRETER BOOTH  
**ISO 4043**  
WWW.AUDIPACK.COM


Silent series sound insulation capacity

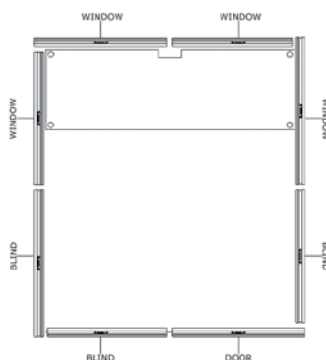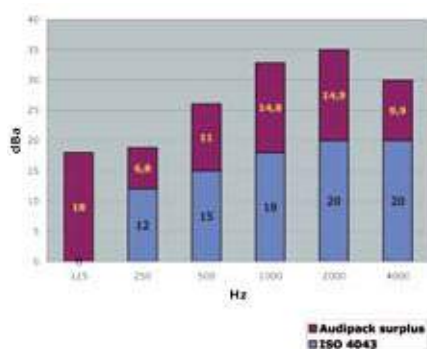

Adjustable feet



Ventilation



Rear view



Cable passage



## 9300-MK II, ISO 4043, PERFECT RENTAL SOLUTION



### Ref.

External dimensions in mm

Internal dimensions

Weight incl. safety glass and table

Colour exterior

Colour interior

Sound insulation capacity

Number of booth parts incl. table

Table dimensions in mm

Ventilation

### P4302

W 1682 x D 1682 x H 2041 excl. ventilation

W 1600 x D 1600 x H 2000

210 Kg

Light grey (approx. RAL 7042)

Other colours available on request

Dark grey and white

Better than ISO 4043

11



1600 x 500

Optional: Ventilation A, fixed (height: 85 mm)

Optional: Ventilation B, detachable (height: 170 mm)

**SILENT-9300MKII**  
INTERPRETER BOOTH  
**ISO 4043**  
WWW.AUDIPACK.COM

Silent series sound insulation capacity

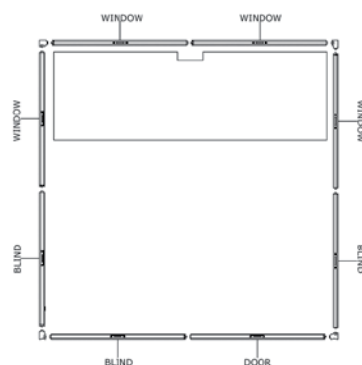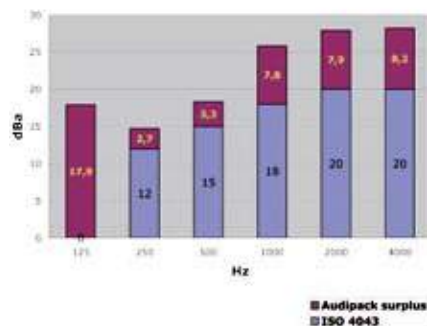

Cable passage




Ventilation A



Panorama view



Ventilation B



## 9300, CLASSIC INTERPRETER BOOTH



### Ref.

External dimensions in mm  
Internal dimensions  
Weight incl. safety glass and table  
Colour exterior

Colour interior  
Sound insulation capacity  
Number of booth parts incl. table  
Table dimensions in mm  
Ventilation

### P1481

W 1682 x D 1682 x H 2041 excl. ventilation  
W 1600 x D 1600 x H 2000  
210 Kg  
Light grey (approx. RAL 7042)  
Other colours available on request  
Dark grey and white  
Better than ISO 4043  
11  
1600 x 500  
Optional: Ventilation A, fixed (height: 85 mm)  
Optional: Ventilation B, detachable (height: 170 mm)

**SILENT - 9300**  
**INTERPRETER BOOTH**  
**ISO 4043**  
[WWW.AUDIPACK.COM](http://WWW.AUDIPACK.COM)



### Ref.

Type  
External dimensions in mm  
Weight incl. safety glass and table


### P4019

1 person booth  
W 814 x D 1682 x H 2041 excl. ventilation  
150 Kg

Silent series sound insulation capacity

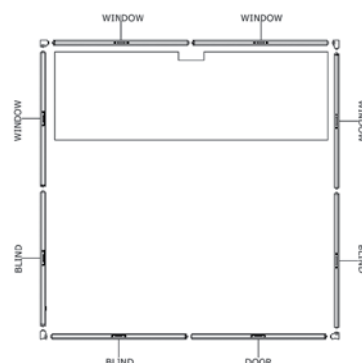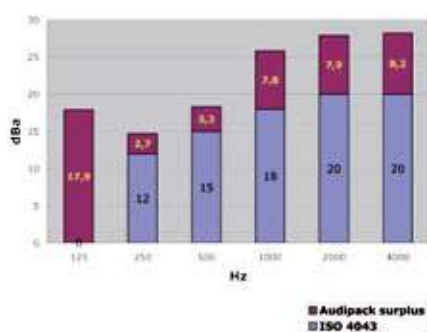

Cable passage




Ventilation A



Table



Ventilation B



## 9400 SILENT SERIES, LIGHT WEIGHT VERSION



### Ref.


External dimensions in mm  
Internal dimensions  
Weight incl. table  
Colour exterior

Colour interior  
Number of booth parts incl. table  
Table dimensions in mm  
Ventilation

### P4301

W 1682 x D 1682 x H 2041 excl. ventilation  
W 1600 x D 1600 x H 2000  
**130 Kg**  
Light grey (approx. RAL 7042)  
Other colours available on request  
Dark grey and white  
11  
1600 x 500  
Optional: Ventilation B, detachable (height: 170 mm)


### LIGHT WEIGHT VERSION

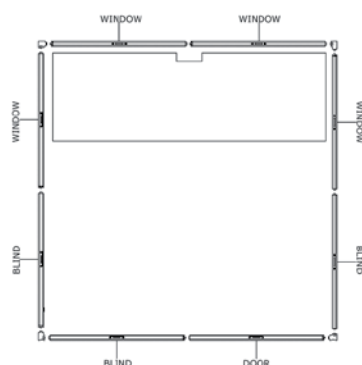

Cable passage



Ventilation B



Panorama view



Light weight



## 9500 SILENT SERIES, ISO 4043, COMPACT IN TRANSPORT



### Ref.



External dimensions in mm  
Internal dimensions  
Weight incl. safety glass and table  
Colour exterior  
  
Colour interior  
Sound insulation capacity  
Number of booth parts incl. table  
Table dimensions in mm  
Including floor  
Ventilation

### P1482

W 1682 x D 1682 x H 2041 excl. ventilation  
W 1600 x D 1600 x H 2000  
210 Kg  
Light grey (approx. RAL 7042)  
Other colours available on request  
Dark grey and white  
Better than ISO 4043  
16  
1600 x 500  
no  
Optional: Ventilation A, fixed (height: 85 mm)  
Optional: Ventilation B, detachable (height: 170 mm)

**SILENT - 9500**  
**INTERPRETER BOOTH**  
**ISO 4043**  
[WWW.AUDIPACK.COM](http://WWW.AUDIPACK.COM)

Silent series sound insulation capacity

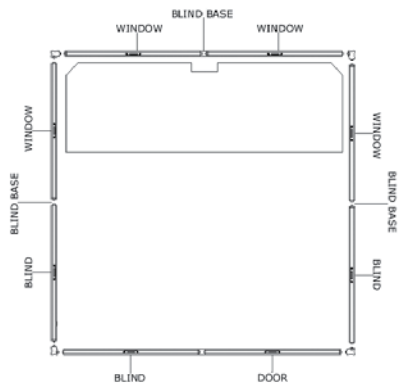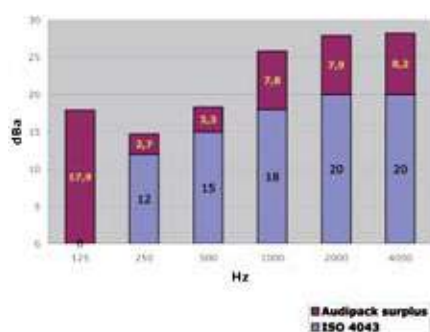

Cable passage



Ventilation A



Table



Ventilation B



## ACCESSORIES

### FLIGHTCASES

Transport your interpreter booth nice and safe in a Audipack flightcase.



### Ref.

Suitable for Booth  
Description

### 5604+5887

6300  
Set of 2

### 15645

9300, 9300 MKII, 9400  
Front loader

### 17495

9300 1 person (P4019)  
Front loader

### 8969

9500, with ventilation B  
Front loader (standing model)


### VENTILATION UNITS

#### Ventilation A



Fixed

#### Ventilation B



Detachable

### Ref.

Suitable for Booth  
Dimensions in mm

### P4500

9300, 9300 MK II, 9500  
W 1490 x D 204 (240) x H 85 mm

### P4501

9300, 9300 MK II, 9400, 9500  
W 274 x D 257 x H 180 mm

ASSEMBLY AID		TRANSPORT CART	
			
Ref.	P1866		P1769

EXTENSION SETS				
	Extension sets to extend an interpreter booth from a 2 person booth to a 3 or 4 person booth.			
Ref.	P4000	P4023	P4304	P4303
Suitable for Booth	6300	9300 classic	9300 MK II	9400
				P4026
				9500

PODIUM, FOR RENTAL PURPOSES, EASY DETACHABLE	
	
Ref.	P5660
Platform dimensions in mm	W 1690 x D 2275
Product dimensions in mm	W 1770 x D 2345 x H 450



# ***Specials and Projects***

## **Audipack, designing your special projects**

*With almost 30 years of experience, Audipack can offer AV project management and project or product consultancy. Our specialist knowledge of product implementation can find you the best solution for any situation.*

### **We will make products especially for you!**

*Our wide range of modern machinery and skills are at your disposal to create any type of bespoke product or solution.*



**Audipack®**

*It's great to have solutions...*

# AV project management & project consultancy



***We will make products especially for you!***


Our use of in-house electronics and production methods ensure that products are well built and reliable.

Audipack primarily uses self-designed electronic PCB's to ensure a high level of product control, from simple single motor drives to complex multi-directional products with safety features. We build in a way that allows external engineers to implement connection and control without the need for PLC (programmable logic controller) programming knowledge.




The basic element of any Audipack solutions are:

- ▲ **Cost efficiency**
- ▲ **Product durability**
- ▲ **Top class components**
- ▲ **User ergonomics**
- ▲ **Preventing product complexity**
- ▲ **Product design**
- ▲ **Product quality**

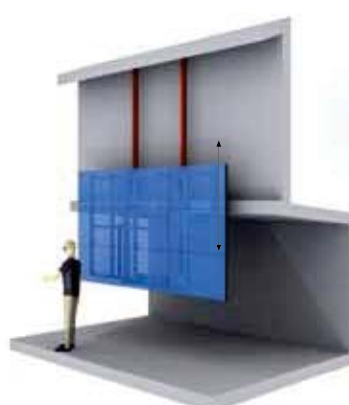

## 1.5 Km seamless projection set-up

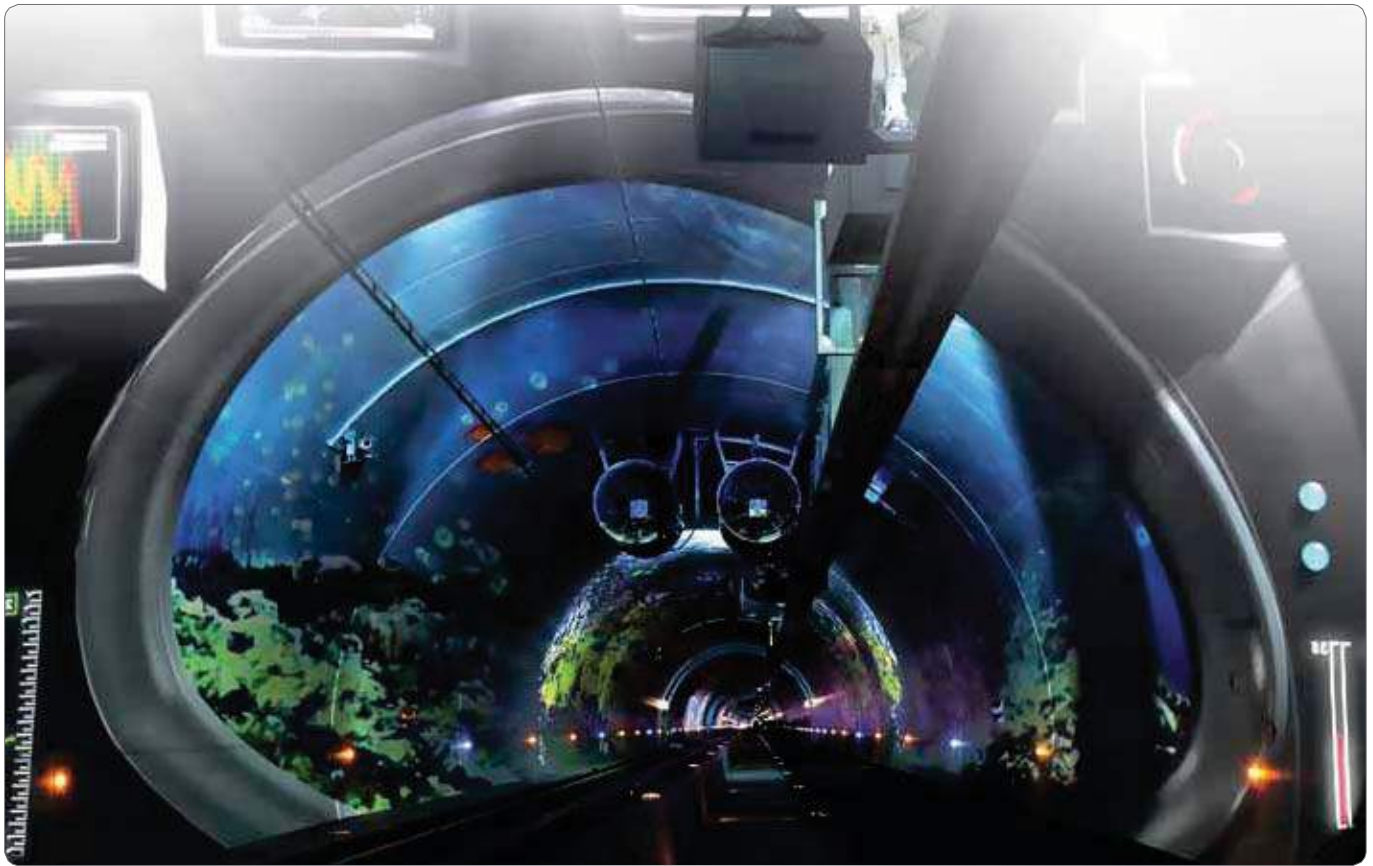

### ***"Impressive project can only be made with impressive products"***

Special for the community of Lyon Together with a French AV partner Audipack has created a 1.5 Km seamless projection set-up with amongst 16K lumen projectors.

The specials designed outdoor housing not only protect the expensive and vulnerable projectors, but also protect them from external environmental influences. Together with special designed 3D adjustable ceiling mounts the housings are accurately installed for the best seamless result.

Not to forget the perfect service access for each projector. With an power drill activated drawer the projector are pulled out under strict control; some projector are installed under steep angles of more than 30 degrees in 2 or 3 axis...

Pedestrians, cyclists and public transportation travellers are being impressed with a fantastic engineered presentation with beautiful images and impressions.



## Back-to-back indoor housings



***The standard Audipack product program is always a very good base to start from to create a new one.***

With little effort existing product- advantages and know-how can be used to modify the base to a complete new product. With a natural synergy between architects and engineers most sophisticated products are generated and fitted for every unique application.

In this case for museums a double screen solution with door entry keyboard and build-in fire department evacuation panel.





## Seamless floor projection set-up



***"The art of cloaking prominent visible equipment without compromising their function".***

That was the challenge at a Belgium project using short throw projectors for a unique floor projection. With special designed ceiling mounts matching the traditional build barn the projectors are installed in specially designed housings.

The housings make it possible to keep the focus on the image, not the housing, silencing the projector sound and keeping internal ventilation and air flow in balance.



## Gamma, the largest paint and DIY specialist of the Netherlands



***In collaboration with Audipack, Mood Media has transformed all Gamma retail shops into some of the most innovative specialists for paint advice and selection.***

Gamma selected Mood Media for the implementation of, among other things, 2 x 2 video walls in all shops. These video walls are used to display commercial content, but also for true colour imaging of colours selected by clients.

For this, Audipack developed a quick to install system that can also easily bring two panels forward for easier access. The Audipack solution included cabinets for the entire video wall to turn the complete system into an easy to install plug-and-play solution.



**Audipack keeps environment and it's inhabitants in mind,  
reduces and minimizes on energy consumption, emissions and waste.**

Creates durable and lasting products using environmental and personal friendly non toxic adhesive materials and coatings.  
Manufacturing with recyclable products and materials,  
Resy packaging, RoHS compliant.



## Product feature guide



**Product available in black RAL 9005,  
grey RAL 9006 and White RAL 9016**



**Max. applicable load on product**



**Advised maximum applicable flat panel size**



**Product with angle adjustment**



**Product manufactured from Stainless steel  
and or in combination with Aluminum AlMg3**



**Product is possible controlled by RS-232 signal  
(Available from spring 2013)**



**Tools required**



**No tools required**



**Water resistant product or suitable for outdoor applications**



**Product with internal ventilation  
(possible thermostatic controlled)**



**Air conditioned product (possible thermostatic controlled)**



**Electric heated product (possible thermostatic controlled)**



**Lockable**



**Align**



**Quick release**



**Left - Center - Right speaker**

### Photo's

Flatpanel with profile speakers, AV at Last Amersfoort	3
Screen with soundbar, Nieuwenhuis beeld en geluid	4
Height adjustable floorstands, Avex	31
Touch table, BPR visie	37
Videowall, BPR Visie	45
Wall mount, Home ID	53
Electric wall arm, Home ID	61
Floor to ceiling solution, Inter Visual Systems	71
Floor to ceiling solution, LP Presentation specialisten	72
Pop-up lift 90 inch, Leferink	100
Indoor housing with open front, Pandora Producties	112
Outdoor housing, Exxeda	114

### Photo's

Outdoor housings, Pandora Producties	116
Eye-point, MK2	120
Eye-Point, Bechtle	112
Outdoor housings, Axians	143
Outdoor housings, Axians	144
Outdoor housings, DB audiovisueel	144
Projector ceiling lift system, Avisie	149
Wereld museum, Bourgonje	150
Mirror-Kit system, Wuestman	161
Tablet housings, Fidato	171
Back-to-back indoor housing, Fidato	193

AP/PRGD/EN/January/2016



Industriestraat 2  
NL-2751 GT Moerkapelle  
The Netherlands  
Tel. +31795931671  
Fax +31795933115  
[audipack@audipack.com](mailto:audipack@audipack.com)  
[www.audipack.com](http://www.audipack.com)

Your Audipack® dealer: